## **Sure**Werx®

Be Smart. Be Safe. Be Sure.<sup>®</sup>





sellstrom. KneePro



PEAKWORKS



www.surewerx.com/usa



## PERSONAL PROTECTIVE EQUIPMENT

JACKSON<sup>®</sup>

sellstrom

KneePro

duenorth

## TABLE OF CONTENTS

370 SPEED DIAL	4– 5
FACE PROTECTION	7–40
EYE PROTECTION—SAFETY GLASSES	41–55
EYE PROTECTION—GOGGLES	56–71
EMERGENCY EYEWASH PRODUCTS	72–74
HEARING PROTECTION	75–83
HEAD PROTECTION	84–101
RESPIRATORY PROTECTION	. 102–103
KNEE AND ELBOW PROTECTION	.104–109
SLIP PROTECTION	. 110–120



The safety and productivity of every professional worker is our goal. Our mission is to design products that deliver on this goal. We are always finding better ways to help increase worker productivity and safety.



Every day, hundreds of professional workers are injured at work industrial accidents are avoidable.



Our goal is to ensure that you return home after a safe and productive day at work in the same healthy condition as you went to work.



Legislation and regulation continue to increase safety at work, and all of our products will meet or exceed the necessary levels.



We will also work to ensure that all of our distributors receive product knowledge training to ensure they provide the right product for the right application. We are committed to understanding the needs of the professional end users.



When workers are confident that their PPE is designed with their health and safety in mind, they can concentrate on the job at hand, achieving maximum productivity.

# ACCIDENTS INJURIES RISK

Reduce



## HEALTH SAFETY PRODUCTIVITY Finding a better way









Engineered detents lock equipment in the up and down position and eliminate "creep"

Three-position slider adjusts distance of the lens from your eyes for precise vision Easy to adjust pinlock upper adjustment band allows proper positioning of face shield

> Extra wide replaceable fabric sweatband for maximum comfort and convenience

"Easy Grip-Easy Turn" rotation allows instant loosening and tightening of the headgear

Patented "quick-fit" rear swivel headband quickly adjusts the suspension to the user's head for superior comfort, convenience, and productivity

> Lock-nut feature keeps components intact even when the bracket is loosened

Fine tooth ratcheting mechanism guarantees a more precise fit without over tightening Oversized soft rubber adjuster dial is easy to find and grab even when wearing gloves



#### The World's Greatest Ratcheting Headgear System—Period!

Our patented Jackson Safety® **370 Speed Dial™** offers the fastest, easiest, and most efficient ratcheting headgear system in the industry today! The 370 Speed Dial<sup>™</sup> incorporates two unique designs—an oversized ratcheting adjuster knob, and a patented "quick-fit" rear headband that swivels up and down. Together, these two features combine to achieve a perfect fit every time, increasing safety, productivity and satisfaction. Try any of our industry-leading Jackson Safety® products that incorporate our famous 370 Speed Dial<sup>™</sup> and experience the difference yourself!







The 370 Speed Dial<sup>™</sup> ratcheting headgear can be found on these exclusive Jackson Safety<sup>®</sup> industry-leading products. More new products coming soon!



#### Jackson Safety<sup>®</sup>—Your First Choice for Premium Safety Products for Over 90 Years!

Please note: Our SC-6 and Blockhead hard hats use a modified version of the face shield/welding helmet version shown. All products feature the exclusive 370 Speed Dial™ for "Easy Grip-Easy Turn" adjustment.

**370 SPEED DIAL** 







## FACE PROTECTION



**Please note:** Always wear safety glasses when using face shields.



JACKSON® SAFETY

> Optional Shade 5 and 8 flip-up visors deliver unmatched versatility and uninterrupted protection

Extra-large anti-fog window provides superior panoramic view Extra-large crown provides added top of head protection



Speed Dial 370™ headgear achieves maximum comfort and fit

Integrated side and chin guard for maximum protection against splash and flying debris

> Hard Hat Interchange system available



## NEW!

## **OUAD<sup>™</sup> 500 FACE SHIELDS**— SUPREME MULTI-PURPOSE

#### Quad<sup>™</sup> 500 Multi-Purpose Face Shield System

- Jackson Safety® introduces the all new Quad 500 multi-purpose face shield, our premium face protection product
- The Quad 500 offers an unparalleled range of face and eye protection solutions for almost every application including grinding, cutting, oxy/acetylene cutting, plasma cutting, and brazing
- All Quad 500 products have been designed to offer maximum above-the-neck face protection, including an extra-large molded polycarbonate window featuring our premium Sta-Clear® anti-fog coating
- For added protection, the molded window is completely framed on the sides and chin and features an extra-large crown
- The Quad 500 offers exceptional panoramic views with virtually no distortion

#### Featuring the exclusive Jackson Safety<sup>®</sup> 370 Speed Dial<sup>™</sup> ratcheting headgear system!

- The Quad 500 features the Jackson Safety® 370 Speed Dial™ ratcheting headgear system—an industry best!
- The 370 Speed Dial™ is highlighted by Jackson's famous "Easy Grab-Easy Turn" oversized adjusting dial and patented swivel adjuster band, achieving maximum comfort and fit quickly, easily, and conveniently—saves time, increases productivity, and improves worker safety!

#### Available with optional flip-up/flip-down extra-large IR window

- The Quad 500 face shield is also available with an exclusive, extra-large flip-up/flip-down IR window for added eye protection when used in applications producing infrared hazards
- It's easy and safe—by keeping the Quad 500 clear window in the down position at all times, the operator can flip the IR shaded window up or down, providing uninterrupted face protection during cutting and grinding operations
- Flip windows available in:
  - Shade 5 IR for oxy/acetylene cutting, brazing, and plasma cutting
  - Shade 8 IR for oxy/acetylene welding and plasma cutting
- Both the clear and flip windows feature detents that lock in both the up and down positions
- Designed to be used with most goggles, respirators, and all safety glasses
- Two available mounting options:
  - Complete with Jackson Safety's premium 370 Speed Dial™ ratcheting headgear suspension
- For mounting on slotted hard hats, assembled with Jackson Safety's exclusive HHIS slot adaptors
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models 14220, 14230, 14233, 14235 CSA certified to CAN/CSA Z94.3 standards
- Models 14220, 14230, 14233 **CE certified**





#### FACE SHIELDS—SUPREME MULTI-PURPOSE

#### Quad<sup>™</sup> 500 Series—Crown, Window, and 370 Speed Dial<sup>™</sup> Ratcheting Headgear

- Face shield comes with:
  - Stylish crown and wraparound face shield frame
  - Premium molded polycarbonate AF window



SPEED DIAL

– 370 Speed	d Dial™ pren	SPE	ED DIAL			
PRODUCT NO.	Crown	Suspension	Window	Coatings	Chin & Side Guard	Case Qty.
14220	Black	Ratcheting	Clear	Anti-fog	Yes	4

#### Quad<sup>™</sup> 500 Series–Crown, Window, and HHIS Universal Hard Hat Slot Adaptor

- Face shield comes with:
  - Stylish crown and wraparound face shield frame
  - Premium molded polycarbonate AF window
  - Exclusive Jackson Safety® HHIS universal slot hard hat adaptor
  - Fits most slotted hard hats

PRODUCT NO.	Crown	Suspension	Window	Coatings	Chin & Side Guard	Case Qty.
14225	Black	Universal Adaptor	Clear	Anti-Fog	Yes	4

#### Quad<sup>™</sup> 500 Series—c/w Flip-Up IR Window and 370 Speed Dial<sup>™</sup> Ratcheting Headgear

- Multi-purpose face shield comes with:
  - Stylish crown and wraparound face shield frame
  - Premium molded polycarbonate AF window
  - Extra-large flip-up/flip-down IR visor
  - 370 Speed Dial™ premium ratcheting headgear suspension

PRODUCT NO.	Crown	Suspension	Window	Coatings	Flip Visor	Chin & Side Guard	Case Qty.
14230	Black	Ratcheting	Clear	Anti-Fog	Shade 5 IR	Yes	4
14233	Black	Ratcheting	Clear	Anti-Fog	Shade 8 IR	Yes	4

#### Quad<sup>™</sup> 500 Series—c/w Flip-Up IR Window and HHIS Universal Hard Hat Slot Adaptor

- Multi-purpose face shield comes with:
  - Stylish crown and wraparound face shield frame
  - Premium molded polycarbonate AF window
  - Extra-large flip-up/flip-down IR visor
  - Exclusive Jackson Safety® HHIS universal slot hard hat adaptor
  - Fits most slotted hard hats

PRODUCT NO.	Crown	Suspension	Window	Coatings	Flip Visor	Chin & Side Guard	Case Qty.
14235	Black	Universal Adaptor	Clear	Anti-Fog	Shade 5 IR	Yes	4
14238	Black	Universal Adaptor	Clear	Anti-Fog	Shade 8 IR	Yes	4

#### Quad<sup>™</sup> 500 Series Replacement Windows & Parts

PRODUCT NO.	Description	Fits Models	Case Qty.
14250	8.58" x 8.24" x .060" Clear Anti-Fog Window	All Quad 500 Models	12
14255	4.375" x 9.25" x .070" Shade 5 IR Visor	All Quad 500 Models	12
14258	4.375" x 9.25" x .070" Shade 8 IR Visor	All Quad 500 Models	12
20694	370 Face Shield Headgear	14220, 14230, 14233	12
38423	HHIS Face Shield Hard Hat Adaptor	14225, 14235, 14238	12





14220



14225



14230/14233



14235 /14238





20694

**FACE PROTECTION** 

## sellstrom.



Please note: Always wear safety glasses when using face shields.

## **DP4 FACE SHIELDS**— PREMIUM MULTI-PURPOSE



\$32010

#### DP4 Multi-Purpose Face Shield System

- Sellstrom's exclusive multi-purpose DP4 face shield system has been an industry leader for more than 15 years
- The DP4 offers an incredible range of face protection solutions

#### **DP4 Face Shield Only**

- As a standard face shield, the DP4's specially designed molded polycarbonate window curves naturally to fit facial contours
- Offers exceptional panoramic views with virtually no distortion
- Window meets high-impact standards and is chemical resistant
- Available in three full-sized window options: clear anti-fog (S32010), Shade 3 IR (S32030) or Shade 5 IR (S32050)
- Standard DP4 face shields feature a premium ratcheting headgear for maximum operator comfort and convenience
- Model S32261 CSA certified

#### FACE SHIELDS—PREMIUM MULTI-PURPOSE

#### DP4 Face Shield with Flip-Up/Flip-Down IR Windows

- The DP4 face shield is also available featuring a unique spring-mounted flip-up/flip-down IR window (4.375" x 9.25" x .070")
- It's easy and safe—by keeping the full size DP4 clear window in the down position at all times, the operator can flip the spring-mounted IR Shaded window up or down, providing uninterrupted face protection during cutting and grinding operations
- Flip visor available in:
  - Shade 5 IR for: oxy/acetylene cutting, brazing and plasma cutting
  - Shade 6 IR for: oxy/acetylene cutting, brazing and plasma cutting
  - Shade 8 IR for: oxy/acetylene welding and plasma cutting
  - Shade 6B Cobalt Blue for: oxy/acetylene welding of aluminum and cast iron, in metal and glass furnace foundry work
  - Cobalt Blue diffuses the orange glow associated with the sodium in molten metal and glass
- DP4 multi-purpose face shields are available in two mounting options: premium ratcheting headgear suspension or exclusive universal slot adaptors (for mounting on slotted hard hats)

#### DP4 Face Shields Now Available With Optional Chin Guard

- All DP4 face shields can be fitted with optional chin guard (S32200) for added below-the-neck protection during cutting and grinding operations
- DP4 Face shields can be ordered with the chin guard included, or if you already own a DP4 face shield, the chin guard can be ordered separately and easily attached by the operator

#### **DP4 Safety Standards**

- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S32010, S32151, S32181, S32251, S32281 CSA certified to CAN/CSA Z94.3 standards
- Model S32010 CE certified





S32151



S32251



## sellstrom.



\$32010



\$32210



\$32012



S32151



S32251

#### FACE SHIELDS—PREMIUM MULTI-PURPOSE

#### DP4 Series-Crown, Window, and Ratcheting Headgear Only

Face shield comes with:

• Stylish crown

- Full 9" x 12.125" x .060" molded polycarbonate AF window
- Premium ratcheting headgear suspension (S32011)
- Model S32210 is CSA certified

PRODUCT NO.	Crown	Suspension	Window	Coatings	Chin Guard	Case Qty.
\$32010	Black	Ratcheting	Clear	Anti-Fog	No	4
\$32030	Black	Ratcheting	Shade 3 IR	Uncoated	No	4
\$32050	Black	Ratcheting	Shade 5 IR	Uncoated	No	4
\$32210	Black	Ratcheting	Clear	Anti-Fog	Yes	4

#### DP4 Series—Crown, Window, and Universal Hard Hat Slot Adaptor Only

Face shield comes with:

• Stylish crown

- Full 9" x 12.125" x .060" molded polycarbonate AF window
- Features Sellstrom's exclusive universal slot adaptors (S61970)
- Fits most slotted hard hats



PRODUCT NO.	Crown	Suspension	Window	Coatings	Chin Guard	Case Qty.
\$32012	Black	Universal Adaptor	Clear	Anti-Fog	No	4
\$32032	Black	Universal Adaptor	Shade 3 IR	Uncoated	No	4
\$32052	Black	Universal Adaptor	Shade 5 IR	Uncoated	No	4
\$32212	Black	Universal Adaptor	Clear	Anti-Fog	Yes	4

#### DP4 Series—c/w Flip-Up IR Window, and Ratcheting Headgear

Multi-purpose face shields come with:

- Stylish crown
- Full 9" x 12.125" x .060" molded polycarbonate AF window
- 4.375" x 9.25" x .070" flip-up/flip-down IR visor
- Premium ratcheting headgear suspension (\$32011)

PRODUCT NO.	Crown	Suspension	Window	Coatings	Flip Visor	Chin Guard	Case Qty.
\$32151	Black	Ratcheting	Clear	Anti-Fog	Shade 5 IR	No	4
\$32161	Black	Ratcheting	Clear	Anti-Fog	Shade 6 IR	No	4
\$32161B	Black	Ratcheting	Clear	Anti-Fog	Shade 6 Cobalt	No	4
\$32181	Black	Ratcheting	Clear	Anti-Fog	Shade 8 IR	No	4
\$32251	Black	Ratcheting	Clear	Anti-Fog	Shade 5 IR	Yes	4
\$32261	Black	Ratcheting	Clear	Anti-Fog	Shade 6 IR	Yes	4
\$32281	Black	Ratcheting	Clear	Anti-Fog	Shade 8 IR	Yes	4

#### FACE SHIELDS—PREMIUM MULTI-PURPOSE

#### DP4 Series—c/w Flip-Up IR Window, and Universal Hard Hat Slot Adaptor

Multi-purpose face shields come with:

- Stylish crown
- Full 9" x 12.125" x .060" molded polycarbonate AF window
- 4.375" x 9.25" x .070" flip-up/flip-down IR visor
- Features Sellstrom's exclusive universal slot adaptors (S61970)
- Fits most slotted hard hats



S61970



#### **DP4 Series Replacement Windows, and Parts**

PRODUCT NO.	Description	Fits Models	Case Qty.
\$32000	Black Crown (only) for Standard Face Shields	All Standard Face Shields	12
\$32001	Black Crown (only) for Flip Front Visor Models	All Flip-Up Face Shields	10
<b>S32003</b> Black Crown with Universal Slot Adaptor for all USA Flip-Up Face Shields Flip-Up Visor Models		All USA Flip-Up Face Shields	30
\$32011	Replacement Ratcheting Headgear	S32010, S32030, S32050, S32151, S32161, S32161B, S32181, S32210, S32251, S32261, S32281	10
\$32100	9" X 12.125" X .060" Clear Anti-Fog Window	All DP4 Models	120
\$32130	9" x 12.125" x .060" Shade 3 IR Window	\$32030	120
\$32150	9" x 12.125" x .060" Shade 5 IR Window	S32050	120
\$32155	4.375" x 9.25" x .070" Shade 5 IR Visor	S32151, S32152, S32153, S32251, S32252	120
\$32166	4.375" x 9.25" x .070" Shade 6 IR Visor	S32161, S32162, S32163, S32261, S32262	120
S32166B	4.375" x 9.25" x .070" Shade 6 Cobalt Blue Visor	S32161B, S32162B, S32163B	120
\$32188	4.375" x 9.25" x .070" Shade 8 IR Visor	S32181, S32182, S32183, S32281, S32282	120
\$32200	Optional Chin Guard only	All DP4 Models	20



S32050





Sellstrom Universal Slot Adapter fits most slotted hard hats.



S32152



S32252





\$32003



S32011





\$32200



Extended top-of-head coverage protects against hazards from above

Extra-large polycarbonate window for superior optics and industry-leading panoramic views

Available with premium Sta-Clear® anti-fog coating

Built-in side and chin guard protects against splash and flying debris Lightweight and balanced construction for all-day comfort

> Up and down detents lock securely in place until manually adjusted



Speed Dial 370 headgear achieves maximum comfort and fit

## MAXVIEW<sup>™</sup> FACE SHIELDS— PREMIUM



#### Maxview<sup>™</sup> Face Shield System

- Jackson Safety® introduces the all new Maxview face shield, a premium face protection product
- The Maxview is designed to offer maximum face protection coverage, incorporating an extra-large clear polycarbonate window that is available in two options: without anti-fog treatment or with our premium Sta-Clear® anti-fog coating
- The high-impact PC window is then framed on the side and chin areas and features an extra-large crown
- This combination translates into maximum coverage, head to lower neck, and side to side. In fact, Maxview offers a full 1" of extra window protection on each side (2" total) versus the leading face shield model, ensuring best-in-class protection and exceptional panoramic views. Check and compare!

MCKSON

- Given its amazing coverage and viewing area, the Maxview is incredibly light
- Maxview incorporates engineered detents that lock in both the up and down positions
- Designed to be used with most goggles, respirators, and all safety glasses
- Two available mounting options:
  - Complete with Jackson Safety's premium 370 Speed Dial<sup>™</sup> ratcheting headgear suspension
  - For mounting on slotted hard hats, assembled with Jackson Safety's exclusive HHIS slot adaptors

#### Featuring the exclusive Jackson Safety® 370 Speed Dial™ ratcheting headgear system!

- The Maxview face shield features the Jackson Safety® 370 Speed Dial™ ratcheting headgear system—an industry best!
- The 370 Speed Dial<sup>™</sup> is highlighted by Jackson's famous "Easy Grab-Easy Turn" oversized adjusting dial and patented swivel adjuster band, achieving maximum comfort and fit quickly, easily, and conveniently—saves time, increases productivity, and improves worker safety!
- All models meet or exceed **ANSI Z87.1+ high impact** standards
- Models 14200, 14201 CSA certified to CAN/CSA Z94.3 standards
- Models 14200, 14201 CE certified

Hard Hat Interchange system available



14

#### FACE SHIELDS-PREMIUM

#### Maxview<sup>™</sup> Series–Crown, Window, and 370 Speed Dial<sup>™</sup> Ratcheting Headgear

- Face shield comes with:
  - Extra-large stylish crown and wraparound face shield frame
  - High-impact polycarbonate window (with or without anti-fog)
  - 370 Speed Dial™ premium ratcheting headgear suspension

PRODUCT NO.	Crown	Suspension	Window	Coatings	Chin & Side Guard	Case Qty.
14200	Black	Ratcheting	Clear	None	Yes	4
14201	Black	Ratcheting	Clear	Anti-Fog	Yes	4

#### Maxview<sup>™</sup> Series–Crown, Window, and HHIS Universal Hard Hat Slot Adaptor

- Face shield comes with:
  - Extra-large stylish crown and wraparound face shield frame
  - High-impact polycarbonate window (with or without anti-fog)
  - Exclusive Jackson Safety® HHIS universal slot hard hat adaptor
  - Fits most slotted hard hats

HARD REA INTERCHANGE

SPEED DIAL

PRODUCT NO.	Crown	Suspension	Window	Coatings	Chin & Side Guard	Case Qty.
14202	Black	Universal Adaptor	Clear	None	Yes	4
14203	Black	Universal Adaptor	Clear	Anti-Fog	Yes	4

#### Maxview<sup>™</sup> Series Replacement Windows & Parts

PRODUCT NO.	Description	Fits Models	Case Qty.
14214	Clear replacement window	All Maxview Models	36
14215	Clear replacement window-Anti-fog	All Maxview Models	36
20695	370 Speed Dial replacement headgear	14200, 14201	12
38424	HHIS Face Shield Hard Hat Adaptor	14202, 14203	6






### **JACKSON**



14200/14201



14202/14203

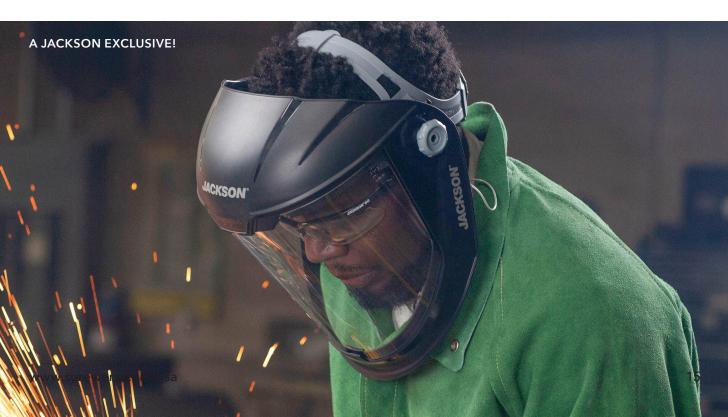



Please note: Always wear safety glasses when using face shields.






S38110

## **380 FACE SHIELDS**— PREMIUM DUAL CROWN

#### **380 Series Face Shields**

- Sellstrom's 380 Series "Dual Crown" face shields have been the industry standard for decades
- Made in the USA, these premium face shields are manufactured using superior, extra wide polycarbonate windows
- Anti-fog models are treated using an exclusive Sta-Clear<sup>®</sup> chemical solution that is superior to other anti-fog treatments
- These face shields are virtually 100% fog free
- The 380 Series "crown and chin" combination offers an exclusive extra-wide side window, as well as oversized crown and chin guards
- You can't buy better protection from splashes, flying particles, and debris
- Complete units feature premium 6.5" x 19.5" x.040" clear, Sta-Clear<sup>®</sup> anti-fog, Shade 5 IR, and dark green tinted windows
- Windows attach using exclusive Sellstrom patterned pin mount design
- Available with exclusive Sellstrom designed Ratchet Headgear suspension (S27051) or Universal Slotted Hard Hat Adapter (S61970)
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S38110, S38140, S38150 CSA certified to CAN/CSA Z94.3 standards
- Models S38110, S38140, S38150, S38410, S38440 CE certified

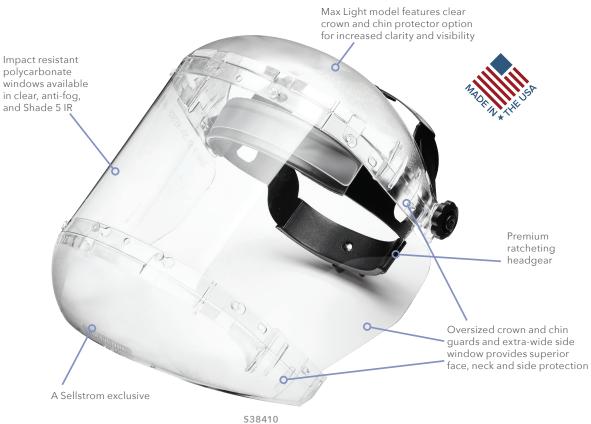

#### 380 Series-Dual Crown, Window, and Ratcheting Headgear

Face shield comes with:

- Extra-large high impact blue crown and chin protector
- Premium polycarbonate extra-wide scratch-resistant windows
- Premium ratcheting headgear suspension (S27051)

PRODUCT NO.	Crown	Chin	Suspension	Tint	Coatings	Case Qty.
\$38110	Blue	Blue	Ratcheting	Clear	Uncoated	4
\$38140*	Blue	Blue	Ratcheting	Clear	Sta-Clear® Anti-Fog	4
\$38150	Blue	Blue	Ratcheting	Shade 5 IR	Uncoated	4

#### 380 Series "MAX LIGHT"-Dual Crown, Window, and Ratcheting Headgear

Face shield comes with:

- Extra-large high impact clear crown and chin protector
- Premium polycarbonate extra-wide scratch resistant windows
- Premium ratcheting headgear suspension (S27051)

PRODUCT NO.	Crown	Chin	Suspension	Tint	Coatings	Case Qty.
\$38410	Clear	Clear	Ratcheting	Clear	Uncoated	4
\$38440*	Clear	Clear	Ratcheting	Clear	Sta-Clear® Anti-Fog	4

\*Please note: Anti-fog windows use an acetate window instead of a polycarbonate window.



\$38110



S38440

## sellstrom



FACE SHIELDS—PREMIUM DUAL CROWN

#### 380 Series—Dual Crown, Window, and Universal Hard Hat Slot Adaptor

Face shield comes with:

- Extra-large high impact blue crown and chin protector
- Premium polycarbonate extra-wide scratch resistant windows
- Exclusive universal hard hat slot adaptor (S61970)
- Fits most slotted hard hats



S61970

PRODUCT NO.	Crown	Chin	Suspension	Tint	Coatings	Case Qty.
\$38210	Blue	Blue	Universal Adaptor	Clear	Uncoated	4
\$38230	Blue	Blue	Universal Adaptor	Dark Green†	Uncoated	4
\$38240*	Blue	Blue	Universal Adaptor	Clear	Sta-Clear® Anti-Fog	4
\$38250	Blue	Blue	Universal Adaptor	Shade 5 IR	Uncoated	4

†Not for use as IR protection

#### 380 Series "MAX LIGHT"-Dual Crown, Window, and Universal Hard Hat Slot Adaptor

Face shields come with:

- Extra-large high impact clear crown and chin protector
- Premium acetate extra-wide scratch resistant windows
- Exclusive universal hard hat slot adaptor (S61970)
- Fits most slotted hard hats



					2018	/0
•	Crown	Chin	Suspension	Tint	Coatings	Case Qty.
	Clear	Clear	Universal Adaptor	Clear	Uncoated	4

PRODUCT NO.	Crown	Chin	Suspension	Tint	Coatings	Case Qty.
\$38510	Clear	Clear	Universal Adaptor	Clear	Uncoated	4
\$38540*	Clear	Clear	Universal Adaptor	Clear	Sta-Clear® Anti-Fog	4

#### **380 Series Replacement Windows**

- Sellstrom carries a wide range of replacement acetate windows
- Available in clear, Sta-Clear™ Anti-Fog, Shade 5 IR, and dark green
- All windows listed below fit the Sellstrom 380 Series dual crown platform
- Windows attachment pattern exclusive to Sellstrom's 380 Series crown

PRODUCT NO.	Window Dimensions	Tint	Coatings	Case Qty.
\$36000	6.5" x 19.5" x.040"	Clear	Uncoated	125
\$36020	6.5" x 19.5" x.040"	Dark Green†	Uncoated	125
\$36040*	6.5" x 19.5" x.040"	Clear	Sta-Clear™ Anti-Fog	125
\$36050	6.5" x 19.5" x.040"	Shade 5 IR	Uncoated	100

†Not for use as IR protection

Please note: For replacement ratcheting headgear, use #S27051.

\*Anti-fog windows use an acetate window instead of a polycarbonate window.



\$38540











S27051



SELLSTRON

## sellstrom.

Single crown style is lightweight and allows for increased air circulation

Impact resistant polycarbonate windows available in clear, anti-fog, and Shade 5 IR

> Available with adjustable ratchet headgear suspension for a custom fit at the turn of the knob.

Patterned pin mount design allows for quick and simple window replacement– requires no tools

Meets ANSI Z87.1+ high-impact standards and CUL certified to meet CAN/CSA Z94.3 standards

## **390 FACE SHIELDS**— PREMIUM SINGLE CROWN

#### **390 Series Face Shields**

- Sellstrom's 390 Series face shields have been the industry standard for decades
- Made in the USA, these premium face shields are manufactured using superior polycarbonate windows
- Anti-fog models are treated using an exclusive Sta-Clear<sup>®</sup> chemical solution that is superior to other anti-fog treatments
- These face shields are virtually 100% fog free
- The shield curves naturally to fit facial contours—excellent protection from splash, chemical splash, particles and flying debris
- Extra-large high impact crown provides excellent above-the-head coverage
- Complete units available with standard 8" x 12" x .040" clear, Sta-Clear<sup>®</sup> Anti-Fog, and Shade 5 IR windows
- Extra-large 8" x 16" x .040" windows are also available (optional)
- Windows attach using exclusive Sellstrom patterned pin mount design
- Headgear models available with pinlock or Sellstrom's exclusive ratcheting headgear suspensions (S27051)
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S39110, S39140, and S39150 CSA certified to CAN/CSA Z94.3 standards



S39110

## sellstrom.



S39010 (Pinlock)



S39110



\$39150



\$39210



\$39250

#### FACE SHIELDS—PREMIUM SINGLE CROWN

#### 390 Series-Single Crown, Window, and Pinlock Headgear

Face shield comes with:

- Extra-large high impact blue crown
- Premium polycarbonate scratch-resistant windows (two sizes available)
- Pinlock headgear suspension

PRODUCT NO.	Crown	Suspension	Window Dimensions	Tint	Coatings	Case Qty.
\$39010	Blue	Pinlock	8" x 12" x .040"	Clear	Uncoated	12
\$39020	Blue	Pinlock	8" x 16" x .040"	Clear	Uncoated	12
\$39040*	Blue	Pinlock	8" x 12" x .040"	Clear	Sta-Clear® Anti-Fog	12
\$39050	Blue	Pinlock	8" x 12" x .060"	Shade 5 IR	Uncoated	12

#### 390 Series-Single Crown, Window, and Ratcheting Headgear

Face shield comes with:

- Extra-large high impact blue crown
- Premium polycarbonate scratch resistant windows (two sizes available)
- Premium ratcheting headgear suspension (S27051)
- Model S39150 is CSA certified

PRODUCT NO.	Crown	Suspension	Window Dimensions	Tint	Coatings	Case Qty.
\$39110	Blue	Ratcheting	8" x 12" x .040"	Clear	Uncoated	12
\$39120	Blue	Ratcheting	8" x 16" x .040"	Clear	Uncoated	12
\$39140*	Blue	Ratcheting	8" x 12" x .040"	Clear	Sta-Clear® Anti-Fog	12
\$39150	Blue	Ratcheting	8" x 12" x .060"	Shade 5 IR	Uncoated	12

#### 390 Series-Single Crown, Window, and Universal Hard Hat Slot Adaptor

Face shield comes with:

- Extra-large high impact blue crown
- Premium polycarbonate scratch resistant windows
- Exclusive universal hard hat slot adaptor (S61970)
- Fits most slotted hard hats



S61970

PRODUCT NO.	Crown	Suspension	Window Dimensions	Tint	Coatings	Case Qty.
\$39210	Blue	Universal Adaptor	8" x 12" x .040"	Clear	Uncoated	24
\$39240*	Blue	Universal Adapter	8" x 12" x .040"	Clear	Sta-Clear® Anti-Fog	24
\$39250	Blue	Universal Adaptor	8" x 12" x .060"	Shade 5 IR	Uncoated	24

\*Please note: Anti-fog windows use an acetate window instead of a polycarbonate window.

#### FACE SHIELDS—PREMIUM SINGLE CROWN



## sellstrom.







\$39200





\$35050





\$39100









S27051

#### 390 Series—Single Crown and Headgear Only (No Window)

Comes with:

- Extra-large high impact blue crown
- Headgear suspension of your choice
- Windows ordered separately (see window assortment below)

PRODUCT NO.	Crown	Suspension	Case Qty.
\$39000	Blue	Pinlock Headgear	20
\$39100	Blue	Ratcheting Headgear	20
\$39200	Blue	Universal Hard Hat Slot Adaptor (S61970 for Slotted Hard Hats)	50

#### **390 Series Replacement Windows**

- Sellstrom carries a wide range of replacement/optional premium polycarbonate windows
- Available in clear, Sta-Clear™ Anti-Fog, Shade 5 IR, and dark green
- All windows listed below can be fitted to the Sellstrom 390 Series crown
- Window attachment pattern exclusive to Sellstrom's 390 Series crown

PRODUCT NO.	Window Dimensions	Tint	Coatings	Case Qty.
\$35000	8" x 12" x .040"	Clear	Uncoated	250
\$35020	8" x 12" x .040"	Dark Green*	Uncoated	250
\$35040	8" x 12" x .040"	Clear	Sta-Clear® Anti-Fog	250
\$35050	8" x 12" x .060"	Shade 5 IR	Uncoated	200
\$35100	8" x 16" x.040"	Clear	Uncoated	200
\$35120	8" x 16" x .040"	Dark Green*	Uncoated	120
\$35140	8" x 16" x .040"	Clear	Sta-Clear® Anti-Fog	200
\$35150	8" x 16" x .040"	Shade 5 IR	Uncoated	120

\*Not for use as IR protection

#### FACE SHIELDS-REPLACEMENT PARTS

#### **Replacement Headgear**

• Sellstrom designed ratcheting headgear allows quick and easy, positive lock adjustability and great operator comfort

PRODUCT NO.	Description	Fits Series	Package Qty.
S27051	Replacement Ratcheting Headgear	311, 380, 390	10/Box







\$31200

## **312 FACE SHIELDS**— PREMIUM ARC FLASH RATED

#### **312 Series Arc Flash Rated Face Shields**

- Sellstrom Arc Flash-rated face shields provide protection from low level arc flash hazards
- Arc flash is created by an electric arc and can result in an explosive condition releasing electromagnetic energy, fragments and molten metals that can cause serious injury
- Sellstrom Arc Flash face shields feature a unique, molded high-impact and splash resistant polycarbonate window
- Provides optimum clarity with no distortion and panoramic vision
- Specially formulated window incorporates a light green tinted window that allows 55% light transmittance and true color optics
- These true color optics allow the operator to see all colors perfectly. This is critical when working around color coded wiring in electrical applications
- Two window versions: 9.9 Cal/cm<sup>2</sup> and 12 Cal/cm<sup>2</sup> ATPV rating
- Face shield curves naturally to fit facial contours, providing superior protection
- Available with or without hard hat, with a dielectric hard hat adaptor

#### **312 Standards**

• All product meets ANSI Z87.1+ high-impact standards, tested and certified to ASTM F-2178 specifications and NFPA 70E-2009 standards

**ARCFLASH**<sup>™</sup>

#### FACE SHIELDS—PREMIUM ARC FLASH RATED

#### 312 Series-Dual Crown, Window, and Ratcheting Headgear

This model comes with:

- Premium ratcheting headgear suspension (\$32011)
- Black high-impact crown and chin protector
- 9.9 Cal/cm<sup>2</sup> molded polycarbonate window

PRODUCT NO.	Crown	Chin	Suspension	Window Dimensions	Treatment	Case Qty.
\$31200	Black	Black	Ratcheting	8" x 15" x .060"	Uncoated	4

#### 312 Series-Dual Crown, Window, and Universal Hard Hat Slot Adaptor

This model comes with:

- Black high-impact crown and chin protector
- Universal slotted dielectric hard hat adaptor (S61970)
- 9.9 Cal/cm<sup>2</sup> molded polycarbonate window

-01
S61970

PRODUCT NO.	Crown	Chin	Suspension	Window Dimensions	Treatment	Case Qty.
\$31201	Black	Black	Universal Adaptor	8" x 15" x .060"	Uncoated	4

#### 312 Series-Window, Adapter Bracket & Hard Hat Combination

This model comes with:

- Sellstrom six-point suspension white hard hat (S69500)
- Dielectric face shield bracket with slot adaptors (S61610)
- 12 Cal/cm<sup>2</sup> molded polycarbonate window

PRODUCT NO. Helmet		Visor	Window Dimensions	Treatment	Case Qty.
\$31223	<b>\$31223</b> White		9.75" x 20" x .060"	Uncoated	4

#### 312 Series-Window and Adapter Bracket with Hard Hat Slot Adapters

This model comes with:

- Dielectric face shield bracket with hard hat slot adaptors (S61610)
- 12 Cal/cm<sup>2</sup> molded polycarbonate window

PRODUCT NO.	Visor	Suspension	Window Dimensions	Treatment	Case Qty.
\$31224	Black	Universal Adaptor	9.75" x 20" x .060"	Uncoated	4

#### 312 Series-Replacement Windows

PRODUCT NO.	Window Dimensions	ATPV Rating	Treatment	Fits Models	Case Qty.
\$31220	8" x 15" x .060"	9.9 Cal/cm <sup>2</sup>	Uncoated	\$31200, 31201, 31202	30
\$31222	9.75" x 20" x .060"	12 Cal/cm <sup>2</sup>	Uncoated	\$31223, 31224	30





S31200



S31201







S31220




FACE PROTECTION



## THE WORLD'S MOST COMPREHENSIVE UNIVERSAL MOUNT FACE SHIELD SYSTEM!

That's right! Jackson Safety® and Sellstrom®, two of the oldest safety brands in America, have joined forces to offer the most comprehensive universal mount face shield program anywhere! Whatever the job, we've got the perfect solution. Check out the next few pages and see for yourself. Our wide range of mounting options include four models of universal mount ratcheting headgear crowns, not the least of which is our new F4XP, featuring Jackson's world-famous **370 Speed Dial™** "comfort fit" headgear. The F4XP is simply the best, most comfortable face shield crown–period! From there, we offer over 15 models of universal mount hard hat face shield brackets, including Jackson's famous **Hard Hat Interchange System** face shield kit, and finally, our range of universal mount face shield windows includes the widest range of shapes, sizes and types under one roof. When you put it all together, there are hundreds of available options and solutions for you to choose from.

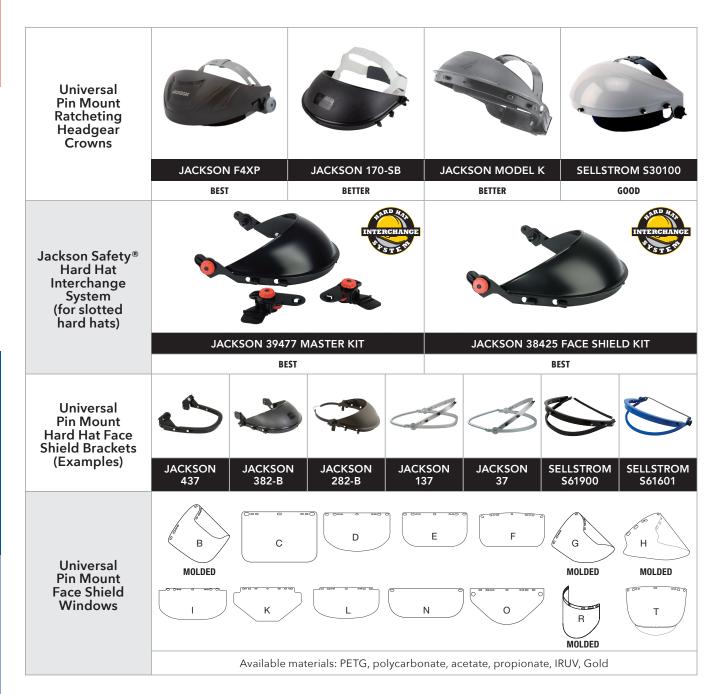

sellstrom

## FACE SHIELDS—CROWNS, HEADGEAR, AND WINDOW KITS (UNIVERSAL MOUNTS)

#### 301/303 Advantage Series

- Sellstrom offers a complete range of basic, economically priced face shields and windows under our Advantage Series program
- ABS injection molded crowns feature universal bracket pin pattern for use with universal mount windows
- Complete units available in single crown (301 Series) and dual crown (303 Series) versions with ratcheting headgear suspension
- Single crown units are available:
  - Complete with standard or aluminum bound windows and ratcheting headgear or;
  - Purchase the crown and headgear only and choose from a wide range of universal mount windows

#### **Advantage Series Standards**

- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S30110, S30120, S30310 CSA certified to CAN/CSA Z94.3 standards
- Models \$30100, \$30110, \$30120 CE certified

#### 301 Series-Single Crown and Ratcheting Headgear Only

- Grey ABS crown and comfortable ratcheting headgear
- Crown can be used to mount all Jackson and Sellstrom universal face shield windows as well as many other common brands found in the North American market
- Extremely versatile face shield mounting system

PRODUCT NO.	PRODUCT NO. Crown Suspension		Window Compatibility	Case Qty.
\$30100	Grey	Ratcheting	Most Universal Face Shield Windows	30

#### 301 Series-Single Crown, Window, and Ratcheting Headgear

- Grey ABS crown and comfortable ratcheting headgear suspension
- Crown can be used to mount all Jackson and Sellstrom universal face shield windows as well as many other common brands found in the North American market
- Comes complete with standard or aluminum bound 8" x 15.5" x .040" clear polycarbonate windows
- Extremely versatile face shield mounting system

PRODUCT NO.	Crown	Suspension	Window	Tint	Treatment	Case Qty.
\$30110	Grey	Ratcheting	Aluminum Bound	Clear	Uncoated	25
\$30120	Grey	Ratcheting	Standard	Clear	Uncoated	25

#### 303 Series-Dual Crown, Window, and Ratcheting Headgear

- New to Sellstrom, this face shield offers both a crown and chin guard for added below-the-neck protection
- Comfortable ratcheting headgear suspension
- Window can be easily replaced (\$37599)

PRODUCT NO.	Crown	Chin	Suspension	Window Tint	Treatment	Case Qty.
\$30310	Grey	Grey	Ratcheting	Clear	Uncoated	16





Universal S30100 pin mount window system

\* GOOD



S30110



\$30120



\$30310

#### A JACKSON EXCLUSIVE!



JACKSON

14262 (kit)

### F4XP

#### F4XP Premium Crown and 370 Speed Dial<sup>™</sup> Ratcheting Headgear

- Jackson Safety<sup>®</sup> introduces the all new F4XP face shield crown and headgear, a premium face protection product
  - a premium face protection product **SPEED DIAL** The F4XP has been specially designed to offer maximum protection, ease of use, and extreme comfort and fit

JACKSON

- The oversized crown is manufactured using premium, high impact-rated materials for optimum safety
- Features an exclusive quick removal mounting system, ensuring fast and easy (universal) window changes
- The F4XP is designed to mount all universal pattern face shield windows including the full range
  of Jackson Safety® windows (F10, F20, F30, F40, and F50), making it one of the most advanced
  and versatile face shield programs in the world!
- Comes standard with a soft fabric replaceable front sweatband for improved comfort
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models 14260 is CSA certified to CAN/CSA Z94.3 standards when used in conjunction with windows 29087, 29080, 29106, and 30706
- Models 14260, 14262 CE certified

#### Featuring the Exclusive Jackson Safety<sup>®</sup> 370 Speed Dial<sup>™</sup> Ratcheting Headgear System

- The F4XP crown features the Jackson Safety<sup>®</sup> 370 Speed Dial ratcheting headgear system an industry best!
- The **370 Speed Dial** is highlighted by Jackson's famous "Easy Grab-Easy Turn" oversized adjusting dial and patented swivel adjuster band, achieving maximum comfort and fit quickly, easily, and conveniently—saves time, increases productivity, and improves worker safety!

#### FACE SHIELDS—CROWNS, HEADGEARS, AND WINDOW KITS (UNIVERSAL MOUNTS)



\*\*\* BEST

#### F4XP Premium Crown, 370 Speed Dial Ratcheting Headgear and Window Kit

PRODUCT NO.	Crown	Suspension	Window	Mounting Pattern	Case Qty.
14260	Black	370 Speed Dial Ratcheting Headgear	None	Universal Bracket Pin Pattern	12
14262 (KIT)	Black	370 Speed Dial Ratcheting Headgear	29087 Clear 8" x 15.5" x .060"	Universal Bracket Pin Pattern	12

#### F4XP Replacement Windows & Parts

PRODUCT NO.	Description	Fits Models	Case Qty.
20695	370 Speed Dial <sup>™</sup> Ratcheting Headgear	14260	12
29087	8 x 15.5" x .060" Clear Molded Replacement Window	14260, 14262	12
38424	HHIS Face Shield Hard Hat Adaptor (option)	14260, 14262	6



14260 (Front)



14262 (kit)

#### F4XP Can be Used with Over 40 Jackson Windows





28

FACE PROTECTIO







14940/29077



14381/29051



29076

#### FACE SHIELDS—CROWNS, HEADGEARS, AND WINDOW KITS (UNIVERSAL MOUNTS)

#### 170-SB-Single Crown and Ratcheting Headgear Only

- Our most popular legacy Jackson ratcheting crown and headgear!
- Features universal bracket pin pattern for use with universal mount windows
- Black injection molded crown and comfortable ratcheting headgear
- Large ratcheting adjuster knob is easy to find and use—even with gloves
- Replaceable sweatband included (#14958)
- Available in 12 pack or 40-piece bulk pack
- Meets ANSI Z87.1+ high-impact and CAN/CSA Z94.3 standards

PRODUCT NO.	Old Code	Crown	Suspension	Mounting Pattern	Case Qty.
14940	3002436	Black	Ratcheting	Universal Bracket Pin Pattern	12
29077	3002447	Black	Ratcheting	Universal Bracket Pin Pattern	40 (bulk)

#### Model K-Single Crown and Ratcheting Headgear Only

- A long-standing Jackson ratcheting crown and headgear!
- Features universal bracket pin pattern for use with universal mount windows
- Black injection molded crown and comfortable ratcheting headgear
- Ratcheting adjuster knob is easy to find and use
- Replaceable sweatband included (#14958)
- Available in 12 pack or 60-piece bulk pack
- Meets ANSI Z87.1+ high-impact and CAN/CSA Z94.3 standards

PRODUCT NO.	Old Code	Crown	Suspension	Mounting Pattern	Case Qty.
14381	3000001	Black	Ratcheting	Universal Bracket Pin Pattern	12
29051	3000006	Black	Ratcheting	Universal Bracket Pin Pattern	60 (bulk)

#### Model 131-B-Single Crown, Pinlock Headgear

- A basic crown and pinlock headgear designed for comfort, fit, and value
- Features universal bracket pin pattern for use with universal mount windows
- Easy-to-use pinlock adjuster mechanism—set it and forget it!
- Black injection molded crown
- Replaceable sweatband included (#14958)
- Meets ANSI Z87.1+ high-impact and CAN/CSA Z94.3 standards

PRODUCT NO.	Old Code	Crown	Suspension	Mounting Pattern	Case Qty.
29076	3000012	Black	Pinlock	Universal Bracket Pin Pattern	12





\*\* BETTER

\*\*

BETTER

\*

GOOD

#### FACE SHIELDS—HARD HAT ADAPTOR BRACKETS

#### JACKSON SAFETY<sup>®</sup> FACE SHIELD HARD HAT ADAPTOR BRACKETS

- Jackson Safety® carries the widest range of face shield hard hat adaptors anywhere
- Range covers adaptors for slotted and non-slotted, regular, and wide brim hard hats
- Available in regular and dielectric models
- All models incorporate the popular universal bracket pin pattern for use with universal mount windows
- Swivel locking pins securely mount windows to bracket
- Vertical lock-in eliminates face shield creep

#### Model A-5500X Slotted Cap Adaptor

- A basic face shield hard hat adaptor bracket
- Curved injection molded channel fits over the hard hat bill
- Vertical lock-in eliminates face shield creep
- Attaches to SC-6, Sentry III®, Charger®, and many other slotted hard hat brands

PRODUCT NO. Old Code		Fits Hard Hat Type	Fits Windows	Case Qty.
14506	3000448	Cap Style (Regular Brim)	Universal Windows	12

#### HHIS Slotted Cap Adaptor with Crown

- A Jackson Safety® exclusive
- Vertical lock-in eliminates face shield creep
- Oversized crown for added safety
- See page 33 for complete details and advantages of the Hard Hat Interchange System
- Attaches to SC-6, Sentry III®, Charger®, and many other slotted hard hat brands

PRODUCT NO.	Old Code	Fits Hard Hat Type	Fits Windows	Case Qty.
38425	N/A	Cap Style (Regular Brim)	Universal Windows	6

#### Model 82 B Slotted Cap Adaptor with Crown

- Vertical lock-in eliminates face shield creep
- Oversized crown for added safety
- Attaches to any hard hat using Jackson's model 87 Mounting Blades (#14939, above)
- #14941 82 B cap adaptor uses plastic detach mounting brackets
- #14949 82 BM cap adaptor uses metal detach mounting bracket

PRODUCT NO.	Old Code	Fits Hard Hat Type	Bracket	Fits Windows	Case Qty.
14941	3002438	Cap Style (Regular Brim)	Plastic	Universal Windows	12
14949	3002446	Cap Style (Regular Brim)	Metal	Universal Windows	12

#### Model 437 Slotted Cap Adaptor-Dielectric

- A popular style dielectric face shield hard hat adaptor bracket
- Curved injection molded channel fits over the hard hat bill
- Dielectric—made entirely of non-conductive materials
- Attaches to SC-6, Sentry III®, Charger®, and many other slotted hard hat brands

PRODUCT NO. Old Code		Old Code	Fits Hard Hat Type	<b>Fits Windows</b>	Case Qty.
	14947	3002444	Cap Style (Regular Brim)	Universal Windows	12

#### Model 382 B Slotted Cap Adaptor with Crown–Dielectric

- Vertical lock-in eliminates face shield creep
- Oversized crown for added safety
- Dielectric—made entirely of non-conductive materials
- Attaches to SC-6, Sentry III®, Charger®, and many other slotted hard hat brands

PRODUCT NO.	Old Code	Fits Hard Hat Type	Fits Windows	Case Qty.
14944	3002441	Cap Style (Regular Brim)	Universal Windows	12
14951	3002449	Cap Style (Regular Brim)	Universal Windows	40 (Bulk)





14506



38425



14941



14949



14947



14944/14951













14391



14948



14390



14943/14952



14942

30

#### FACE SHIELDS—HARD HAT ADAPTOR BRACKETS

#### FACE SHIELD BRACKETS FOR CAP STYLE NON-SLOTTED HARD HATS (REGULAR BRIM)

- Jackson offers five styles of face shield brackets for cap style (regular brim) hard hats
- Three models feature curved metal channels that fit over the hard hat brim
- Two models feature oversized crowns for added protection
- A hard hat face shield bracket for all applications

#### Model P Cap Adaptor

• Vertical lock-in eliminates face shield creep



- Curved metal channels fit over the hard hat brim
- Brackets feature durable expandable spring tensioner—self adjusts
- Features three easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III®, Charger®, and many other hard hat brands

PRODUCT NO.	ICT NO. Old Code Fits Hard Hat Type		Fits Windows	Case Qty.
14391	3000034	Cap Style (Regular Brim) Universal Windows		24

#### Model 137 Cap Adaptor

- Vertical lock-in eliminates face shield creep
- Curved metal channels fit over the hard hat brim
- Brackets feature durable expandable spring tensioner—self adjusts
- · Features five easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III®, Charger®, and many other slotted hard hat brands

PRODUCT NO.         Old Code           14948         3002445		Fits Hard Hat Type	Fits Windows	Case Qty.
		Cap Style (Regular Brim)	Universal Windows	12

#### Model C Cap Adaptor

- Vertical lock-in eliminates face shield creep
- Curved metal channels fit over the hard hat brim
- Can also be used with the hard hat in reverse donning mode
- Brackets feature durable expandable spring tensioner—self adjusts
- Features easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III<sup>®</sup>, Charger<sup>®</sup>, and many other hard hat brands

PRODUCT NO.	Old Code	Fits Hard Hat Type	<b>Fits Windows</b>	Case Qty.
14390	3000032	Cap Style (Regular Brim)	Universal Windows	24

#### Model 282-B Cap Adaptor with Crown

- Vertical lock-in eliminates face shield creep
- Oversized crown for added safety •
- Specially designed metal clips press over the hard hat rim for maximum stability and firm fit
- Features five easy-to-swivel lock mounting pins for universal windows
- An extremely popular cap adaptor
- Attaches to SC-6, Sentry III®, Charger®, and many other hard hat brands

PRODUCT NO.	Old Code	Fits Hard Hat Type	Fits Windows	Case Qty.
14943	3002440	Cap Style (Regular Brim)	Universal Windows	12
14952	3002450	Cap Style (Regular Brim)	Universal Windows	40 (Bulk)

#### Model 182 B Cap Adaptor with Crown

- Vertical lock-in eliminates face shield creep
- Oversized crown for added safety
- Features five easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III®, Charger®, and many other hard hat brands

PRODUCT NO.	Old Code	Fits Hard Hat Type	Fits Windows	Case Qty.
14942	3002439	Cap Style (Regular Brim)	Universal Windows	12

**Reverse Donning** 

#### FACE SHIELDS—HARD HAT ADAPTOR BRACKETS



- Two models for use with most cap style, non-slotted hard hats
- Dielectric—made entirely of non-conductive materials
- Ideal for arc flash and electrical work

#### Model A-5500SN Non-Slotted Cap Adaptor-Dielectric

- A basic dielectric face shield hard hat adaptor bracket
- Curved injection molded channel fits over the hard hat bill
- Features adjustable rubber cord headband that stretches around the cap crown for a secure fit
- Features three easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III<sup>®</sup>, Charger<sup>®</sup>, and many other hard hat brands

PRODUCT NO.	Old Code	Fits Hard Hat Type	Fits Windows	Case Qty.
14505	3000447	Cap Style (Regular Brim)	Universal Windows	12

#### Model 337 Non-Slotted Cap Adaptor-Dielectric

- A popular style dielectric face shield hard hat adaptor bracket
- Curved injection molded channel fit over the hard hat brim
- Features adjustable rubber strap headband that stretches around the cap crown for a secure fit
- Features five easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III®, Charger®, and many other hard hat brands

PRODUCT NO.	Old Code	Fits Hard Hat Type	Fits Windows	Case Qty.
14946	3002443	Cap Style (Regular Brim)	Universal Windows	12

#### FACE SHIELD BRACKETS FOR FULL BRIM NON-SLOTTED HARD HATS (WIDE BRIM)

- Jackson offers two styles of face shield brackets for full brim hard hats
- Featuring curved metal channels that fit over the hard hat brim

#### **Model H Cap Adaptor**

- Vertical lock-in eliminates face shield creep
- Curved metal channels fit over the hard hat brim
- Brackets feature durable expandable spring tensioner—self adjusts
- Features three easy-to-swivel lock mounting pins for universal windows
- Attaches to Blockhead and many other full brim hard hat brands

PRODUCT NO.	Old Code	Fits Hard Hat Type	Fits Windows	Case Qty.
14393	3000038	Full Brim	Universal Windows	24

#### Model 37 Cap Adaptor

- Vertical lock-in eliminates face shield creep
- Curved metal channels fit over the hard hat brim
- Brackets feature durable expendable spring tensioner—self adjusts
- Features five easy-to-swivel lock mounting pins for universal windows
- Attaches to Blockhead and many other full brim hard hat brands

PRODUCT NO.	Old Code	Fits Hard Hat Type	<b>Fits Windows</b>	Case Qty.
14945	3002442	Full brim	Universal Windows	12





14505



14946



For wide brim hard hats



14945



SELLSTRON

## sellstrom



S61602



S61900



S61600





S61610



\$61970

#### FACE SHIELDS—HARD HAT ADAPTOR BRACKETS

#### Face Shield Brackets for Non-Slotted Hard Hats

- Heavy-duty aluminum face shield bracket adaptors
- Brackets feature expandable spring tensioner—self adjusts
- Two bracket styles:
  - S61602 fits most wide brim hard hats
  - S61900 fits most cap style hard hats
- Three positive lock positions: down, 45 and 90 degree up
- Swivel-locking pins conveniently mount windows to bracket
- Universal bracket pin pattern is designed to accommodate most universal window brands

PRODUCT NO.	Fits Hard Hat Type	Fits Windows
S61602	Wide Brim	Universal Windows
S61900	Cap Style	Universal Windows

#### FACE SHIELDS-HARD HAT ADAPTOR BRACKETS-DIELECTRIC

- Dielectric-made entirely of non-conductive materials
- Ideal for arc flash and electrical work
- Brackets fit most cap style hard hat brims
- Three positive lock positions: down, 45 and 90 degree up
- Swivel-locking pins conveniently mount windows to bracket
- Universal bracket pin pattern is designed to accommodate most universal window brands

#### Face Shield Brackets for Non-Slotted Hard Hats—Dielectric

- Bracket features expandable rubber tensioner—self adjusts
- For non-slotted hard hats

PRODUCT NO.	Fits Hard Hat Type	Fits Windows
S61600	Cap Style	Universal Windows
S61601	Full Brim	Universal Windows

#### Face Shield Brackets for Slotted Hard Hats—Dielectric

- Bracket features universal hard hat slot adaptor
- For slotted cap style hard hats

PRODUCT NO.	Fits Hard Hat Type	Fits Windows
\$61610	Cap Style	Universal Windows

#### UNIVERSAL SLOTTED HARD HAT ADAPTOR-DIELECTRIC

- Exclusive universal slotted hard hat adaptor makes mounting of Sellstrom face shields and/or welding helmets to slotted hard hats simple and easy
- Designed to fit Sellstrom's DP4, 380, and 390 Series face shields and 280, 290, Titan, and Smartweld welding helmets
- Dielectric-made entirely of non-conductive materials • Provides an overall secure and tight mount

•

PRODUCT NO.	Description	Fits Windows
S61970	Universal Slotted Hard Hat Adaptor	DP4, 280, 290, 380, 390 Series

#### EXCLUSIVE!

#### Hard Hat Interchange System

**The All-In-One Safety Solution.** Injuries can happen in a split second. Now it's easy to stay protected with the Jackson Safety® Hard Hat Interchange System. It lets you add, remove, or switch between your face shield or welding helmet, without removing your head protection. In accordance with ANSI Z87.1, the system was designed to protect against multiple combinations of hazards. Remain safe, productive, and compliant with the Hard Hat Interchange System. It's worker preferred and safety manager enforced.

- Quickly switch between face shields and welding helmets without removing hard hats
- Meets ANSI standards when PPE products are used separately or combined
- Hear the audible click—Know your PPE is assembled correctly without the need for visual inspection
- One-button action provides quick release
- Vertical lock-in eliminates the annoyance of helmet creep
- HHIS headgear system comes fully assembled and ready to use
- Made from lightweight polypropylene
- Dielectric—Keeps your hard hat Class E rated!

	CODE	Description	Case Qty.
	39477	HHIS Master Kit contains all components necessary to mount welding helmets and face shields to your hard hat	6
<b>~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~</b>	38423	Replacement HHIS kits for 14225/14235/14238 QUAD 500™	6
<b>***</b> 🖗 🖗	38424	Replacement HHIS kits for 14202/14203 MAXVIEW™ and 14260/14262 F4XP	6
	38425	HHIS Face Shield Kit contains all components necessary to mount face shields to your hard hat	6
Helmet not included	38426	HHIS Welding Helmet Kit contains all components necessary to mount welding helmets to your hard hat	6
	39476	Replacement mounting brackets for SC-6 series hard hats	6

Look for the Hard Hat Interchange System (HHIS) on these new Jackson products:



MAXVIEW<sup>™</sup>



14202, 14203



14225, 14235, 14238





#### It's as Easy as 1, 2, 3!



Attach HHIS hard hat mounting bracket (with exclusive quick release button) to cap style slotted hard hat.



Attach HHIS hard hat mounting blades to any Jackson face shield or welding helmet product.



Pushing the HHIS quick release button allows fast and easy attachment/removal of face protection without ever removing your hard hat!





HHIS Mounting Brackets



#### FACE SHIELDS—UNIVERSAL PIN MOUNT WINDOWS/VISORS

- Used in conjunction with protective eyewear, Jackson Safety® face shields provide a high degree of on-the-job protection for heat applications as well as grinding, flying debris, splash protection, and more
- All Jackson Safety<sup>®</sup> face shields meet ANSI Z87.1 Standards when used with any Jackson Safety<sup>®</sup> headgear (except for #28765)
- Universal bracket pin pattern is designed to accommodate most universal window brands including Kedman, Crews, Wilson, North, Jackson, and Sellstrom

F60	Wire Face Shields
F50	Polycarbonate Special Face Shields
F40	Propionate Face Shields
F30	Acetate Face Shields
F20	Polycarbonate Face Shields
F10	PETG Face Shields

#### MATERIAL TYPES

PETG	• A low-cost, recyclable option, ideal for general debris and splash protection
Polycarbonate	<ul> <li>Premium impact protection</li> <li>Good performance against heat</li> <li>Excellent cold flexibility</li> <li>Excellent clarity</li> </ul>
Acetate	<ul> <li>Robust combination of weight and strength</li> <li>Excellent cold flexibility</li> <li>Scratch and chemical resistant</li> <li>Optimum clarity</li> </ul>
Propionate	Lightweight and chemical resistant
Wire Mesh	<ul> <li>Wear with face shield to dissipate heat</li> <li>Ideal for flying-debris applications</li> </ul>

• Air flow for comfort

#### LENS TINTS

#### Clear

Allows for maximum visible-light transmission.

#### IRUV

h

Worn for applications and in environments where others are performing welding tasks such as torch brazing, torch soldering, gas welding, and oxygen cutting. Available in Shades 3.0 and 5.0.

#### SPECIAL TINTS

Enhances vision and reduces glare by blocking light transmission. Available in light, medium, and dark green tints, as well as aluminum, copper, and gold coated to deflect heat in high-heat applications.

#### WARNING: APPLICATIONS & SAFETY

Face shields do not provide unlimited eye and face protection—primary eye protection (safety eyewear or goggles) must be worn.

Recommended Applications	F10 PETG	F30 Acetate & F40 Propionate	F20 Polycarbonate & F50 Polycarbonate Special	F60 Wire Mesh
	GOOD	BETTER	BEST	
Light industrial manufacturing	•	•	•	
Cutting or grinding metal			● (IRUV only)	
Cutting wood			•	•
Splash (general)	•	•	•	
Impact		•	•	
High-heat applications			•	•
Landscaping	•	•	•	•
Food processing	•	•	•	
Scratch resistance		•		
High impact			•	



JACKSON SAFETY

#### FACE SHIELDS—UNIVERSAL PIN MOUNT WINDOWS/VISORS



#### **F10 PETG Face Shields**

				Meets	ANSI Z87.1 St	andards		STE H
PRODUCT NO.	Old Code	Shade	Dimensions (L" x W" x T")	Case Count	Shape	Bound	Compatible with Hard Hat Interchange System	Made in USA
28765*	3005392	Clear	6" x 15.5" x .040"*	36	Ν	Unbound		•
28764**	NEW!	Clear AF	8" x 15.5" x .035"	96	Ν	Unbound		•
29107	NEW!	Clear AF	8" x 15.5" x .035"	96	E	Unbound	•	•
29104	3005399	Clear	8" x 15.5" x .040"	100	E	Unbound	•	•
29101	3005382	Medium Green	8" x 15.5" x .040"	36	E	Unbound	•	•
28962	3029190	Clear	9" x 15.5" x .040"	50	D	Bound	•	•
28963	3029191	Clear	9" x 15.5" x .040"	50	D	Unbound	•	•

For more information about the Hard Hat Interchange System, refer to page 33.

Compatible with Hard Hat

Interchange System

•

•

Т



\*Model 28765 does not meet ANSI Z87.1 standards due to limited coverage

Shade

Clear

Medium Green

Dark Green

Clear

Е

\*\*Please note: 28764 and 28765 windows are designed specifically to fit on Jackson bump caps with face shield attachment.

Dimensions

(L" x W" x T")

8" x 15.5" x .040"

8" x 15.5" x .060" (Molded)

8" x 15.5" x .060"

8" x 15.5" x .060"

9" x15.5" x .040"

9" x 15.5" x .060" (Molded)

9" x 19.25" x .060"

10" x 20" x .040"

F

#### F20 Polycarbonate Face Shields

Old Code

3005372

3005373

3005379

3005371

3005378

3000449

3002832

3009492

3005375

NEW!

NEW!

3005385

3005377

D

PRODUCT

NO.

30706\*

29097\*

29100\*

29096\*

29099\*

29062\*

29087\*

29109\*

14132\*

29106\*

29057\*

29103\*

29098

В

MOLDED

\*CSA Z94.3 Compliant ▲ Chin Cup

All models meet or exceed ANSI Z87.1+ high impact standards. Models 29087, 29106, and 30706 are CSA certified to CAN/CSA Z94.3 standards when combined with Jackson models 14260 F4XP headgear, or when combined with an SC-6 hard hat and 38425 HHIS hard hat adaptor.

**Case Count** 

36

36

36

25

36

12

12

12

36 (bulk)

96

12

36

36

Κ

Shape

E

Ε

Ε

Е

F

Т

В

Е

F

D

R

L

Κ

Bound

Unbound

Unbound

Unbound

Bound

Unbound

Unbound

Unbound

Unbound

Unbound

Bound

Unbound

Unbound

Unbound

L



Made

in USA

	<u> </u>
	$\sim$
	ິ
	5

R

MOLDED



#### FACE SHIELDS-UNIVERSAL PIN MOUNT WINDOWS/VISORS

0

#### F30 Acetate Face Shields

				Meets	ANSI Z87.1 St	andards		VASTE
CODE	Old Code	Shade	Dimensions (L" x W" x T")	Case Count	Shape	Bound	Compatible with Hard Hat Interchange System	Made in USA
<b>29078</b> <sup>2</sup>	3002806	Clear	8" x 12" x .040"	24	С	Bound	•	•
29052	3000122	Clear	8" x 15.5" x .040"	24	E	Bound	•	•
29053	3000123	Medium Green	8" x 15.5" x .040"	24	D	Bound	•	•
29054	3000125	Clear	8" x 15.5" x .060"	24	E	Bound	•	•
29060	3000411	Clear	9" x 15" x .040"	24	Р	Unbound	•	•
29092	NEW!	Clear	9" x 15.5" x .040"	35	D	Unbound	•	•
29079	3002808	Clear	9" x 15.5" x .040"	24	D	Bound	•	•
29091	3002848	Clear	9" x 15.5" x .040"	50 (Bulk)	D	Bound	•	•
29082	3002817	Light Green	9" x 15.5" x .040"	12	D	Bound	•	•
29090	3002845	Dark Green	9" x 15.5" x .040"	50	D	Bound	•	•
29083	3002826	Clear	9" x 19.5" x .040"	12	I	Unbound	•	•
29056	3000136	Clear	9" x 19.5" x .040"	24	0	Unbound	•	•
14445	3000146	Clear	9" x 20" x .040"	12	Q	Unbound	•	•

#### A Chin Cup

<sup>2</sup> Face Shield 29078 does not meet ANSI Z87.1 splash protection requirements when used with headgear 29076

D

#### F40 Propionate Face Shields-Molded

С

				Meets	ANSI Z87.1 St	andards		The state
CODE	Old Code	Shade	Dimensions (L" x W" x T")	Case Count	Shape	Bound	Compatible with Hard Hat Interchange System	Made in USA
29084	3002830	Clear	9" x 15.5" x .060"	12	G	Unbound	•	•
29089	3002843	Clear	9" x 15.5" x .060"	50 (Bulk)	G	Unbound	•	•
29086	3002831	Dark Green	9" x 15.5" x .060"	12	G	Unbound	•	•
28766	3000175	Clear	10" x 20" x .060"	1	Н	Unbound	•	•

Е

I



#### F50 Polycarbonate Special Face Shields-Molded-Premium Clarity & Impact Protection



All models meet or exceed ANSI Z87.1+ high impact standards. Model 29080 is CSA certified to CAN/CSA Z94.3 standards when combined with Jackson models 14260 FAXP headnear, or when combined with an SC-6 hard bat and 38425 HHIS hard bat adaptor

CODE	Old Code	Shade	Dimensions (L" x W" x T")	Case Count	Shape	Bound	Compatible with Hard Hat Interchange System
26262*	3002813	IRUV 3.0	8" x 15.5" x .060"	12	В	Unbound	•
29080*	3002810	IRUV 5.0	8" x 15.5" x .060"	12	В	Unbound	•
28633*	3002838	IRUV 5.0	8" x 15.5" x .060"	50 (Bulk)	В	Unbound	•
29058	NEW!	IRUV 3.0	9" x 15.5" x .060"	12	R	Unbound	•
29059	NEW!	IRUV 5.0	9" x 15.5" x .060"	12	R	Unbound	•
28634*	3000162	Gold	10" x 20" x .060"	1	Н	Unbound	•
29075	NEW!	Alum	10" x 20" x 060"	12	R	Unbound	•
29085	NEW!	Copper	10" x 20" x 060"	12	R	Unbound	•
29088	NEW!	Gold	10" x 20" x 060"	12	R	Unbound	•



36





Aluminum-Basic heat deflection/protection Copper-Medium-to-high heat deflection/protection Gold-High heat deflection/protection

#### FACE SHIELDS—UNIVERSAL PIN MOUNT WINDOWS/VISORS



#### F60 Wire Mesh Face Shields

					Meets ANS	Z87.1 Standards	
CODE	Old Code	Shade	Dimensions (L" x W" x T")	Case Count	Shape	Bound	Other
<b>29102</b> <sup>3</sup>	3005383	Mesh	6.5" x 15.5" x .020"	30	Ν	Bound	6513 Mesh Steel
29055*	3000127	Mesh	8" x 15.5" x .020"	12	С	Bound	815 Mesh Steel
29081*	3002812	Mesh	9" x 15.5" x .016"	12	E	Bound	40 Mesh Steel
		000 0 000		0 000 0			



\*CSA Z94.3 Compliant

<sup>3</sup> Fits only with headgear codes 14381 and 29051.

Wire mesh face shields are not splash protectors. Not intended for high-impact protection. Apply over a face shield to dissipate heat.

#### Safe 2 Protection System

- System is designed for slotted caps
- Face shield bracket features an encapsulated stainless steel spring which ensures that the face shield stays in the selected position
- Face shields are shaped to follow the contours of the face
- Hard hat, bracket, face shield, and ear muffs all sold separately

С

CODE	Old Code	Description	Case Count
16797	3005410	Face Shield/Ear Muff Bracket (only)	1/Box
25973	3005401	Clear High Impact Polycarbonate Window-Bound	25/Box
16800	3005415	Face Shield-Nylon Mesh	1/Box
16799	3005413	Face Shield-Steel Mesh	1/Box
20776	3015091	Capmount Ear Muffs-Orange NRR 22	1/Box
20777	3015092	Capmount Ear Muffs-Red NRR 25	1/Box
20778	3015093	Capmount Ear Muffs–Black NRR 27	1/Box











S37701



#### FACE SHIELDS-UNIVERSAL PIN MOUNT WINDOWS/VISORS

• Sellstrom offers a wide range of universal pin pattern windows to meet your every need

• All models meet ANSI Z87.1+ high-impact standards



PRODUCT NO.	Dimensions (L" x W" x T")	Description	Compatible with Hard Hat Interchange System
\$37040	8" x 16" x .040"	Clear Molded Acetate Window–Anti-Fog	•
\$37050	8" x 16" x .060"	Shade 5 IR Acetate Window	•
\$37600	8" x 15.5" x .040"	Clear Aluminum Bound Window	•
\$37601	8" x 15.5" x .040"	Clear Polycarbonate Window	•
\$37701	9" x 15" x .060"	Clear Molded Spherical PC Window–V-Shape	•

**Please note:** These universal windows mount on all Sellstrom and Jackson universal pin mount window systems, such as F4XP, 170-SB, Model K, and 301 Series headgear, as well as all hard hat adapters

#### FACE SHIELD WINDOWS-FIBRE-METAL®

- Sellstrom carries replacement windows for three Fibre-Metal® face shield models: 4118, 4178, and 4199
- Meet ANSI Z87.1+ high impact standards

PRODUCT NO.	Dimensions (L" x W" x T")	Description	Fits Fibre Metal Crown
\$37606	8" x 11" x .040"	Clear Polycarbonate	4118
\$37607	8" x 16.5" x .040"	Clear Polycarbonate	4178
\$37608	9.75" x 19" x .040"	Clear Polycarbonate	4199

Fibre-Metal® is a registered trademark of Honeywell.



# JACKSON SAFETY

#### FACE SHIELDS—SPLASH PROTECTION

#### **Disposable Splash Face Shield**

- Disposable cost-effective splash protection
- Large viewing window
- Foam sweatband
- Secure fit headband with foam insert
- Anti-fog and anti-scratch for optical clarity
- Individually wrapped
- Not intended for impact use
- Meets EN1731: Personal Eye Protection standards for mesh eye and face protectors

PRODUCT NO.	Window	Dimensions (L" x W" x T")	Window Shape	Window Tint	Headband	Case Qty.
14360	PET Anti-Fog	8.66" x 12.5" x .008"	D	Clear	Elastic	250


#### MFS-320 Reusable Splash Face Shield

- Ideal for splash protection against liquids and body fluids for healthcare workers, first responders, and in food processing applications
- Safeguards against splash and dust in a wide range of general use applications • Easy-to-install/replace window—quickly snap on or off the headband for
- maximum convenience
- Extra-large full face coverage for superior protection—check and compare!
- Reusable design—significantly reduces landfill waste and saves on disposal costs!
- Window features an anti-fog coating not found on most other face shields keeps your vision clear and safe!
- Baseball cap-style pinlock head strap ensures quick and easy adjustments just set it and forget it!
- Window and headband made with recyclable materials and are both replaceable
- A premium yet cost-effective face shield solution—a Jackson Safety exclusive
- Not designed for use in high impact applications!
- Meets ANSI Z87.1 D3 standards

PRODUCT NO.	Window	Dimensions (L" x W" x T")	Window Shape	Window Tint	Headband	Sweatband	Case Qty.
14350	PET Anti-Fog	9" x 14" x .020"	E	Clear	LDPE Pinlock	#1 Density PU Foam	24
W	Swe	eatband Replac	ement Product	No.			
		14356 (	24/case)				

Model numbers 14350 and 14360 are manufactured in a FDA-registered facility and are FDA listed. Each prominently display a health industry bar code on its packaging.

PRODUCT NO.	UDI Number
14350	+B954143501+
14360	+B954143601%









14360

JACKSO

14350



www.surewerx.com/usa



### **EYE PROTECTION** SAFETY GLASSES

IIIst Politi

## CLEARLY ESSENTIAL

www.surewerx.co



### **LEGENDARY STYLE & PERFORMANCE!**

Frames are lightweight for all-day comfort Specially formulated ultra-strong material provides unmatched durability and toughness



All models come complete with a convenient neck cord to prevent loss

Meets Z87.1 ANSI specifications and provides 99.9% U.V. protection Soft nose piece offers superior comfort Variety of styles available for maximum safety and productivity

Wraparound-style

lenses extend protection to the periphery

> All standard packs of 12 come with an attractive ready-to-use retail dispenser box

Soft touch temples

are slip resistant and provide comfort for hours on end



### JACKSON® SG SAFETY GLASSES— Premium

JACKSON SG

#### JACKSON® SG Series Safety Glasses

- Introducing the all new JACKSON® SG series, a premium eye protection product offering outstanding fit, comfort, protection, style, and durability
- Specially designed to offer maximum eye coverage and protection, incorporating a variety of lens shades and coatings
- Made with premium virgin polycarbonate high impact, optically correct wrap style lenses, providing 99.9% UV protection
- Soft temples are curved inwards from front to back to ensure a super comfortable, slip-resistant fit
- As an added advantage, the temple tips are extremely flexible, further ensuring a snug fit while relieving any undue pressure to the user these glasses are extremely comfortable and stay on during use!
- Frames have been developed using a specially formulated ultra-flexible, ultra-strong base material that provides incredible durability, significantly reducing breakage—check and compare!
- The lightweight frame includes a soft non-allergic nose pad for maximum comfort and fit
- Each safety glass comes complete with a convenient neck strap—no more misplaced or lost glasses!
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models 50000, 50001, 50002, 50004, 50006, 50010, 50040, 50041, 50042 are CSA certified to CAN/CSA Z94.3 standards
- Models 50000, 50002, 50004, 50005, 50006, 50008, 50009, 50010; 50040, 50041, 50042 **CE certified**
- Available in three styles—framed, framed polarized, and frameless



Extreme Flexibility and Strength for Maximum Durability and Life!

#### SAFETY GLASSES-PREMIUM SERIES

#### JACKSON® SG Series Safety Glasses-Framed

PRODUCT NO.	Frame Color	Lens Color	Lens Coating	Pack Qty.	Case Qty.
50000	Black	Clear	Hardcoat Anti-Scratch	12/Box	144
50001	Black	Clear	Anti-Fog	12/Box	144
50002	Black	Amber	Hardcoat Anti-Scratch	12/Box	144
50003	Black	Amber	Anti-Fog	12/Box	144
50004	Black	Indoor/Outdoor	Hardcoat Anti-Scratch	12/Box	144
50005	Black	Blue Shield	Hardcoat Anti-Scratch	12/Box	144
50006	Black	Smoke Mirror	Hardcoat Anti-Scratch	12/Box	144
50007	Black	Smoke Mirror	Anti-Fog	12/Box	144
50009	Black	Blue Mirror	Hardcoat Anti-Scratch	12/Box	144
50011	Blue	Light Blue	Hardcoat Anti-Scratch	12/Box	144
50012	Camo	Clear	Anti-Fog	12/Box	144
50013	Camo	Amber	Anti-Fog	12/Box	144
50014	Camo	Bronze	Hardcoat Anti-Scratch	12/Box	144
50015	Camo	Smoke	Hardcoat Anti-Scratch	12/Box	144
50016	Red	Smoke	Hardcoat Anti-Scratch	12/Box	144



NEW!









50010

#### JACKSON® SG INFRARED

- Safeguards workers from "welder's flash"
- For use with torch soldering, brazing and cutting

PRODUCT NO.	Frame Color	Lens Color	Lens Coating	Pack Qty.	Case Qty.
50008	Black	IR 3.0	Hardcoat Anti-Scratch	12/Box	144
50010	Black	IR 5.0	Hardcoat Anti-Scratch	12/Box	144

#### JACKSON® SG READERS

• Ideal for those who need reading glasses and impact protection at the same time

PRODUCT NO.	Frame Color	Lens Color	Lens Coating	Reader Strength	Pack Qty.	Case Qty.
50040	Black	Clear	Hardcoat Anti-Scratch	1.5	12/Box	144
50041	Black	Clear	Hardcoat Anti-Scratch	2.0	12/Box	144
50042	Black	Clear	Hardcoat Anti-Scratch	2.5	12/Box	144

#### JACKSON® SG+ Series Polarized Safety Glasses-Framed

• These glasses incorporate all of the same outstanding features of the **JACKSON® SG** Series but offer the added advantage of polarized lenses for ultimate viewing in bright conditions

PRODUCT NO.	Frame Color	Lens Color	Lens Coating	Pack Qty.	Case Qty.
50017	Brown	Brown	Hardcoat Anti-Scratch	12/Box	144
50018	Gunmetal	Smoke	Hardcoat Anti-Scratch	12/Box	144





50040

**EVE PROTECTION** 





#### JACKSON® SGf Series Safety Glasses-Frameless

• Includes the same outstanding features as the Jackson SG but made with a frameless design for lighter weight and edge-to-edge vison.

PRODUCT NO.	Frame Color	Lens Color	Lens Coating	Pack Qty.	Case Qty.
50025	Gunmetal	Clear	Hardcoat Anti-Scratch	12/Box	144
50026	Gunmetal	Clear	Anti-Fog	12/Box	144
50027	Gunmetal	Indoor/Outdoor	Hardcoat Anti-Scratch	12/Box	144
50028	Gunmetal	Smoke	Hardcoat Anti-Scratch	12/Box	144
50029	Gunmetal	Blue Mirror	Hardcoat Anti-Scratch	12/Box	144
50030	Gunmetal	IR 5.0	Hardcoat Anti-Scratch	12/Box	144
50031	Camo	Bronze	Hardcoat Anti-Scratch	12/Box	144



**EVE PROTECTION** 

### sellstrom.



protection in dusty, windy conditions

cell foam seals the glass to your face

### SAFETY GLASSES— PREMIUM SEALED



S71910

- Sealed safety glasses offer the best of both worlds-the comfort and fit of a safety glass with • goggle-like protection
- Features a fire-resistant closed cell foam insert that seals the glass to your face .
- Provide maximum protection in dusty, windy conditions and wherever airborne particles are present
- Foam insert features top and bottom vent ports allowing superior air circulation
- Curved, custom molded high-impact polycarbonate lenses provide exceptional panoramic views •
- Made with premium virgin polycarbonate high-impact lenses
- Lenses are specially coated with Sellstrom's premium Sta-Clear® anti-fog/anti-scratch washable lens treatment for maximum performance, durability, and life
- Virtually 100% fog free for optimum operator safety
- Provide 99.9% UV protection
- All models meet or exceed ANSI Z87.1+ high impact standards, CSA certified to CAN/CSA Z94.3 standards and model XPS502 is tested to the U.S. Military Standard MIL-PRF-31013 safety requirement of 640 feet per second



#### SAFETY GLASSES-PREMIUM SEALED

#### XPS502 Sealed Safety Glasses

- Features flexible, soft temples that are permanently attached to the frame using a heavy-duty ratcheting (up or down) temple adjustment hinge
- Allows the user to adjust temples for maximum comfort and protection
- Includes a cloth strap that conveniently attaches to the temples
- Detachable strap can be easily removed/re-attached as desired
- Ballistic Rated—meets US Military Standard MIL-PRF-31013 requirement
- 12/box, 144/case

PRODUCT NO.	Color	Tint	Lens Coating	Temple	Strap
\$71910	Black/Orange	Clear	Sta-Clear® Anti-Fog/Hard Coated	Soft	FR Cloth
\$71911	Black/Orange	Smoke	Sta-Clear® Anti-Fog/Hard Coated	Soft	FR Cloth
\$71912	Black/Orange	I/O	Hard Coated	Soft	FR Cloth

#### **XPS530 Sealed Safety Glasses**

- The XPS530 comes standard with both detachable soft co-molded temples and a fire resistant cloth strap which are easily interchangeable
- Outstanding style, fit, comfort, and safety
- 12/box, 144/case

PRODUCT NO.	Color	Tint	Lens Coating	Temple	Strap
\$70000	Yellow/Black	Clear	Sta-Clear® Anti-Fog/Hard Coated	Co-mold	FR Cloth
\$70001	Yellow/Black	Smoke	Sta-Clear® Anti-Fog/Hard Coated	Co-mold	FR Cloth
\$70002	Yellow/Black	I/O	Hard Coated	Co-mold	FR Cloth

XPS530 safety glasses include both detachable temple arms and straps.

sellstrom.



\*\*\*

BEST

Heavy duty ratcheting temple adjustment hinge (up or down)



S70000



S70001

Model \$70000 shown with fire-resistant rated strap (included).





### **SAFETY GLASSES**— PREMIUM SERIES

#### FOG FREE!

- Sellstrom offers a wide range of super premium, high quality safety glasses
- Rich in style, comfort, fit and safety
- Each model has been designed to exceed the needs of the most demanding user
- Made with premium virgin polycarbonate high impact lenses
- Lenses are specially coated with Sellstrom's premium Sta-Clear® anti-fog/anti-scratch washable lens treatment for maximum performance, durability and life
- Virtually 100% fog free for optimum operator safety
- Provide 99.9% UV protection
- All models meet or exceed ANSI Z87.1+ high impact standards, CSA certified to CAN/CSA Z94.3 standards and tested to the U.S. Military Standard MIL-PRF-31013 safety requirement of 640 feet per second

#### XP410 Safety Glasses

- The XP410 offers feather light frames, great style, maximum comfort & fit
- So light, you won't even remember you have them on!
- High-impact optically correct wrap style unitary PC lens offers superior coverage
- Stylish, ultra-thin black/green co-molded temples
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal
- Soft, co-molded above-the-eye band provides superior eye coverage
- Soft, co-molded nose piece with flexible fingers ensures maximum comfort

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty.	Case Qty.
\$72000	Black /Green	Clear	Sta-Clear® Anti-Fog/Hard Coated	12/Box	144
\$72001	Black /Green	Smoke	Sta-Clear® Anti-Fog/Hard Coated	12/Box	144
\$72002	Black /Green	I/O	Hard Coated	12/Box	144



S72000



S72001

#### SAFETY GLASSES-PREMIUM SERIES

#### XP420 Safety Glasses

- The XP420 offers a sporty, stylish heavy duty frame and temple design
- High-impact optically correct wrap style unitary PC lens offers superior coverage
- Soft, flexible temples with ribbed tips are curved inwards to ensure comfortable, slip-resistant fit
- Soft nose piece offers all day comfort

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty	Case Qty.
\$72100	Black	Clear	Sta-Clear® Anti-Fog/Hard Coated	12/Box	144
\$72101	Black	Smoke	Sta-Clear® Anti-Fog/Hard Coated	12/Box	144
\$72102	Black	I/O	Hard Coated	12/Box	144



\*\*\* BEST

S72101



- The XP450 is our sportiest looking safety glass
- Edgy, sleek and modern co-molded temples offer outstanding style and comfort
- High-impact optically correct wrap style two-piece PC lenses offer superior coverage
- Lenses are mounted to the frame with a ventilation space, minimizing fogging
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal
- Soft nose piece offers all day comfort

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty	Case Qty.
\$72300	Black/Red	Clear	Sta-Clear® Anti-Fog/Hard Coated	12/Box	144
\$72301	Black/Red	Smoke	Sta-Clear® Anti-Fog/Hard Coated	12/Box	144
\$72302	Black/Red	I/O	Hard Coated	12/Box	144











S72401

#### XP460 Safety Glasses

- The XP460 offers a sporty, stylish heavy duty frame and temple design
- Our only full frame premium safety glass
- High-impact optically correct two-piece PC lenses offer superior coverage
- Stylish black/green co-molded temples and soft nose piece offers all day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty	Case Qty.
\$72400	Black /Green	Clear	Sta-Clear® Anti-Fog/Hard Coated	12/Box	144
\$72401	Black /Green	Smoke	Sta-Clear® Anti-Fog/Hard Coated	12/Box	144
\$72402	Black /Green	I/O	Uncoated	12/Box	144

**EVE PROTECTION** 



S71100



S71101



S71200



S71201



S71203

#### SAFETY GLASSES—ADVANTAGE PLUS SERIES

- Advantage Plus safety glasses offer additional features over our Advantage Series products, providing the user with increased comfort and fit
- All glasses are made using virgin polycarbonate lenses
- Provide 99.9% UV protection
- Lenses feature an anti-scratch hard coating
- Ideal for those applications where safety, comfort, fit, and affordability are of primary importance

\*\*

BETTER

 All models meet or exceed ANSI Z87.1+ high impact standards, CSA certified to CAN/CSA Z94.3 standards and tested to the U.S. Military Standard MIL-PRF-31013 safety requirement of 640 feet per second (except XM300 Series)

#### XM300 Safety Glasses

- The XM300 safety glass is lightweight, stylish, comfortable and affordable
- High impact optically correct wrap style unitary PC lens offers superior coverage
- Stylish black/green co-molded temples and soft nose piece offers all day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty.	Case Qty.
S71100	Black/Green	Clear	Hard Coated	12/Box	144
\$71101	Black/Green	Smoke	Hard Coated	12/Box	144
\$71102	Black/Green	I/O	Hard Coated	12/Box	144

#### XM310 Safety Glasses

- The XM310 safety glass is lightweight, stylish, comfortable and very affordable
- High impact optically correct wrap style unitary PC lens offers superior coverage
- Molded above-the-eye band provides superior coverage
- Stylish black/orange co-molded temples and soft nose piece offers all day comfort
- Up/down three-position ratcheting temples allows user to adjust for maximum fit
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty.	Case Qty.
S71200	Black/Orange	Clear	Hard Coated	12/Box	144
\$71201	Black/Orange	Smoke	Hard Coated	12/Box	144
\$71202	Black/Orange	I/O	Hard Coated	12/Box	144
\$71203	Black/Orange	Amber	Hard Coated	12/Box	144

#### SAFETY GLASSES-ADVANTAGE PLUS SERIES

#### XM320 Safety Glasses

- The XM320 offers a sporty, stylish heavy duty frame and temple design
- High impact optically correct unitary PC lens offers integrated side panel incredible front and side eye coverage
- Stylish flat black and orange co-molded temples are soft and flexible
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Soft nose piece offers all day comfort

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty	Case Qty.
\$71400	Black/Orange	Clear	Hard Coated	12/Box	144
\$71401	Black/Orange	Smoke	Hard Coated	12/Box	144
\$71402	Black/Orange	I/O	Hard Coated	12/Box	144

#### XM330 Safety Glasses

- The XM330 safety glass is lightweight, stylish, comfortable and very affordable
- Our most popular mid-range safety glass!
- High impact optically correct wrap style unitary PC lens offers superior coverage
- Soft, flexible temple tips and soft nose piece offers all day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty	Case Qty.
\$73601	Clear/Black	Clear	Hard Coated	12/Box	144
\$73611	Amber/Black	Amber	Hard Coated	12/Box	144
\$73621	Smoke/Black	Smoke	Hard Coated	12/Box	144
\$73631	Clear/Black	I/O	Hard Coated	12/Box	144

#### XM340 Safety Glasses (Old PT9)

- The XM340 safety glass is lightweight, stylish & comfortable
- High impact optically correct wrap style dual PC lenses offer superior coverage
- Lenses are mounted to the frame with a ventilation space, minimizing fogging
- Soft rubberized temple tips and soft nose piece offers all day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty.	Case Qty.
\$74201	Smoke/Smoke	Clear	Hard Coated	12/Box	144
\$74241	Smoke/Smoke	I/O	Hard Coated	12/Box	144
\$74271	Smoke/Smoke	Smoke	Hard Coated	12/Box	144



\*\* BETTER





S73601













S74271







S70721



S73401





S73471



#### SAFETY GLASSES-ADVANTAGE SERIES

• Sellstrom offers a wide range of affordable safety glasses under the Advantage Series program



- Provide 99.9% UV protection
- Ideal for construction, shop, and general eye protection applications

#### X300 Safety Glasses

- The X300 style is one of the most popular selling safety glasses in North America
- Lightweight, comfortable and very affordable
- Lens features an anti-scratch hard coating
- All X300 safety glasses meet ANSI Z87.1+ high impact standards and are CSA certified to CAN/CSA Z94.3 standards

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty	Case Qty
S70701	Clear	Clear	Hard Coated	12/Box	144
\$70702	Clear	Clear	Anti-Fog	12/Box	144
S70711	Amber	Amber	Hard Coated	12/Box	144
S70721	Smoke	Smoke	Hard Coated	12/Box	144
S70731	Clear	I/O	Hard Coated	12/Box	144

#### X330 Safety Glasses (Old Firebird)

- The X330 style is one of the most popular selling safety glasses in North America
- Lightweight, comfortable and very affordable
- Lens features an anti-scratch hard coating
- Soft rubberized temple tips ensure superior comfort and fit
- All X300 safety glasses meet ANSI Z87.1+ high impact standards and are CSA certified to CAN/CSA Z94.3 standards

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty	Case Qty
S73401	Clear	Clear	Hard Coated	12/Box	144
\$73402	Clear	Clear	Anti-Fog	12/Box	144
\$73421	Amber	Amber	Hard Coated	12/Box	144
\$73471	Smoke	Smoke	Hard Coated	12/Box	144
S73481	Smoke	Blue Mirror	Hard Coated	12/Box	144

X350 Safety Glasses (OTG)

- Lightweight, comfortable and affordable
- Sleek, modern look offers front, side and above/below-the-eye protection
- Designed to fit over most medium sized prescription eyewear (OTG)
- Comfortable nose bridge
- Ideal as a visitors spec as well as for everyday eye protection
- Meets ANSI Z87.1+ high impact standards and are CSA certified to CAN/CSA Z94.3 standards
- Tested to U.S. Military Standard MIL-PRF-31013 safety requirement of 640 feet per second

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty	Case Qty
\$79100	Clear	Clear	Hard Coated	12/Box	144

SELLSTRON

\*

GOOD

#### SAFETY GLASSES—ADVANTAGE SERIES

#### Sebring<sup>™</sup> Safety Glasses

- Classic one-piece molded lens offers excellent front/side protection
- Lightweight, comfortable and very affordable
- Arms are extendable for maximum fit and comfort
- S73801 and S73802 offer same features but with a smaller frame for narrow faces
- Meets ANSI Z87.1+ high impact standards and the following are CSA certified to CAN/CSA Z94.3 standards: S73801, S76301, and S76371

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty	Case Qty
\$73801	Black (small frame)	Clear	Hard Coated	12/Box	144
\$73802	Blue (small frame)	Clear	Hard Coated	12/Box	144
\$76301	Black	Clear	Hard Coated	12/Box	144
\$76341	Black	Mirror	Hard Coated	12/Box	144
\$76361B	Black	Shade 6	Hard Coated	12/Box	144
\$76371	Black	Smoke	Hard Coated	12/Box	144
\$76701	Red, White, Blue	Clear	Hard Coated	12/Box	144
\$76771	Red, White, Blue	Smoke	Hard Coated	12/Box	144





\$76301



S76701

S79301

#### Maxview<sup>™</sup> Safety Glasses

- Lightweight, comfortable and affordable
- Designed to fit over prescription eyewear (OTG)
- Ideal as a visitors' spec as well as for everyday eye protection
- Extra-wide ventilated temples for increased side protection
- Meets ANSI Z87.1+ high impact standards and the following are CSA certified to CAN/CSA Z94.3 standards: S79301 and S79302

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Pack Qty	Case Qty
\$79301	Clear	Clear	Hard Coated	12/Box	144
\$79302	Clear	Clear	Uncoated	12/Box	144
\$79371	Smoke	Smoke	Hard Coated	12/Box	144
\$79372	Smoke	Smoke	Uncoated	12/Box	144

#### Guest-Gard<sup>™</sup> Safety Glasses

- Lightweight, comfortable and affordable
- Designed to fit over prescription eyewear (OTG)
- Ideal as a visitors' spec as well as for everyday eye protection
- Classic one-piece molded lens offers excellent front/side protection
- 79103 comes in convenient dispenser box 24/box
- 79108 is bulk packed in quantities of 100

**Temple Color** 

Clear

Clear

• Meets ANSI Z87.1+ high impact standards and are CSA certified to CAN/CSA Z94.3 standards

Lens Tint

Clear

Clear

Lens Coating

Uncoated

Uncoated

S79103

Case Qty

144

144

Pack Qty

24/Dispenser Box

100/Bulk Packed

ellet.rnn

Guest

N



\$79103

SELLSTROM



PRODUCT NO.

\$79103

\$79108

SELLSTRON



**Bifocal magnifiers** 



**Bifocal magnifiers** 





- Sellstrom offers two popular styles of bifocal magnifying safety glasses
- Developed for workers requiring magnifiers when performing close-vision tasks
- Available in three magnifying powers: 1.5, 2.0 & 2.5
- All glasses are made using virgin, unitary polycarbonate lenses
- Provide 99.9% UV protection
- Meets ANSI Z87.1+ high-impact standards

#### X300RX Safety Glasses

-

- The X300RX offers all of the same features as our popular X300 but with bifocal magnification technology
- Lightweight, comfortable, and very affordable
- Lens features an anti-scratch hard coating

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Magnification	Pack. Qty	Case Qty.
\$70703	Clear	Clear	Hard Coated	1.5x	12/Box	144
S70704	Clear	Clear	Hard Coated	2.0x	12/Box	144
S70705	Clear	Clear	Hard Coated	2.5x	12/Box	144

#### XM340RX Safety Glasses

- The XM340RX offers all of the same features as our popular XM340 but with bifocal magnification technology
- High-impact optically correct wrap style dual PC lenses offer superior coverage
- Lenses are mounted to the frame with a ventilation space, minimizing fogging
- Soft rubberized temple tips and soft nose piece offers all-day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

PRODUCT NO.	Temple Color	Lens Tint	Lens Coating	Magnification	Pack. Qty	Case Qty.
\$74202	Smoke/Black	Clear	Hard Coated	1.5x	12/Box	144
\$74203	Smoke/Black	Clear	Hard Coated	2.0x	12/Box	144
\$74204	Smoke/Black	Clear	Hard Coated	2.5x	12/Box	144



\$79901



\$79904

#### SAFETY GLASSES-ACCESSORIES

PRODUCT NO.	Description
\$79901	Black Padded Hard Case with Belt Clip Attachment
S79904	Black Sellstrom Safeguards Microfiber Bag

#### SAFETY GLASSES-SHADE 3 AND 5 IR

- Sellstrom offers three styles of safety glasses specifically for use in welding and fabrications shops
- B5 model is also available with clear lens
- Available in Shade 3 and Shade 5 IR for soldering, brazing and cutting operations
- All glasses are made with anti-scratch polycarbonate lenses
- Provide 99.9% UV protection

#### B5<sup>™</sup> Safety Glasses

- Features fold-out contouring side shields for maximum eye protection
- Arms are extendable for maximum fit and comfort
- Dual polycarbonate lenses are available in clear and Shade 5 IR
- Meets or exceeds ANSI Z87.1+ high impact standards
- Model S74751 is **CE certified**

PRODUCT NO.	Temple Color	Side Shield	Lens Tint	Lens Coating	Pack Qty	Case Qty.
\$74701	Black	Clear	Clear	Hard Coated	12/Box	144
\$74751	Black	Black	Shade 5 IR	Hard Coated	12/Box	144

#### X35<sup>™</sup> Safety Glasses

- Temple arms molded with side shields for maximum eye protection
- Features unique spring-loaded flip window
- It's easy and safe—by keeping the glasses on at all times, the operator can flip the shaded lenses up or down, providing uninterrupted eye protection during cutting and grinding operations
- Clear lens provides eye protection when the flip plate is in the up position
- Flip windows available in two Shades: 3 IR and 5 IR
- Meets or exceeds ANSI Z87.1+ high impact standards
- CE certified

PRODUCT NO.	Color	Fixed Lens	Flip Lens Tint	Lens Coating	Pack Qty	Case Qty.
\$72903	Black	Clear	Shade 3 IR	Hard Coated	12/Box	144
\$72905	Black	Clear	Shade 5 IR	Hard Coated	12/Box	144





S74701



Fold-out contouring side shield





www.surewerx.com/us




### **EYE PROTECTION** GOGGLES



www.surewerx.com/us



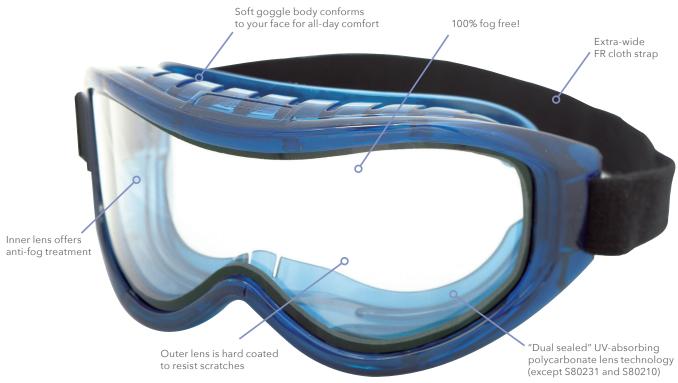

S80200

### **GOGGLES**—PREMIUM





S80200

#### **Odyssey II Safety Goggle Series**

- The Odyssey II premium goggle series has been a market leader for 20 years
- Unique "dual sealed" UV absorbing polycarbonate lens technology (except single lens clean room and Shade 5 cutting models)
- Dual lens models offer anti-fog treatment on inside lens, anti-scratch on outside lens
- Industrial, chemical splash, and Shade 5 models feature top and bottom indirect vents, providing superior ventilation and the safest operator conditions
- 100% fog free, even in the worst conditions
- Stylish soft goggle body conforms to your face, providing a comfortable yet snug seal and maximum protection against liquids and dust
- Exceptional panoramic views
- Specially designed to fit over prescription eyewear
- Simply the best goggle in the market
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S80200, S80201, S80202, S80203, S80210, S80211, S80231 CSA certified to CAN/CSA Z94.3 standards

#### **GOGGLES-PREMIUM**

#### **Odyssey II Series Industrial Dual Lens Model**

- Our most popular Odyssey II model
- Ideal for a wide variety of applications including construction sites, shop use, and general industrial work-place protection
- Complete with extra-wide flame retardant cloth strap (S80246)

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Tint	Case Qty.
\$80200	Blue	Indirect	Dual	Hard Coated/Anti-Fog	Clear	100

#### **Odyssey II Series Chemical Splash Dual Lens Goggle**

- Specifically designed for those applications where the risk of a chemical splash exists
- Available in three lens tints: clear, smoke and amber
- Complete with extra-wide grey, latex free neoprene strap

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Tint	Case Qty.
S80201	Blue	Indirect	Dual	Hard Coated/Anti-Fog	Clear	100
\$80202	Blue	Indirect	Dual	Hard Coated/Anti-Fog	Amber	100
\$80203	Blue	Indirect	Dual	Hard Coated/Anti-Fog	Smoke	100

#### **Odyssey II Series Tactical Dual Lens Goggle**

- Specifically designed with high temperature vented body for police, prisons and military tactical applications
- Features a closed cell foam face seal design
- Complete with extra wide flame retardant strap

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Tint	Case Qty.
\$80290	Black (high temp)	Sealed	Dual	Hard Coated/Anti-Fog	Clear	100

#### **Odyssey II Series Clean Room Goggle**

- Specifically designed for clean room applications
- Unlike traditional single use clean room goggles, these premium goggles are re-usable and designed for multi-use clean room applications
- Can be autoclaved
- Top-vented body with clear uncoated lens
- CE certified
- Complete with extra-wide grey, latex free neoprene strap (S80251)

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Tint	Case Qty.
S80231	Blue	Top-Vented	Single	Uncoated	Clear	100

### **INCREDIBLE COMFORT & FIT!**





\*\*\* BEST

S80200



S80201



\$80202



\$80203



\$80290



S80231

EVE PROTECTION



\$80210



S80245




\$79905

#### **GOGGLES-PREMIUM**

#### Odyssey II Series Shade 5 Cutting Goggle

• Features a durable Shade 5 IR (single) lens



• Complete with extra wide flame retardant strap (80246)

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Tint	Case Qty.
\$80210	Black (High Temp)	Indirect	Single	Uncoated	Shade 5 IR**	100
\$80211	Black (High Temp)	Indirect	Single	Uncoated	Shade 5 IR*	100

\*\*\*

BEST

\*Packed in POS clamshell \*\*Packed in convenient polybag

#### Black Nylon Goggle Case c/w Belt Loop

PRODUCT NO.	Description	Fits Goggle Models
\$80245	Black Padded Nylon Goggle Case	All Odyssey Goggles


#### Microfiber Bags for Odyssey II Goggles

PRODUCT NO.	Description	Fits Goggle Models
\$79905	Black Microfiber Bag	All Odyssey II Goggles
\$79906	Black Microfiber Bag	Wildland Fire Goggles



SELLSTROM



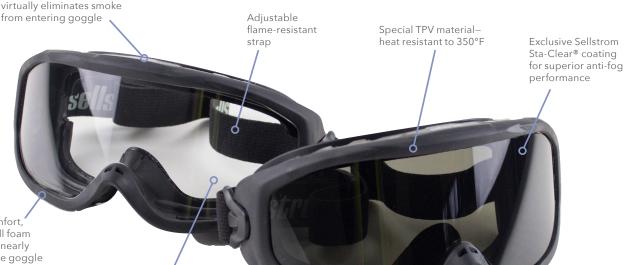

Super comfort, closed-cell foam delivers a nearly smoke-free goggle

Non-vented design

Outstanding optical clarity



Designed to fit over most prescription eyewear

NEW! VIRTUALLY SMOKE-FREE PERFORMANCE!

> \*\*\* BEST

### **GOGGLES**— PREMIUM WILDLAND FIREFIGHTING

#### **Odyssey II Wildland Firefighting Goggles**

- Specially designed for use in wildland firefighting applications
- TPV material construction is heat resistant to  $350^\circ\mathrm{F}$
- Non-vented style virtually eliminates smoke from entering goggle
- Closed-cell foam design offers a soft but firm seal and contributes to a smoke-free goggle
- Unique Sta-Clear® coating provides superior anti-fog performance
- Adjustable flame-resistant band for a custom fit
- Outstanding optical clarity and fits over prescription eyewear
- Meets ANSI Z87.1+ high impact standards

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Tint	Case Qty.
\$80225	Black	Sealed	Single	Sta-Clear® Anti-Fog	Clear	144
\$80226	Black	Sealed	Single	Sta-Clear® Anti-Fog	Smoke	144









**EVE PROTECTION** 



JACKSON SAFETY

**EVE/FACE PROTECTION** 



#21001 1 Shade 3 IR #21002 1 Shade 5 IR

### **GOGGLES**— PREMIUM SPECIALTY





- Jackson introduces a new premium goggle with detachable flip-up/flip-down face shield
- Stylish super-soft goggle body conforms to your face, ensuring a comfortable snug seal and maximum protection against liquids and dust
- Indirect vents along with an anti-fog lens coating ensures a safe, fog-free working environment while offering superior protection against dust and chemical splashes
- Optically correct polycarbonate lens provide exceptional panoramic views
- Specially designed to fit over prescription eyewear
- Face shield is easily detachable

#### **GOGGLES-PREMIUM SPECIALTY**

#### GPL500 Series Premium Safety Goggle with Detachable Flip-Up/Flip-Down Face Shield

- The GPL500 features an added flip-up/flip-down polycarbonate face shield designed to protect your face from splash, dust, and flying debris
- Extra-wide flame retardant strap is swivel mounted to goggle
- Provides 99.9% UV protection
- Available in three tints: Clear, IRUV 3, and IRUV 5
- Clear version is ideal for industrial, mining, cutting, grinding, construction, woodworking, machine shop, and pressure washing applications
- Shade 3 IR goggle is coated to provide IR protection for oxy/acetylene cutting and light brazing applications
- Shade 5 IR goggle is coated to provide IR protection for oxy/acetylene cutting, brazing, and plasma cutting applications
- Meets ANSI Z87.1+ high impact standards
- Models 21000, 21002 CSA certified to CAN/CSA Z94.3 standards
- 21000, 21001, 21002 CE certified

PRODUCT NO.	MOD. NO.	Body Color	Face Shield Color	Lens	Coatings	Tint	Case Qty.
21000	GPL500	Blue	Blue	Single	Anti-Fog	Clear	6
21001	GPL530	Black	Green	Single	Anti-Fog	Shade 3 IR	6
21002	GPL550	Black	Green	Single	Anti-Fog	Shade 5 IR	6

#### **GOGGLES**—ADVANTAGE PLUS SERIES

#### GM500 Safety Goggle

- The GM500 goggle combines comfort, fit, safety, and great looks in one product
- Stylish orange/black co-molded soft TPR body provides comfort and fit
- Molded curved polycarbonate lens provides outstanding panoramic views with virtually no distortion
- Top and bottom indirect vents along with an anti-fog lens coating provides superior ventilation
- and a safe, fog-free working environment
- Indirect vents provide superior protection against dust and chemical splashes
- Swivel mounted, extra-wide flame retardant strap
- Specially designed to fit over prescription eyewear
- Provides 99.9% UV protection
- Meets ANSI Z87.1+ high impact standards and CSA certified to CAN/CSA Z94.3 standards

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Tint	Case Qty.
\$82500	Orange/Black	Indirect	Single	Anti-Fog	Clear	200

#### GM200 Safety Goggle

- The GM200 goggle combines comfort, fit, safety, and great looks in one product
- Super-soft smoke colored body is designed with extra-wide face seal lip for exceptional comfort and fit
- Molded optically correct polycarbonate lens provides panoramic views with little distortion
- Top and bottom indirect vents along with an anti-fog lens coating provides superior ventilation and a safe, fog-free working environment
- Indirect vents provide superior protection against dust and chemical splashes
- Extra-wide flame retardant strap
- Provides 99.9% UV protection
- All these features at an economical price—ideal for use in schools
- Meets ANSI Z87.1+ high impact standard

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Tint	Case Qty.
\$82000	Smoke	Indirect	Single	Anti-Fog	Clear	200



**EVE PROTECTION** 



\*\*\*

BEST

NEW!

\*\* BETTER

\*\* BETTER 21000



21001 21002





S82500



\$82000

SELLSTROM

#### **GOGGLES-ADVANTAGE SERIES (USA MADE)**

#### 880, 881, and 882 Series Safety Goggles

- Proudly made in the USA
- Green tinted flexible PVC body ensures proper fit
- Polycarbonate UV-absorbing clear lenses
- Three vent options available to fit your every need
- Adjustable 18" green flame-retardant headband (S22448)
- Available with anti-fog lens coating
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S88200, S88210 CSA certified to CAN/CSA Z94.3 standards

#### 880 Direct Vent Safety Goggles

- Direct vent series
- Provides maximum air flow and protection against flying debris

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
S88000	Green	Direct	Clear	Uncoated	1/Bag	36
<b>S88003</b>	Green	Direct	Clear	Uncoated	150 Bulk Nested	150
S88010	Green	Direct	Clear	Anti-Fog	1/Bag	36

#### 881 Non-Vented Safety Goggles

- Non-vented series
- Offers best protection from liquids and dust particles

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
\$88110	Green	Non-Vent	Clear	Anti-Fog	1/Bag	36

#### 882 Indirect Vent Chemical Splash Safety Goggles

- Indirect vent chemical splash series
- Protects against liquid, dust, smoke, and chemical splash environments

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
S88200	Green	Indirect	Clear	Uncoated	1/Bag	36
S88210	Green	Indirect	Clear	Anti-Fog	1/Bag	36





S88110



\$88200



\*

64

**EVE PROTECTION** 

\$88000

#### **GOGGLES-ADVANTAGE SERIES**

#### 810 and 812 Series Safety Goggles

- Our most economically priced goggle series
- Clear flexible PVC body ensures proper fit
- Polycarbonate UV-absorbing clear lenses
- Three vent options available to fit your every need
- Adjustable 18" black flame-retardant headband (S22448)
- Available with anti-fog lens coating
- 813 series come with padded face seal
- 830 and 832 series are mini versions for children, students, and small faces
- Meets ANSI Z87.1+ high-impact standards

#### 810 Direct Vent Safety Goggles

- Direct vent series
- Provides maximum air flow and protection against flying debris
- Models S81000 and S81010 CSA certified

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
\$81000	Clear	Direct	Clear	Uncoated	1/Bag	200
\$81010	Clear	Direct	Clear	Anti-Fog	1/Bag	200

#### 812 Indirect Vent Chemical Splash Safety Goggles

- Indirect vent chemical splash series
- Protects against liquid, dust, smoke, and chemical splash environments
- Model S81210 CSA certified

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
\$81200	Clear	Indirect	Clear	Uncoated	1/Bag	160
\$81210	Clear	Indirect	Clear	Anti-Fog	1/Bag	160
S81210E	Clear	Indirect	Clear	Anti-Fog	1/Bag	144 <b>NEW!</b>

#### 812 Non-Vented Safety Goggles

- Non-vented goggle
- Offers best protection from liquids and dust particles
- Model S81220 is CSA certified

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
\$81220	Clear	Non-Vent	Clear	Anti-Fog	1/Bag	200
S81220X	Green	Non-Vent	Clear	Anti-Fog	1/Bag	200 NEW!





\* GOOD



S81200







**EVE PROTECTION** 



S81310



\$81320



\$81330



\$83000



\$83200

#### **GOGGLES-ADVANTAGE SERIES**

#### 813 Direct Vent Safety Goggles (Padded)

- Direct vent series
- Provides maximum air flow and protection against flying debris
- Features padded face seal for maximum safety

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
\$81310	Clear	Direct	Clear	Anti-Fog	1/Bag	200

\* GOOD

#### 813 Indirect Vent Chemical Splash Safety Goggle (Padded)

- Indirect vent chemical splash model
- Protects against liquid, dust, smoke, and chemical splash environments
- Features padded face seal for maximum safety

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
\$81320	Clear	Indirect	Clear	Anti-Fog	1/Bag	200

#### 813 Non-Vented Safety Goggles (Padded)

- Non-vented goggle
- Offers best protection from liquids and dust particles
- Features padded face seal for maximum safety

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
\$81330	Clear	Non-Vent	Clear	Anti-Fog	1/Bag	200

#### 830 Direct Vent "Mini" Safety Goggles

- Direct vent series
- Provides maximum air flow and protection against flying debris
- Mini version for children, students, and small faces

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
\$83000	Green	Direct	Clear	Uncoated	1/Bag	200
\$83010	Green	Direct	Clear	Anti-Fog	1/Bag	200

#### 832 Indirect Vent "Mini" Chemical Splash Safety Goggles

- Indirect vent chemical splash series
- Protects against liquid, dust, smoke, and chemical splash environments
- Mini version for children, students, and small faces

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Packaged	Case Qty.
\$83200	Green	Indirect	Clear	Uncoated	1/Bag	100
\$83210	Green	Indirect	Clear	Anti-Fog	1/Bag	200



#### **GOGGLES-WELDING**

#### Odyssey II Series Shade 5 Cutting Goggle

- Sellstrom carries one of the widest ranges of welding goggles in the industry
- All goggles feature soft, flexible green PVC bodies for excellent comfort and fit
- Top and bottom indirect vents provide superior ventilation and a safe, fog-free working environment (except S85150 eye cup goggle)
- Indirect vents provide superior protection against dust and chemical splashes
- Meets ANSI Z87.1+ high impact standards
- Models S80210, S85150, S85250, S85550 CSA certified to CAN/CSA Z94.3 standards

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Tint	Case Qty.
\$80210	Black (high temp)	Indirect	Single	Uncoated	Shade 5 IR**	100

#### **Plate Goggle**

- Features standard size 2" x 4-1/4" Shade 5 IR fixed plate window
- Window includes filter, cover, and impact

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Case Qty.
\$85450	Green	Indirect	Shade 5 IR	Uncoated	120

#### Lift Front Plate Goggle

- Features standard size 2" x 4-1/4" lift front plate window
- It's easy and safe—by keeping the welding goggle on at all times, the operator can flip the shaded window up or down, providing uninterrupted eye protection during cutting and grinding operations
- Clear lens provides eye protection when the flip plate is in the up position
- Flip windows available in two shades: 5 IR and Shade 6 Cobalt Blue
- Window includes filter, cover, and impact plates

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Case Qty.
\$85550	Green	Indirect	Shade 5 IR	Uncoated	100
S85560B	Green	Indirect	Shade 6 Cobalt Blue	Uncoated	100

#### Lens Cover Goggle

• Features 50mm eye-cup style fixed plate windows with soft PVC body

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Case Qty.
\$85250	Green	Indirect	Shade 5 IR	Uncoated	100

#### Lift Front Lens Cover Goggle

- Features 50mm eye-cup style lift front eye-cup windows with soft PVC body
- It's easy and safe—by keeping the welding goggle on at all times, the operator can easily flip the shaded windows up or down as required providing uninterrupted eye protection during cutting and grinding operations
- Clear lenses provide eye protection when the flip plate is in the up position

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Case Qty.
\$85350	Green	Indirect	Shade 5 IR	Uncoated	100

#### Eye Cup Goggle

- Our most basic welding type goggle
- Features 50mm eye-cup lenses and two individual cup bodies
- Ideal for confined space

PRODUCT NO.	Body Color	Vent Type	Lens	Coatings	Case Qty.
S85110	Green	Non-Vent	Clear	Uncoated	100
\$85150	Green	Non-Vent	Shade 5 IR	Uncoated	100

### sellstrom.



\*\*\* BEST

\*\* Better

\*\* BETTER

\*\* BETTER

\* GOOD

\* GOOD S80210



S85450



S85550



S85250



S85350




S85150

**EVE PROTECTION** 

#### **GERMICIDAL CABINETS**

SELLSTRON

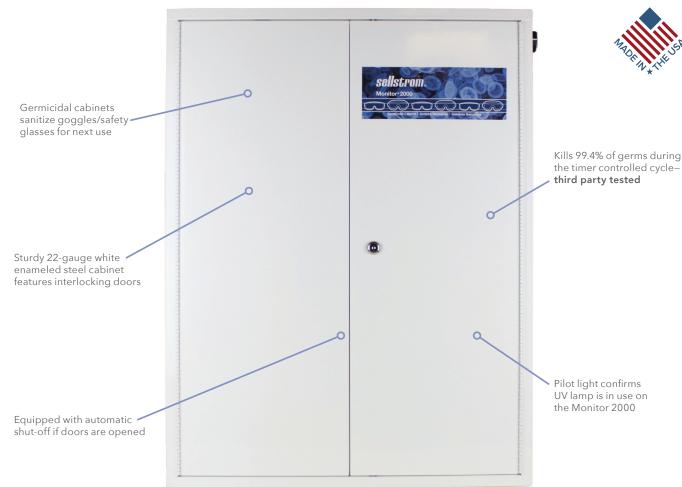

S90494

### **GERMICIDAL CABINETS**



S90494

#### Monitor<sup>®</sup> Germicidal Cabinets

- Made in the USA—Sellstrom's Monitor Series Germicidal Cabinet has been the industry leader for decades
- Germicidal cabinets sanitize goggles/safety glasses for next use
- Kills 99.4% of germs during the timer controlled cycle in five minutes—third party tested
- Sanitizes eyewear surfaces from germs, bacteria, mold, and fungus contaminants
- Sturdy 22-gauge white enameled steel cabinet features interlocking doors
- Features tamper-resistant latches with two keys provided
- Multiple units are keyed alike
- Zero UV radiation escapes during use
- Equipped with automatic shut-off if doors are opened
- Pilot light confirms UV lamp is in use on the Monitor 2000
- Wall or shelf mountable and includes 7' (2.13m) grounded cord
- For indoor use only; temperature range 32° to 104° Fahrenheit

#### **GERMICIDAL CABINETS**

#### Monitor<sup>®</sup> 2000 Germicidal Cabinet

- The Monitor 2000 has been the top selling germicidal cabinet for decades
- Specially designed for educational and medical industry applications
- Larger 32"H x 24.5"W x 9.5"D format includes eight shelves total
- Each shelf holds approximately five goggles or six safety glasses
- Sanitizes goggles/safety glasses for next use in just five minutes, an industry best
- Underwriters Laboratory listed and CUL certified

PRODUCT NO.	Description	Use	Case Qty.
S90494	Monitor 2000 Germicidal Cabinet	Education/Medical Industries	1



\* \* \* BEST

sellstrom

S90494

#### Monitor<sup>®</sup> Germicidal Cabinet Replacement Parts

PRODUCT NO.	Description	Fits
\$90479	Keys for Monitor Cabinets (Set of Two)	Monitor 2000
\$90482	Lamp	Monitor 2000
\$90484	Interlock Switch	Monitor 2000
\$90486	Timer Knob and Faceplate	Monitor 2000
\$90488	Locking Rod Assembly (Lock and Two Keys)	Monitor 2000
\$90496	Universal Rack (One Rack)	Monitor 2000





#### Optional Magnetic Hooks for Hanging Face Shields in Monitor Cabinet-NEW!

- Allows use of Monitor 2000 germicidal cabinet to sanitize face shields instead of glasses and goggles
- Set of four magnetic hooks allows sanitization of up to four face shields during the five-minute cycle time
- It's easy—simply remove the glasses and goggle rack from the Monitor 2000
- Space the four magnetic hooks in a pattern that allows up to four face shields to fit inside the cabinet
- Four magnetic brackets are designed to mount on the metal back wall of the cabinet
- Hang the face shields, close the door, set the timer, and after five minutes, away you go! • Option expands the range of products that can be sanitized to include safety glasses, goggles, and now face shields
- The following Jackson and Sellstrom face shields have been tested and certified with the Monitor 2000 cabinet, effectively killing 99.4+% of germs:
  - Jackson Quad 500, Maxview, F4XP, MFS320, 14955, 14957
  - Sellstrom 301, 303, 380, 390, and DP4 Series

PRODUCT NO.	Description	Pack Qty.
\$90495	Magnetic Face Shield Mounting Hooks	4







69

SELLSTROM



S23490 Box & Packets



S23480 Box & Tissues



S23469



S23470

#### **STA-CLEAR™ LENS CLEANING PRODUCTS**

- Cleans glass and polycarbonate safety glasses and goggle lenses
- Anti-static, anti-fog cleaning solution impregnated in tissues
- Scratch free—contains no silica
- Cleans without streaking or leaving static residue
- Not for fog-free (anti-fog coated) lenses

#### Sta-Clear™ Pre-Moistened Lens Cleaning Tissue Packets

- Convenient pre-moistened single use packets
- Towelette measures 5" x 8" (12.7 x 20.32cm)
- Convenient dispenser box contains 110 packets
- Can be wall mounted or placed on flat surface

PRODUCT NO.	Description	Packets/Box	Case Qty.
S23490	Pre-Moistened Non-Alcohol Based Towelettes	110	10/Box

#### Sta-Clear<sup>™</sup> Lens Cleaning Tissues

- Tissues come dry and must be water activated
- Tissues measure 4.5" x 10.5" (11.43 x 27.31cm)
- Box measures 5.25" x 4.5" x 4" (13.02 x 12.07 x 11.75cm)
- Convenient dispenser box contains 1,000 tissues

PRODUCT NO.	Description	Tissues/Box	Case Qty.
\$23480	Water Activated Lens Cleaning Tissue Box	1000	36/Box

#### Sta-Clear<sup>™</sup> Lens Cleaning Stations

- Stations come with water activated tissues and 16 oz. pump spray bottle
- Tissues come dry and must be water activated
- Tissue measures 4.5" x 10.5" (11.43 x 27.31cm)
- Two variations available:
  - Cardboard station: Measures 8.625" x 6.5" x 5.375"
  - Metal station: Measures 8.75" x 6.5" x 5.25"
  - Metal station can be locked (uses key #23475)
- Opening allows for litter free disposal of used tissues
- Can be wall mounted or placed on flat surface

PRODUCT NO.	Description	Pack Qty.
\$23469	Cardboard Station (1000 Tissues and Spray Bottle)	6/Box
S23470	Metal Station (1000 Tissues and Spray Bottle)	1/Box

### **EQUIPMENT CLEANING PRODUCTS**

### Sel-Kleen<sup>™</sup> Pre-Moistened Equipment Cleaning Packets

- Anti-static, anti-fog cleaning solution impregnated in tissues
- Scratch free—contains no silica
- Alcohol-free pads use active ingredient benzalkonium chloride and will not harm even the most sensitive rubber or PVC material
- Convenient single use packets

- Towelette measures 5" x 8" (12.7 x 20.32cm)
- Convenient dispenser box contains 110 packets
- Can be wall mounted or placed on flat surface

PRODUCT NO.	Description	Packets/Box	Case Qty.
S22185	Pre-Moistened Non-Alcohol Based Towelettes	110	10/Box





S22185 Box & Pack SELLSTROM



### sellstrom

Water flow is activated by pulling down yellow tray



S90320 16-Gallon Portable Eyewash Station

### **EMERGENCY EYEWASH**

- The proper selection of emergency eyewash stations is critical when operating a safe working environment
- OSHA regulations listed in 29 CFR outline where and when eyewash equipment must be installed
- ANSI Z358.1 (Emergency Eyewash and Shower Equipment) is the standard that outlines the proper design, performance, and installation of emergency equipment to comply with the OSHA standard
- Sellstrom offers a wide range of emergency eyewash solutions, all of which are designed to meet the ANSI standards

### EYEWASH STATIONS—PORTABLE EMERGENCY

### Gravit-Eye 6-Gallon Portable (Personal) Gravity Feed Eyewash Station

- Six-gallon, gravity-flow personal portable eyewash station
- Ideal as a portable, first response eyewash solution
- Water stream is activated by removing the water retaining strap ٠
- Water is fed through dual spray heads for maximum effectiveness
- 3' drain hose directs waste water into floor drain or storage tank
- Furnished with epoxy coated steel wall mounting bracket
- Can also be placed on flat surfaces such as counter tops
- Comes with 8 oz. bottle of bacteriostatic additive (S90322), which protects against growth of ٠ bacteria, fungus, algae and acanthamoeba
- Weight: 9.5 lbs. empty
- Complies with ANSI Z358.1 for portable personal eyewash stations

PRODUCT NO.	Description	Case Qty.
\$90306	6-Gallon Gravit-Eye Portable Personal Eyewash Station	1



\$90306

### **EYEWASH STATIONS—PORTABLE EMERGENCY**

### Gravit-Eye 16-Gallon Portable Gravity Feed Eyewash Station

- 16-gallon, self-contained gravity-flow portable eyewash station
- Water is fed through dual spray heads for maximum effectiveness
- Delivers over 14 gallons (53 litres) of water over a 15-minute period
- High-viz green body is easily located in case of emergency
- Heavy wall construction with reinforced ribs ensures strength and durability
- Water flow is activated by pulling up (on) or down (off) on bright yellow tray
- Integrated full flow nozzle delivers gentle spray of water
- Waste water is directed through drain opening in tank basin
- 3' drain hose directs waste water into floor drain or storage tank
- Furnished with steel wall mounting bracket
- Can also be placed on flat surfaces such as counter tops
- Comes with 8 oz. bottle of bacteriostatic additive (S90322) which protects against growth of bacteria, fungus, algae and acanthamoeba
- Weight: 13 lbs. empty, 146 lbs. full
- Unit comes completely assembled
- Complies with ANSI Z358.1 for portable eyewash stations

PRODUCT NO.	Description	Case Qty.
\$90320	16-Gallon Gravit-Eye Portable Eyewash Station	1
PRODUCT NO.	Description	Fits
\$90335	Dust Cover	S90320 16-Gallon Eyewash Station
\$90321	3' Replacement Drain Hose	S90320 16-Gallon Eyewash Station
\$90324	Replacement Mounting Bracket	S90320 16-Gallon Eyewash Station
\$90325	Replacement Dispenser Cap	S90320 16-Gallon Eyewash Station
\$90326	Replacement Manifold Assembly	S90320 16-Gallon Eyewash Station
\$90336	Replacement Threaded Cap	S90320 16-Gallon Eyewash Station

### 15-Gallon Portable Pressurized Eyewash/Drench Hose Unit

- 15-gallon pressurized tank portable eyewash station
- Stainless steel tank comes with carrying handles, air intake fitting, pressure gauge and pressure relief valve
- Provides approximately 10 gallons (34 liters) of usable capacity
- Two gentle spray heads with flip top dust cover, internal flow control and filter
- Pressure regulator restricts flow to 0.65 GPM (approx. 15 minutes of flow)
- 1/2" IPS chrome plated brass stay-open ball valve with flag handle
- Drench hose contains a single gentle spray head with flip top dust cover, chrome plated brass squeeze valve, 6' reinforced PVC hose and stainless steel lever handle
- Weight: 35.6 lbs. empty, 119 lbs. full
- Unit comes completely assembled
- Complies with ANSI Z358.1 for portable eyewash stations

PRODUCT NO.	Description	Case Qty.
\$90315	15-Gallon Portable Pressurized Eyewash/Drench Hose Unit	1

### Eyewash Bacteriostatic Additive-8 oz.

- 8 oz. bottle of bacteriostatic additive
- For use in all makes of portable eyewash stations
- Protects against growth of bacteria, fungus, algae and acanthamoeba

PRODUCT NO.	Description	Case/Qty.
\$90322	8 oz. Bottle of Bacteriostatic Formula	4/Case

### sellstrom.



S90320



S90335 Dust Cover Option



S90315



\$90322

EMERGENCY EYEWASH

### sellstrom.



S90331



\$90333



\$90330/\$90329

### **EYEWASH STATIONS-PORTABLE BOTTLES**

### **Rapid-Clear Portable Eyewash Bottle Stations**

- Personal eyewash bottle stations are extremely portable and handy
- Quickly flushes contaminants from eyes using a sterile, buffered and preserved saline solution
- The ideal first response solution when continuous water supply is not available
- Single or dual bottle stations available
- Date coded for easy inspection
- Tamper-evident seal with an easy-to-open twist off cap
- Highly visible green plastic backboard can be wall mounted or placed on flat surface
- FDA approved

PRODUCT NO.	Bottle Size	Туре	Description	Case Qty.
\$90331	16 oz.	Single	Rapid-Clear Eyewash Bottle Station	4/Case
\$90332	32 oz.	Single	Rapid-Clear Eyewash Bottle Station	4/Case
\$90333	32 oz.	Double	Rapid-Clear Eyewash Bottle Station	4/Case

### **Rapid Clear Replacement Eyewash Bottle Parts**

- Replacement bottles with sterile saline solution
- Date coded for easy inspection
- Tamper-evident seal with an easy-to-open twist off cap
- FDA approved

PRODUCT NO.	Bottle Size	Description	Case Qty.
\$90329	16 oz.	Rapid-Clear Replacement Eyewash Bottle	12/Case
\$90330	32 oz.	Rapid-Clear Replacement Eyewash Bottle	12/Case



## **HEARING PROTECTION**

sellstrom





JACKSON



20774



67212



67220



S23410



S23403

### **HEARING PROTECTION**

### What You Should Know About Hearing Protection!

- Exposure to continuous high noise levels causes irreversible hearing loss
- Developing an effective workplace hearing safety program is critical
- OSHA sets the permissible eight-hour work day noise exposure level at 90 dBA and only ٠ two hours of exposure to 100 dBA
- Many companies place noise level limits even lower than the OSHA standard
- Here are guidelines that some companies apply for increased safety
  - 8 hours exposure = 85 dBA
  - 4 hours exposure = 88 dBA
  - 2 hours exposure = 91 dBA
  - 1 hour exposure = 94 dBA

### About NRR Ratings and Their Practical Application in the Field

- The NRR ratings found on many hearing protection products in the market, including Jackson and Sellstrom, have been tested and certified in controlled laboratories
- However, working environments are seldom controlled environments
- In the field, hearing protection is not always fitted properly, leading to noise creep and the . potential for hearing damage
- As a precaution, NIOSH recommends the following deratings during field use: Ear Muffs—NIOSH recommends derating NRR ratings by 25%
  - Earplugs—NIOSH recommends derating NRR ratings by 50–75%
- In some applications, to achieve maximum protection, the use of earplugs and muffs together may be the safest solution. It is estimated that by combining the two, an extra 5 dBs can be added to the overall tested NRR rating


### What Level of Protection Do You Need?

All hearing protectors sold by Jackson Safety and Sellstrom are tested to the American National Standards Institute (ANSI) S3.19-1974 Standard to receive a Noise Reduction Rating (NRR), which is labeled on all such products as required by the U.S. Environmental Protection Agency (EPA).

This number gives the consumer a method to judge performance among different models of hearing protectors-a higher NRR indicating more effective protection against sound. Some models of hearing protectors have multiple NRR numbers. This reflects the fact that these hearing protectors may be worn with their headbands in different positions.

### Hearing Loss is Forever—Take Prevention Seriously!

Hearing protection should be taken very seriously and protectors, either muffs or plugs, should be comfortable to wear and offer sufficient attenuation to prevent hearing loss based on individual protection needed.



HEARING PROTECTION

### EARPLUGS-PREMIUM DISPOSABLE

### Disposable Earplugs-Bullet Shape

- Contoured bullet shape premium quality polyurethane earplugs
- Gently but quickly expands to fit ear canal—one size fits all!
- Soft, non-irritating PU foam for maximum comfort
- Available corded and uncorded
- Plugs are individually packed in pairs and sold:
  - Uncorded = 200 pairs in convenient dispenser box
  - Uncorded = 500 pairs in bulk bag (replacement plugs for dispenser)
  - Uncorded = 500 pairs in convenient see-through wall dispenser
  - Uncorded = 10 pairs in retail slide blister package
  - Corded = 100 pairs in convenient dispenser box
- CSA Class AL

PRODUCT NO.	Туре	Shape	Color	NRR	Package	Case Qty.
\$23410	Uncorded	Bullet	Hi-Vis Green	32	200 Pair Dispenser Box	10/Box
S23411	Uncorded	Bullet	Hi-Vis Green	32	500 Pair Bulk Pack	10/Packs
\$23412	Corded	Bullet	Hi-Vis Green	32	100 Pair Dispenser Box	20/Box
\$23413	Uncorded	Bullet	Hi-Vis Green	32	500 Pair In Wall Dispenser	8
S23414	Uncorded	Bullet	Hi-Vis Green	32	10 Pair in Retail Package	200/Pack

### **H10 DISPOSABLE EARPLUGS**

### H10 Disposable Earplugs—Bullet Shape

- Soft roll-down foam
- Smooth "bullet" shape for easy insertion
- High visibility for easy compliance monitoring
- Gravity feed display box

PRODUCT NO.	Description	NRR	Class	Case Count
67210	Uncorded	31	A(L)	200 Pairs/Box; 8 Boxes/Case
67212	Corded	31	A(L)	100 Pairs/Box; 8 Boxes/Case

### H10 Disposable Earplugs Dispenser and Bulk Pack (500 Pairs)

#### Earplugs

- Featuring H10 uncorded disposable foam earplugs
- 500 pairs (or 1000 earplugs) packed in a polybag

#### Dispenser

- Wall mountable and desktop ready
- Easy, flip open for quick refill
- Clear globe helps to indicate when to refill
- Mounting template and hardware included

PRODUCT NO.	Description	NRR	Class	Case Count
25708	Uncorded	31	A(L)	500 Pairs/Bag; 4 Bags/Case
25709	Dispenser	N/A	N/A	1 Dispenser/Case

### H10 Metal Detectable Disposable Earplugs

- Designed to deliver on performance and comfort and help you improve compliance
- Distinctive blue color for easy compliance monitoring
- Individual packaging for hygenic storage
- Universal size
- Metal embedded in the earplug for easy detection

PRODUCT NO.	Description	NRR	Class	Case Count
13821	Corded	31	A(L)	100 Pairs/Box; 8 Boxes/Case





\$23410



S23412





S23413

S23414





13821

HEARING PROTECTION

### sellstrom.



S23420



S23421



S23422





67220



13822

### EARPLUGS-PREMIUM REUSABLE

### **Reusable Earplugs—Tapered**

- Newly developed four-flange, tapered earplug ensures optimum ear canal coverage
- Firm push/pull post makes insertion and removal quick and easy
- One size fits all ٠
- Reusable—can be washed and reused dozens of times •
- Made with non-allergenic polymer materials •
- Plugs are individually packed in pairs and sold:
  - Uncorded = 100 pair/box
  - Corded = 100 pair/box
- Corded = 1 pair in see-through plastic storage case with belt clip
- Independently tested/certified to NRR 27 (ANSI S3.19)
- CSA Class AL



S23421

PRODUCT NO.	Туре	Shape	Color	Package	Case Qty.
S23420	Uncorded	Tapered	Blue/Hi-Vis Green	100 Pair/Box	20/Box
S23421	Corded	Tapered	Blue/Hi-Vis Green	100 Pair/Box	20/Box
S23422	Corded	Tapered	Blue/Hi-Vis Green	1 Pair/Plastic Case	500

### **H20 REUSABLE TRIPLE FLANGE EARPLUGS**

### H20 Reusable Earplugs—Tapered

- One size fits all
- Ridged for a better grip with insertion and removal
- Soft TPE flanges for comfortable fit and seal

PRODUCT NO.	Description	NRR	Class	Case Count
67220	Uncorded	26	A(L)	100 Pairs/Box; 4 Boxes/Case
67221	Corded	26	A(L)	100 Pairs/Box; 4 Boxes/Case

### H20 Metal Detectable Reusable Earplugs

- Designed to deliver on performance and comfort and help you improve compliance
- Distinctive blue color for easy compliance monitoring
- Individual packaging for hygenic storage
- Universal size
- Metal embedded in the earplug for easy detection

PRODUCT NO.	Description	NRR	Class	Case Count
13822	Corded	26	A(L)	100 Pairs/Box; 4 Boxes/Case

# **JACKSON SAFETY**

### EARPLUGS-PREMIUM BANDED


### **Banded Earplugs**

- Banded earplugs are designed to wear around the neck when not in use
- Ensures workers always have quality hearing protection when required
- Ideal for regular and intermittent applications—easily installed or removed
- Compliance enforcement is made easy due to the Hi-Vis green band
- Specially designed band shape is curved at the plug end—keeps the ear pods up and away from dirty and contaminated surfaces when not in use
- Comfortable blue earplugs/pods are easily replaced when dirty (\$23431)
- Used extensively on construction work sites, at airports and race tracks, in factory and shop applications, and wherever reusable ear protection is required
- Independently tested/certified to NRR 25 (ANSI S3.19)
- CSA Class AL

PRODUCT NO.	Туре	Shape	Color	Package	Case Qty.
S23430	Banded	Tapered	Hi-Vis Green	1/Bag	320
S23431		Replacement Blue Plugs/Po	ods (Pair)	10 Pair/Bag	2,400
		Blue ear pods are easily replaceable			
Hi-Vis green	band			Pods swi quick ad and com	justment
s solistime				ear pods dirty and	olug arm keep away from contaminate





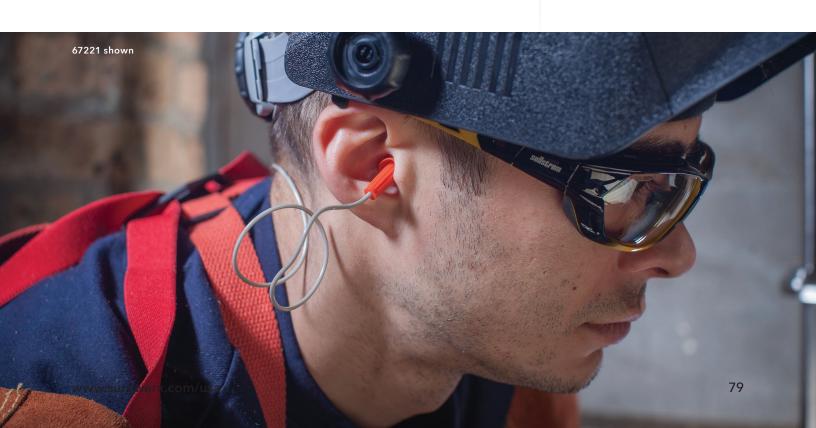

surfaces when not in use!







EAR MUFFS— SUPER PREMIUM DIELECTRIC







20774



20775

### H70 Vibe<sup>®</sup> Premium Dielectric Ear Muff

- Jackson's exclusive H70 Vibe® ear muffs offer premium comfort, fit, and protection
- Stylish, modern lightweight design
- Dielectric durable thermoplastic material protects you from electric shocks and shorts
- Headband, swivel fork arms, and cup pads have been carefully designed to deliver strength, durability, consistent noise reduction, and most importantly, to offer a comfortable snug fit with minimal pressure for all-day comfort
- Cup pads are super soft and comfortable—ideal for extended use
- ٠ Easily adjustable for quick and convenient positioning
- Features soft foam headband padding for maximum operator comfort and style
- Independently tested/certified to ANSI S3.19
- Available in both banded and hard hat cap mount format for use with slotted hard hats such as ٠ Jackson's SC-6
- Available in three popular NRR ratings
- Comes in four-color box with integrated fold-out hang tag •
- CE certified

#### Vibe Headband Style

PRODUCT NO.	Old Code	Cup Color	Headband	NRR Rating	Pkg. Qty.	Case Qty.
20773	3015087	Orange	Comfort Foam	23	1/Pack	20/Packs
20774	3015089	Red	Comfort Foam	26	1/Pack	20/Packs
20775	3015090	Black	Comfort Foam	29	1/Pack	20/Packs

#### Vibe Cap Mount Style

PRODUCT NO.	Old Code	Cup Color	Mount	NRR Rating	Pkg. Qty.	Case Qty.
20776	3015091	Orange	Cap Mount	22	1/Pack	20/Packs
20777	3015092	Red	Cap Mount	25	1/Pack	20/Packs
20778	3015093	Black	Cap Mount	27	1/Pack	20/Packs

### EAR MUFFS-PREMIUM DIELECTRIC

### HPD425 Premium Dielectric Ear Muff

- HPD425 ear muffs offer premium features and protection
- Stylish, modern lightweight design
- Dielectric—protects you from electric shocks and shorts
- Hi-Vis green/black cups are highly visible even in low light conditions
- Cup pads are soft and comfortable—ideal for extended use
- Heavy-duty non-conductive swivel fork arms ensure strength & durability
- Easily adjustable for quick and convenient positioning
- Features soft foam head band for maximum operator comfort and style
- Independently tested/certified to NRR 25 (ANSI S3.19)
- CSA Class A

PRODUCT NO.	Cup Color	Headband	NRR Rating	Pkg. Qty	Case Qty.
\$23407	Hi-Vis Green/Black	Soft EVA Foam	25 dB	10/Box	40

### EAR MUFFS-PREMIUM SERIES

- Sellstrom introduces a full range of ear muffs offering premium features
- Stylish, modern lightweight design
- Cup pads are soft and comfortable—ideal for extended use
- Strong stainless steel wire swivel fork arms ensure strength & durability
- Easily adjustable for quick and convenient positioning
- Feature soft EVA head bands for maximum operator comfort and style

### HP431 Premium Ear Muff

- The HP431 ear muff offers our highest NRR rating (31 dB)
- Ideal for work in very high noise environments
- Independently tested/certified to NRR 31 (ANSI S3.19)
- CSA Class A

PRODUCT NO.	Cup Color	Headband	NRR Rating	Pkg. Qty	Case Qty.
S23406	Black/Red	Soft EVA Foam	31 dB	10/Box	60

#### HP427 Premium Ear Muff

- Our most popular premium series ear muff
- Low profile "slim" design is ultra-lightweight and comfortable
- Folds into a very compact, easy-to-store size
- Independently tested/certified to NRR 27 (ANSI S3.19)
- CSA Class AL

PRODUCT NO.	Cup Color	Headband	NRR Rating	Pkg. Qty	Case Qty.
\$23404	Black/Orange	Soft EVA Foam	27 dB	10/Box	60

### HP424 Premium Ear Muff

- Low profile "slim" design is ultra-lightweight and comfortable
- Folds into a very compact, easy-to-store size
- Independently tested/certified to NRR 24 (ANSI S3.19)
- CSA Class A

PRODUCT NO.	Cup Color	Headband	NRR Rating	Pkg. Qty	Case Qty.
\$23403	Black	Soft EVA Foam	24 dB	10/Box	40

sellstrom.



S23407

#### Soft EVA foam headband



S23406





S23404

Soft EVA foam headband



S23403

HEARING PROTECTION



\*\*

BETTER

\*\*

BETTER

\*\*

BETTER

\*\* BETTER

### sellstrom.



S23400



S23401

### EAR MUFFS-ADVANTAGE SERIES

- Sellstrom carries two Advantage Series ear muffs
- Comfortable, lightweight, and economically priced
- Dielectric—protects you from electric shocks and shorts
- Cup pads are soft and comfortable—ideal for extended use
- Tough, long-lasting tension bands
- Easily adjustable for quick and convenient positioning

### Tonedown 200 Ear Muffs

- Our highest NRR rated economy ear muff (26 dB)
- Bright safety color yellow cups
- Independently tested/certified to NRR 26 (ANSI S3.19)

PRODUCT NO.	Cup Color	Headband	NRR Rating	Case Qty.
\$23400	Yellow	Curved Plastic	26 dB	40/Box

### H225 Ear Muffs

-

- Our most popular and economically priced ear muff
- Attractive blue cups
- Comes in convenient clamshell package for display purposes
- Independently tested/certified to NRR 25 (ANSI S3.19)
- CSA Class A

PRODUCT NO.	Cup Color	Headband	NRR Rating	Pkg. Qty.	Case Qty.
S23401	Blue	Curved Plastic	25 dB	10/Box	60



20771

### H70 PASSIVE EAR MUFFS

### H70 Onyx<sup>®</sup> Ear Muffs

- Lightweight, durable, and economical protection for low- to medium-level noise environments
- Ultra-soft ear cushions for comfort and extended wear
- Ball-and-socket pivoting cup attachment provides optimum pressure distribution
- Header bag packaging
- Earmuff is dielectric with no exposed metal parts

PRODUCT NO.	Old Code	Description	NRR Rating	Case Count
20771	3015085	Headband Style	23 dB	1/Pack
20772	3015086	Headband Style	26 dB	1/Pack

\* GOOD

\* GOOD

\* GOOD

**HEARING PROTECTION** 

### EAR MUFFS—SUPER PREMIUM CAP MOUNTED



\*\*\* BEST

\*\* BETTER

### **JACKSON**

### H70 Vibe<sup>®</sup> Ear Muffs—Super Premium Capmount

- Innovative design that adjusts to fit most head shapes and sizes
- Dielectric, durable thermoplastic material retains shape and pressure for consistent noise reduction
- Various noise level reductions available in capmount styles
- Exclusive Jackson Safety® designs
- Extreme comfort and fit
- Comes in four-color display box

PRODUCT NO.	Old Code	Description	NRR Rating	Case Count	Master Carton Qty.
20776	3015091	Capmount, Orange	22	1/Pack	20/Pack
20777	3015092	Capmount, Red	25	1/Pack	20/Pack
20778	3015093	Capmount, Black	27	1/Pack	20/Pack



(Hard hat and face shield not included)

### EAR MUFFS-PREMIUM CAP MOUNTED

### HPS428 Premium Cap Mounted Ear Muffs

- Designed to mount on to most brands of slotted hard hats
- Cup pads are soft and comfortable—ideal for extended use
- Strong stainless steel wire swivel fork arms ensure strength and durability
- Easily adjustable for quick and convenient positioning
- One of the highest NRR ratings for a cap-mounted muff (28 dB)
- Independently tested/certified to NRR 28 (ANSI S3.19)
- CSA Class A

PRODUCT NO.	Cup Color	Head Band	NRR Rating	Pkg. Qty	Case Qty.
\$23409	Black/Red	Soft EVA Foam	28 dB	10/Box	60



20776



20777



20778





S23409 (Hard hat not included) JACKSON SAFETY

**HEARING PROTECTION** 



## HEAD PROTECTION

## WORKING SAFE NAKES SENSE

www.surewerx.com/usa



### Jackson Safety® Hard Hat Portfolio



Hard hat customization now available on fully automated equipment.

### **Types & Class Standards**

Protective hard hats are classified according to the specific impact and electrical performance requirements they are designed to meet. All protective hard hats in accordance with this standard shall meet Type I impact requirements. In addition, all hard hats are further classified as meeting Class C, Class G, or Class E electrical requirements.

#### Impact Types

Type I: Hard hats intended to reduce the force of impact resulting from a blow only to the top of the head.

**Type II:** Hard hats intended to reduce the force of impact resulting from a blow which may receive limited protection odd center, lateral, or to the top of the head.

#### **Electrical Classes**

Class C (Conductive): Class C hard hats are not intended to provide protection against contact with electrical conductors. Class G (General): Class G hard hats are intended to reduce the danger of contact exposure to low-voltage conductors. test samples are proof-tested at 2,200 volts (phase to ground). However, this voltage is not as an indication of the voltage at which the hard hat protects the wearer.

Class E (Electrical): Class E hard hats are intended to reduce the danger of exposure to higher-voltage conductors. Test samples are proof-tested at 20,000 volts (phase to ground). However, this voltage is not intended as an indication of the voltage at which the hard hat protects the wearer.

### **Optional Standards**



**Reverse Donning:** Reverse-wearing option hard hats must pass force transmission requirements whether they are worn facing frontward or backwards in accordance with the manufacturer's wearing instructions.



Super-comfortable 6-pt. suspension

Comes standard with convenient built-in

### HEAD PROTECTION-CLIMBING STYLE INDUSTRIAL HARD HATS



Specially designed sliding vent holes allow easy opening and closing depending on weather conditions

Four external clips stabilize LED headlamp straps

> "Rapid dial" ratcheting mechanism allows quick and easy adjustment– even with gloves on!

chin strap and cup

### **CH HARD HATS**— INDUSTRIAL "CLIMBING" STYLE









CH-400V "Climbing Inspired" Industrial Hard Hat-Vented

- Introducing Jackson's new ultra-modern "climbing inspired" industrial hard hat
- Lightweight, molded from high-quality ABS materials
- Unique sliding vent hole system allows operator to open vents when working in direct sun/hot dry climates—or closed when used in cold or rainy conditions
- Super comfortable 6 pt. ratcheting suspension fits head sizes 6-1/2 to 8
- Rapid-Dial ratcheting headgear—just grab and adjust, even with gloves on
- Comfortable and convenient chin strap with molded chin cup for added security
- Comfortable, replaceable sweatband
- More comfortable than "traditional" hard hats
- Four external clips are strategically positioned to securely fasten elastic straps found on LED lighting systems
- Slotted adapters allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adapters, ear muffs and Safe 2 System
- Multiple accessories available, including ear muffs and face shield adaptor systems
- Dual rear slots allow use of optional red reflector for improved safety
- Hi-Vis reflective tape kit available for added safety
- Ideal for at-height and scaffolding work, confined space applications, construction sites requiring chin straps, and general all-around head protection
- Meets ANSI Z89.1, Type 1, Class C

PRODUCT NO.	Color	Suspension	Case Count
20920	White	6 pt. Rapid Dial	20
20921	Yellow	6 pt. Rapid Dial	20
20923	Orange	6 pt. Rapid Dial	20
20927	Black	6 pt. Rapid Dial	20

### HEAD PROTECTION-CLIMBING STYLE INDUSTRIAL HARD HATS

### CH-300 "Climbing-Inspired" Industrial Hard Hat—Non-Vented

- Introducing Jackson's new ultra-modern "Climbing-Inspired" industrial hard hat
- Lightweight, molded from high density polyethylene (HDPE)
- Super comfortable 6 pt. ratcheting suspension fits head sizes 6-1/2 to 8
- Rapid-Dial ratcheting headgear—just grab and adjust, even with gloves on
- Comfortable and convenient chin strap with molded chin cup for added security
- Comfortable, replaceable sweatband
- More comfortable than "traditional" hard hats
- Four external clips are strategically positioned to securely fasten elastic straps found on LED lighting systems
- Slotted adapters allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adapters, ear muffs, and Safe 2 System
- Hi-Vis reflective tape kit available for added safety
- Ideal for at-height and scaffolding work, confined space applications, construction sites requiring chin straps, and general all-around head protection
- Meets ANSI Z89.1, Type 1, Class C, G, E, and EN397 European Standards

PRODUCT NO.	Color	Suspension	Case Count
20900	White	6 pt. Rapid Dial	20
20901	Yellow	6 pt. Rapid Dial	20
20903	Orange	6 pt. Rapid Dial	20
20907	Black	6 pt. Rapid Dial	20
REPLACEMENT PARTS & ACCESSORIES	Description		Case Count
20930	Replacement Ratcheting Headgear (CH-30	20	
20933	CH-300/CH-400V Cap Adapter with Unive Window Mounting System	20	
20931	Replaceable Sweatbands	20/Pack	
20932	Replacement Chin Strap for CH-300 and C	1/Pack	
16797	Safe 2 Face Shield/Ear Muff Bracket (only)	1/Pack	
16150	JLHL-150 150 Lumen COB 3-Function IP54	12	
16250	JUHL-250 250 Lumen SMD/COB 4-Functio	24	
20936	Red Reflector (Mounts to CH-400V Dual R	ear Slots)	1/Pack
20937	Hi-Vis Reflective Tape Kit for any Hard Hat	Model	1/Pack



NEW!

COMING SOON!









16797 Face shield and ear muffs sold separately



20937 (Hard hat sold separately)



Capmount H70 Ear Muff 20776, 20777, 20778 (Hard hat and ear muffs sold separately)



**HEAD PROTECTION** 



### HEAD PROTECTION-FULL BRIM HARD HATS

Special fiberglass materials for highheat applications





\* \* \* BEST

Unique carbon fiber design pattern ensures a stylish, modern, and cool look!

> Extra-wide brim protects the worker from elements such as sun and rain

Available in vented and

non-vented models

Comfortable 4-pt. headgear suspension



SPEED DIAL

### **BLOCKHEAD® FG**— **NEW!** PREMIUM FIBERGLASS FULL-BRIM HARD HATS





Chin strap sold separately



### Blockhead FG Fiberglass Full Brim Hard Hat-Non-Vented

- Contoured dome shape with modern stylish ridgeline for unique identification
- Wrap-around brim further protects the worker from elements such as sun and rain
- Molded from special fiberglass materials—great for general and high heat applications
- Features Jackson's 370 Speed Dial ratcheting headgear—an industry best!
- 4 pt. ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Wrapped using a special water transfer decal to portray a stylish "composite" look
- A premium wide brim hard hat

• Meets ANSI Z89.1, Class C, G, and E

PRODUCT NO.	Color	Suspension	Case Count
20600	Composite Wrap	4 pt. 370 Speed Dial	20

### Blockhead FG Fiberglass Full Brim Hard Hat-Vented

- Same great features as non-vented version, but features vent holes to reduce heat build-up when working in direct sun and hot climates
- Vent holes reduce heat build-up when working in direct sun, hot climates and high-heat applications such as foundry and steel mill work environments
- Meets ANSI Z89.1, Class C

PRODUCT NO.	Color	Suspension	Case Count
20620	Composite Wrap	4 pt. 370 Speed Dial	20
REPLACEMENT PARTS	Description		Case Count
20630	Replacement Ratcheting Headgear (Block	khead FG Series)	12
20231	Replaceable Sweatbands	20/Pack	
20832	Optional Chin Strap	1/Pack	

### HEAD PROTECTION—FULL BRIM HARD HATS



SPEED DIAL



Super comfortable headgear suspension Made in USA

### **BLOCKHEAD®** PREMIUM FULL-BRIM HARD HATS

### Blockhead<sup>®</sup> Series Full Brim Hard Hat-Non-Vented


- Classic smooth dome shape for improved impact deflection
- Wrap-around brim further protects the worker from elements such as sun and rain
- Lightweight, molded in the **USA** from high density polyethylene (HDPE)
- Features Jackson's 370 Speed Dial ratcheting headgear—an industry best!
- Superior 6 pt. ratchet suspension—offers premium comfort and safety
- Fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Meets ANSI Z89.1, Class C, G, and E

PRODUCT NO.		Color	Suspension	Case Count
20697		White	6 pt. 370 Speed Dial	10
20698		Yellow	6 pt. 370 Speed Dial	10
20699		Blue	6 pt. 370 Speed Dial	10
20701		Orange	6 pt. 370 Speed Dial	10
20702		Red	6 pt. 370 Speed Dial	10
20718		Green	6 pt. 370 Speed Dial	10
20738		Hi-Vis Orange	6 pt. 370 Speed Dial	10
REPLACEMENT PARTS	Old Code	Description		Case Count
20703	3014879	6 pt. Suspension		6
14429	3000105	Sweatband		12/Bag
14937	3002430	2 pt. Chin Strap		12/Bag
18446	3009653	4 pt. Chin Strap		12/Bag

### COMING SOON!



6 pt. suspension



### JACKSO



20802





20820





Chin strap sold separately

90

### HEAD PROTECTION—FULL BRIM HARD HATS

### Advantage Series Full Brim Hard Hat—Non-Vented

- Contoured dome shape with modern stylish ridgeline for unique identification
- Wrap-around brim further protects the worker from elements such as sun and rain
- Lightweight, molded from high density polyethylene (HDPE)
- 4 pt. easy-dial ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband •

- Our most economical full brim hard hat
- Meets ANSI Z89.1, Type 1, Class C, G, and E

PRODUCT NO.	Color	Suspension	Case Count
20800	White	4 pt. Rapid Dial	20
20801	Yellow	4 pt. Rapid Dial	20
20802	Blue	4 pt. Rapid Dial	20
20803	Orange	4 pt. Rapid Dial	20
20804	Red	4 pt. Rapid Dial	20
20805	Hi-Vis Orange	4 pt. Rapid Dial	20

### Advantage Series Full Brim Hard Hat—Vented

• Same great features as non-vented version, but features vent holes to reduce heat build-up when working in direct sun and hot climates



- Meets ANSI Z89.1, Type 1, Class C
- PRODUCT NO. Case Count Color Suspension White 4 pt. Rapid Dial 20820 20 20821 Yellow 4 pt. Rapid Dial 20 20822 4 pt. Rapid Dial 20 Blue 20823 Orange 4 pt. Rapid Dial 20 20824 Red 4 pt. Rapid Dial 20 Hi-Vis Orange 20825 4 pt. Rapid Dial 20 **REPLACEMENT PARTS** Description Case Count 20230 Replacement Ratcheting Headgear (Advantage Series Front Brim and Full Brim) 20 20231 **Replaceable Sweatband** 20/Pack 20832 **Optional Chin Strap** 1/Pack



\* GOOD

NEW

### HEAD PROTECTION—CAP-STYLE SLOTTED HARD HATS

### Advantage Series Cap-Style Slotted Hard Hat—Non-Vented

- Contoured dome shape with modern stylish ridgeline for unique identification
- Longer bill for improved protection from sun and falling debris
- Built-in rain trough helps shed water away from the neck
- Slotted adaptors allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adaptors and Vibe ear muffs
- Lightweight, molded from high density polyethylene (HDPE)
- 4 pt. easy-dial ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Our most economical cap style hard hat
- Meets ANSI Z89.1, Type 1, Class C, G, and E

PRODUCT NO.	Color	Suspension	Case Count
20200	White	4 pt. Rapid Dial	20
20201	Yellow	4 pt. Rapid Dial	20
20202	Blue	4 pt. Rapid Dial	20
20203	Orange	4 pt. Rapid Dial	20
20204	Red	4 pt. Rapid Dial	20
20205	Hi-Vis Orange	4 pt. Rapid Dial	20





COMING SOON!







Chin strap sold separately











Chin strap sold separately

JACKSON SAFETY

### Advantage Series Cap-Style Slotted Hard Hat–Vented

- Contoured dome shape with modern stylish ridgeline for unique identification
- Longer bill for improved protection from sun and falling debris
- Built-in rain trough helps shed water away from the neck
- Slotted adaptors allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adaptors and Vibe ear muffs
- Lightweight, molded from high density polyethylene (HDPE)
- 4 pt. easy-dial ratchet suspension fits head sizes 6-1/2 to 8  $\,$
- Comfortable, replaceable sweatband
- Our most economical cap style hard hat
- Vent holes reduce heat build-up when working in direct sun and hot climates
- Meets ANSI Z89.1, Type 1, Class C

PRODUCT NO.	Color	Case Count			
20220	White	4 pt. Rapid Dial	20		
20221	Yellow	4 pt. Rapid Dial	20		
20222	Blue	4 pt. Rapid Dial	20		
20223	Orange	4 pt. Rapid Dial	20		
20224	Red	4 pt. Rapid Dial	20		
20225	Hi-Vis Orange	4 pt. Rapid Dial	20		
REPLACEMENT PARTS	Description	Description			
20230	Replacement Ratcheting Headgear (Advantage	20			
20231	Replaceable Sweatband	20/Pack			
20832	Optional Chin Strap		1/Pack		



### HEAD PROTECTION—CAP-STYLE SLOTTED HARD HATS



Premium **370 Speed Dial**™ ratcheting headgear

Slotted cap allows use with dozens of Jackson hard hat accessories including our exclusive Hard Hat Interchange System Reverse donning rated



Smooth dome shape for improved impact deflection

Comfortable 4-pt. suspension





SC-6 Hard Hat works with the Hard Hat Interchange System



Longer bill for improved – protection from sun and falling debris

### **SC-6**— Premium CAP-Style Hard Hat



14833





### SC-6 Cap-Style Slotted Hard Hat—Non-Vented

- Classic smooth dome shape for improved impact deflection
- Longer bill for improved protection from sun and falling debris
- Slotted adaptors allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adaptors and ear muffs
- Lightweight, molded in the **USA** from high density polyethylene (HDPE)
- Meets reverse donning standards
- 4 pt. ratchet suspension fits head sizes 6-1/2 to 8
- Features Jackson's 370 Speed Dial ratcheting headgear—an industry best!
- Comfortable, replaceable sweatband
- Our most popular hard hat!
- Meets ANSI Z89.1, Type 1, Class C, G, and E
- CSA certified to CSA Z94.1, Type 1, Class E







Reverse donning

www.surewerx.com/usa

PRODUCT NO.	Old Code	Color	Suspension	Case Count
14833	3001987	Yellow	4 pt. 370 Speed Dial	12
14834	3001988	White	4 pt. 370 Speed Dial	12
14836	3001989	Brown	4 pt. 370 Speed Dial	12
14838	3001991	Blue	4 pt. 370 Speed Dial	12
14839	3001992	Orange	4 pt. 370 Speed Dial	12
14841	3001993	Red	4 pt. 370 Speed Dial	12
14842	3001994	Gray	4 pt. 370 Speed Dial	12
14843	3001996	Hi-Vis Orange	4 pt. 370 Speed Dial	12
REPLACEMENT PARTS		Description		Case Count
14936	3002428	4-pt. Suspension		6
14937	3002430	2-pt. Chin Strap		12/Bag
14958	3002459	Sweatband		25/Bag

JACKSON<sup>®</sup>

1

www.surewerx.com/usa







14409



6 pt. Ratchet Suspension

### HEAD PROTECTION—CAP-STYLE SLOTTED HARD HATS

### Sentry III<sup>®</sup> Cap-Style Slotted Hard Hat-Non-Vented

- Low profile, silhouette-styled hard hat
- Longer bill for improved protection from sun and falling debris
- Flat, customizable front area
- Low riding nape strap
- Slotted adaptors allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adaptors and ear muffs
- Lightweight, molded in the **USA** from high density polyethylene (HDPE)
- Meets reverse donning standards
- 6 pt. ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
  Meets ANSI Z89.1, Type 1, Class C, G, and E



\*\*

BETTER



Reverse donning

PRODUCT NO.	Old Code	Color	Suspension	Case Count
14407	3000061	Yellow	6 pt. Ratcheting	12
14409	3000064	White	6 pt. Ratcheting	12
14416	3000072	Blue	6 pt. Ratcheting	12
14418	3000075	Red	6 pt. Ratcheting	12
14420	3000078	Orange	6 pt. Ratcheting	12
14423	3000085	Hi-Vis Orange	6 pt. Ratcheting	12
REPLACEMENT PARTS		Description		
14426	3002428	6-pt. Suspension		6
14429	3002459	Sweatband		12/Bag
14434	3002430	2-pt. Chin Strap		25/Bag
18446	3009653	4-pt. Chin Strap		12/Bag






### HEAD PROTECTION-CAP-STYLE SLOTTED HARD HATS

### Charger<sup>®</sup> Cap-Style Slotted Hard Hat—Non-Vented

- Contoured dome shape with heavy ridgeline for unique identification
- Shorter bill for improved upward vision
- Built-in rain trough helps shed water away from the neck
- Slotted adaptors allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adaptors & ear muffs

- Lightweight, molded in the **USA** from high density polyethylene (HDPE)
- Meets reverse donning standard
- 4 pt. ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband





\*\*

PRODUCT NO.	Old Code	Color	Suspension	Case Count
20392	3013362	White	4 pt. Ratcheting	12
20393	3013363	Blue	4 pt. Ratcheting	12
20394	3013364	Red	4 pt. Ratcheting	12
20395	3013365	Hi-Vis Orange	4 pt. Ratcheting	12
20397	3013367	Gray	4 pt. Ratcheting	12
20398	3013368	Orange	4 pt. Ratcheting	12
20401	3013370	Yellow	4 pt. Ratcheting	12
20403	3013372	Neon Pink	4 pt. Ratcheting	12
REPLACEMENT PARTS		Description		Case Count
14429	3000105	Sweatband		12/Bag
14434	3000114	2-pt. Chin Strap		25/Bag
18446	3009653	4-pt. Chin Strap		12/Bag
20422	3013403	4-pt. Suspension		6





4 pt. Ratchet Suspension



HEAD PROTECTION





#### (14809-14816)

### It's as Easy as 1, 2, 3!

1

Order Jackson Safety's C10 bump cap with face shield adaptor (20186-20192)



#### 2

Attach our new Jackson Safety 8" x 15.5" x .035" Shape E/N face shield window with **anti-fog** coating (28764)



### 3

You're safe to go with a complete bump cap, adaptor and **anti-fog** face shield kit!



### **HEAD PROTECTION-BUMP CAPS**

### Jackson Bump Caps, Adaptors, and Window Solutions

### C10 Bump Cap Series (Bump Caps only)

- Bump caps are used to protect your head from minor bumps and scalp lacerations
- 4 pt. pin-lock suspension fits head sizes 6-1/2 to 8-1/4
- Features an absorbent brow pad for added comfort
- Can be customized with your company logo and branding needs
- Please note: To convert an existing bump cap for use with a face shield, use 14946 Jackson hard hat adaptor with 29107 8" x 15.5" x .035" PETG anti-fog window

PRODUCT NO.	Cap Color	Suspension	Case Qty.
14809	Yellow	Pinlock	12
14811	White	Pinlock	12
14812	Green	Pinlock	12
14813	Blue	Pinlock	12
14814	Orange	Pinlock	12
14815	Red	Pinlock	12
14816	Gray	Pinlock	12

### C10 Bump Cap Series c/w Face Shield Attachment

- Same great features as above but includes an installed face shield adaptor
- Exclusive attachment converts your bump cap into a cap/face shield combo
- Uses Jackson windows:
  - 28764 8" x 15.5" x .035" clear PETG anti-fog window (Recommended)
     28765 6" x 15.5" x .040" clear PETG window
- Model #28765 does not meet ANSI Z87.1 standards due to coverage limitations
- Please note: Windows sold separately

PRODUCT NO.	Cap Color	Suspension	Case Qty.
20186	White	Pinlock	12
20187	Yellow	Pinlock	12
20188	Blue	Pinlock	12
20189	Green	Pinlock	12
20191	Red	Pinlock	12
20192	Orange	Pinlock	12
20193	Gray	Pinlock	12

#### C10 Bump Cap Replacement Parts

PRODUCT NO.	Description	Case Qty.
20194	4 pt. Suspension	6
18428	Sweatband	12/Bag

### Universal Fit Adaptor & Window

Did you know? Our Jackson Safety 14946 universal hard hat adaptor fits most bump caps on the market. Use this adaptor along with our new 29107 **anti-fog** window to quickly convert your bump cap into a bump cap/face shield system



14946

Universal fit hard hat/ bump cap adaptoruses universal pin pattern window mounting system

**29107** 8" x 15.5" x.035" PETG Shape E Anti-fog

### **HEAD PROTECTION-COWBOY HARD HAT**

### Western Outlaw® Hard Hat

- Popular cowboy-style hard hat offers unique style and image
- 4 pt. ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Meets ANSI Z89.1, Type 1, Class C, G, and E





PRODUCT NO.	Old Code	Color	Suspension	Case Count
17330	3007313	Black	Ratcheting	4
19500	3010943	White	Ratcheting	4
19502	3010944	Tan	Ratcheting	4
REPLACEMENT PARTS		Description		Case Count
14429	3000105	Sweatband		12/Bag
14459	3000187	4-pt. Suspension		6



19502





### HARD HAT CUSTOMIZATION PROGRAM

Did you know? SureWerx recently acquired new, state-of-the-art automated hard hat customization equipment, allowing corporate logo placement on all Jackson brand hard hats.



Contact your local Jackson distributor for complete details.





38423



38424







39476

### HEAD PROTECTION—HARD HAT ACCESSORIES

### Hard Hat Interchange System for Slotted Hard Hats

- One-button action for quick release, even with gloves on
- Vertical lock-in eliminates helmet/face shield creep
- Audible click—know your PPE is assembled correctly without visual inspection
- Keep your hard hat ANSI Z98.1 Class E rated with dielectric Hard Hat Interchange System
- Accommodates all Jackson Safety® face shields, HSL Series hoods, Halo X hoods and Nitro® hoods
- Allows operator to quickly change from face shield to welding helmet protection in seconds!
- A Jackson Safety® exclusive

CODE	Description	Case Count
39477	HHIS Master Kit contains all components necessary to mount welding helmets and face shields to your hard hat	6
38423	Replacement HHIS Knobs for 14425/14235/14238 QUAD 500™	6
38424	Replacement HHIS Knobs for 14202/14203 MAXVIEW™ and 14260/14262 F4XP	6
38425	HHIS Face Shield Kit contains all components necessary to mount face shields to your hard hat	6
38426	HHIS Welding Helmet Kit contains all components necessary to mount welding helmets to your hard hat	6
39476	Replacement Mounting Blades for SC-6 Series Hard Hats	6





JACKSON HARD HAT ACCESSORY COMPATIBILITY CHART										
Hard Hat INTERCHANGE Interchange System	CH-300	CH-400V	ADVANTAGE CAP STYLE	CHARGER	SENTRY III	SC-6	ADVANTAGE FULL BRIM	BLOCKHEAD II	BLOCKHEAD FG	C10 BUMP CAPS
14939/14941 87 Mounting Blades 14949 82 B Cap Adaptor			1	1	1	1				
14947 437 Cap Adaptor			1	1	1	1				
14944 382-B Cap Adaptor			1	1	1	1				
14391 Model P Cap Adaptor			1	1	1	1				
14948 Model 137 Cap Adaptor			1	1	1	1				
14390 Model C Cap Adaptor			1	1	1	1				
14943 Model 282-B Cap Adaptor										
14942 Model 182-B Cap Adaptor			1	1	1	1				
14946 Model 337 Cap Adaptor	1	1	1	1	1	1				1
14505 Model A-5500SN Cap Adaptor			1	1	1	1				
14506 Model A-5500X Capshield				1	1	1				
14393 Model H Cap Adaptor							1	1	1	
14945 Model 37 Cap Adaptor							1	1	1	
S61602 Cap Adaptor							1	1	1	
S61900 Cap Adaptor	1	1	1	1	1	1				1
S61600 Cap Adaptor			1	1	1	1				1
S61601 Cap Adaptor							1	1	1	
S61610 Cap Adaptor			1	1	1	1				
S61970 Universal Slot Adapter (USA)	1	1	1	1	1	1				
16797 Safe 2 System	1	1	1	1	1	1				
20774 H70 Vibe Ear Muffs Capmount Series	1	1	1	1	1	1				
S23409 Ear Muffs	1	1	1	1	1	1				
14202/14203 Maxview—HHIS	1	1	**	1	1	1				
14225/14235/14238 Quad 500—HHIS	1	1	**	1	1	1				
DP4—USA Adaptor			*	*	*	*				
380/390 Series—USA	1	1	1	1	1	1				
20933 Climbing Hard Hat Adaptor	1	1	1	1	1	1				

\* Reverse Donning only \*\*New HHIS version coming 2021

### **Drybrow Sweatband**

- Keeps you cool and prevents perspiration from running into your eyes in hot and humid conditions
- Ideal for all applications where workers need to be kept cool and comfortable
- $\bullet \ \ \, \mbox{Individually sleeved for increased shelf life and vending machine incorporation}$
- Finished dimensions: 8.7" long x 1.6" wide x 5mm thick

PRODUCT NO.	Old Code	Description	Case Qty.
16750	3005344	Drybrow Sweatband	25/Bag



16750

**HEAD PROTECTION** 



HEAD PROTECTION/WINTERLINERS

### JACKSON® BAFETY



14494



14496



14497



14502



14499

### HARD HAT ACCESSORIES

### AA-7 Windgard<sup>®</sup> Head Protection

- Snug fitting cap style fits over most partial brim hard hats
- Keeps wind out, traps warmth, and prevents moisture build-up
- Made with dielectric material to allow use near electrical hazards
- Provides warmth for temperatures from 32° to 0°F (0°to -20°C)

PRODUCT NO.	Old Code	Description	Case Qty.
14494	3000434	AA-7, Navy Blue	12/Pack
14495	3000435	AA-7, Orange	12/Pack
16756	3005341	AA-7, Red	12/Pack

### AA-8 Windgard<sup>®</sup> Head Protection

- Fits over most full brim style hard hats
- Keeps wind out, traps warmth, and prevents moisture build-up
- Made with dielectric material to allow use near electrical hazards
- Provides warmth for temperatures from 32° to 0°F (0°to -20°C)

PRODUCT NO.	Old Code	Description	Case Qty.
14496	3000436	AA-8, Red	12/Pack

### AA-9 Windgard<sup>®</sup> Head Protection

- Warmth for temps 0° to -20°F (-20°to -28°C)
- Full face and neck model protects mouth and cheeks
- Fits over most safety caps

PRODUCT NO.	Old Code	Description	Case Qty.
14497	3000434	AA-9, Navy Blue	12/Pack

### **SEASONAL WINTERLINERS**

#### **225 Plus Winterliner**

- Can be worn under caps and hats
- Hook-and-loop fastener for a comfortable, close fit
- Outer shell: quilted nylon with extra-thick foam fill
- Lining: polyester fleece
- Meets 16 CFR 1610, Class 1

PRODUCT NO.	Old Code	Description	Case Qty.
14502	3000442	225 Plus Winterliner	12/Pack

### 325 Ultra Winterliner

- Ideal for cold weather environments
- Can be worn over hearing products
- Top section is flame-retardant
- Bottom section is flame-resistant
- Detachable bottom section is double-layered, heavy-spun polyester
- Nape piece closes with two buttons
- Top shell: cotton twill
- Lining: brushed 100% polyester fleece (top only)
- Bottom shell: double nylon knit
- Meets 16 CFR 1610, Class 1

PRODUCT NO.	Old Code	Description	Case Qty.
14499	3000439	325 Ultra Winterliner	3/Pack

### **SEASONAL WINTERLINERS**

### **400 Ultra Winterliner**

- Ideal for extreme cold weather environments
- Full head and neck coverage with extra-long nape and wraparound collar
- Shoulder length that can be tucked into jacket
- Outer shell: cotton twill
- Lining: polyester sherpa
- Meets 16 CFR 1610, Class 1

PRODUCT NO.	Old Code	Description	Case Qty.
14501	3000441	400 Winterliner	3/Pack

### Wind Jammer IV

- Ideal for extreme cold weather environments
- Long nape and wraparound design provides extra warmth and a snug fit
- Silver with black fastener straps and elastic border stitching
- Meets 16 CFR 1610, Class 1

PRODUCT NO.	Old Code	Description	Case Qty.
16760	3005346	Wind Jammer IV	6/Pack

### **FLASH-TEX® LINERS**

Flash-Tex® liners are designed to assist in complying with OSHA 1910.269.

### FLASH-TEX<sup>®</sup> LINERS-650 NPR AND 695 NPR

Flame-Resistant		Laundering Data		Char Length <sup>†</sup>	
Outer Shell	Inner Shell	Outer Shell	Inner Shell	Outer	Inner
Nomex® Inherently flame-resistant	Proban <sup>®</sup> durable flame-resistant	FR properties last lifetime	Retains FR properties up to 25 industrial washes or 50 domestic washes	2.4	3.5

**Note:** Data obtained from material manufacturers' testing. For additional technical information, contact Customer Service.

†The length of brittle residue when material is exposed to thermal energy

#### **695 NPR Winterliner**

- Ideal for very cold weather environments
- Full head and neck liner with wide wraparound collar
- Universal to fit all head sizes
- Leather/Nomex<sup>®</sup> tabs attach to hard hats
- Provides protection from electrical arc energy exposure
- Outer shell: retains FR protection throughout life of product—100% Nomex® IIIA
- Inner shell: flame resistance through 25 industrial washes or 50 domestic washes— 100%  $\rm Proban^{\odot}$  cotton

PRODUCT NO.	Old Code	Description	Case Qty.
16767	3005355	695 NPR Winterliner	3/Pack

### Nomex<sup>®</sup> Head Winterliner

- 100% Nomex<sup>®</sup> double-layered, knitted hood provides extra protection around the face
- Full head and neck coverage with extra-wide collar
- Shoulder-length collar can be tucked into jacket
- Can be worn under a hard hat or welding helmet as protection against flame and electrical arcs
- Retains FR protection throughout life of the product

PRODUCT NO.	Old Code	Description	Case Qty.
14504	3000444	Nomex <sup>®</sup> Hood	12/Pack





WINTERLINERS



JACKSO



16760





### **JACKSON SAFETY® RESPIRATORS**

Jackson Safety® particulate respirators deliver the protection you expect and the comfort you need for all-day wear.

R30	N99 Particulate Respirator
R20	P95 Particulate Respirator
R10	N95 Particulate Respirator
R05	Disposable Dust Mask



### **COLOR-CODED PARTICULATE DISPOSABLE RESPIRATORY PROTECTION**

Jackson Safety <sup>®</sup> Brand Respiratory Protection Products								
Product	CODE		Protection Level			Color Code		Valve
		N95	P95	N99	Blue	Yellow	Red	
R05	12978							None
R10	64230/64235	•			•			None
R10	64240	٠			•			Single
R20	64420		•			•		Single
R30	64520			•			•	Single



64235



### Introducing

### The New R10 N95 Standard For All-Day Comfort, Fit, and Safety!

That's right! Jackson Safety is pleased to introduce an all-new N95



NIOSH-approved foldable disposable respirator designed for maximum all-day comfort. When your job requires the wearing of a protective mask, our Jackson 64235 introduces a new ultra-soft, ultra-comfortable respirator that significantly reduces facial irritation and discomfort. The pouch-style breathing chamber offers exceptional breathability while at the same time ensuring a minimum 95% filtration efficiency. Look at these outstanding features:

- Ultra-soft non-irritating lining offers superior comfort over traditional N95 respirators
- Pouch-style breathing chamber provides exceptional breathability—check and compare!
- Two 1/2" extra-wide head straps and an adjustable nose clip further improves comfort and helps to ensure a tight facial seal, preventing leakage around the mask edges
- Nose clip reduces potential fogging of glasses and face shields
- Unlike traditional N95 masks, these respirators fold flat, reducing storage space requirements and shipping costs, as well as reducing the chance of product damage
- N95 NIOSH rating provides a minimum 95% filtration efficiency of 0.3 micron particles
- Features two layers of electrostatically treated melt-blown filter media,
- A single-use respirator designed for use by skilled professionals in critical environments who are mandated to wear specific PPE to protect against the transfer of aerosolized solid and non-oil based liquid/particulate matter
- Compatible with a variety of SureWerx protective eyewear and hearing protection
- Packed 50 per bag, 6 bags (300 pieces) per case
  Disclaimer: Not intended for medical use



PRODUCT NO.	Description	Shape	Baq Qty.	Case Qty.
64235	N95 Particulate Respirator	Pouch Style	50	6 Bags/300 Pcs

**RESPIRATORY PROTECTION** 

### **RESPIRATOR PROTECTION-DISPOSABLE RESPIRATORS**

### **R05 Disposable Dust Mask**

- Basic protection against non-toxic dust, household allergens, mold, and pollen
- Adjustable nose clip provides a secure fit
- Universal size
- Does not provide lung protection



JACKSO

JACKSON SAFETY

PRODUCT NO.	Description	Case Count	
12978	Disposable Dust Masks	50/Box, 20 Boxes/Case	

### Due to overwhelming demand, please contact a SureWerx representative for delivery information.

### **R10 N95 Particulate Respirator**

- Comfortable, soft foam nose pad
- Highly visible, color-coded straps
- Knitted elastic straps ultrasonically attached
- Not made with natural rubber latex
- Code 64240 meets heat and flame resistance per ANSI/ISEA 110-2009



PRODUCT NO.	Description	Protection	Strap Color	Case Count
64230	N95 Particulate Respirator (No Valve)	N95	Blue	20/Box, 8 Boxes/Case
64240	N95 Particulate Respirator (Single Valve)	N95	Blue	10/Box, 8 Boxes/Case





64420



64520

### **R20 P95 Particulate Respirator**

- Effective against all oil based and non-oil based particulate aerosols and dust that do not emit harmful vapors
- Soft foam nose pad with bendable nose clip
- Highly visible, color-coded straps
- Knitted elastic straps ultrasonically attached
- Not made with natural rubber latex

National Institute for Occupational Safety and Health ®	
--	--

NIOS

se

PRODUCT NO.	Description	Protection	Strap Color	Case Count
64420	P95 Particulate Respirator (Single Valve)	P95	Yellow	10/Box, 8 Boxes/Case

### **R30 N99 Particulate Respirator**

- Full perimeter foam inside mask
- Adjustable head straps
- Soft foam nose pad with bendable nose clip
- Highly visible, color-coded straps
- Knitted elastic straps ultrasonically attached
- Not made with natural rubber latex

PRODUCT NO.	Description	Protection	Strap Color	Case Count
64520	N99 Particulate Respirator (Single Valve)	N99	Red	10/Box, 8 Boxes/Case



### sellstrom. KneePro

### **KNEE & ELBOW PROTECTION**

## ULTIMATE CONFORT ALL DAY EVERY DAY

### sellstrom.

### **KNEE PADS**— Premium grade

## KneePro



S96110

### KneePro Ultra Flex III Knee Pads

- Sellstrom's KneePro Ultra Flex III knee pads have been the industry standard for more than 30 years
- Simply the best knee pads made!
- The articulating hinged design ensures proper placement all day long—set them once and forget you are even wearing them
- Soft elastic, extra-wide woven straps with reinforced sewn ends are placed well above and below the knee—no Velcro, which contaminates over time
- Straps stay aligned with your legs in any position—will not bind behind the knee
- Built with strong, flexible hard plastic outer shells that extend well above, below and to the inside/outside of the knee for added knee and leg protection
- Metal rivet hinge ensures long lasting protection while kneeling or walking
- On the outside, pads feature a perfectly placed curved non-marking Grip Strip
- Grip-Strip designed for use in all applications without gumming up
- Grip Strips are easily replaceable
- On the inside, pads offer a long lasting 5/8" closed cell foam pad for maximum comfort and protection (KneePro Ultra Flex III version)
- Sweat does not penetrate closed cell foam—lasts longer and won't "stink"
- **Our KneePro Hybrid Ultra Flex III** version offers even greater user comfort and protection through the use of a three layer, 3/4"-thick closed cell foam pad with built-in gel packs—the ultimate in knee protection!
- Virtually indestructible—built for years of hard work and heavy use
- Specially designed Quick-Snap clips ensure quick and easy removal
- Comes in convenient, reusable mesh bag with one extra Quick-Snap clip
- Pads weigh only 9 oz. each
- Straps, Grip Strips, and speedklips are replaceable
- Excellent for welders, ship builders, roofers, construction workers, flooring installers, and anywhere hard-working knee pads are required

# **KNEE PADS-PREMIUM GRADE**

#### KneePro Ultra Flex III Knee Pads

PRODUCT NO.	Mod. No.	Shell Color	Grip Strip	Pkg. Qty.
S96110	KPUF03	Grey	Orange	6/24 Pair
\$96111	KPUFO3-B	Black	Black	6/24 Pair
\$96112	KPUF03-G	OD Green	OD Green	6/24 Pair
\$96113	KPUF03-T	Tan	Tan	6/24 Pair
S96114	KPUF03-F	Foliage	Foliage	6/24 Pair

#### KneePro "Hybrid" Ultra Flex III Knee Pads

- The **KneePro Hybrid Ultra Flex III** offers all of the same legendary features as the KneePro Ultra Flex III pad but has the added advantage of a built-in gel pack for added comfort and fit
- This is the ultimate knee pad for extreme applications where users are on their knees for extraordinarily long periods of time
- Unlike many gel pads on the market, our gel packs are securely placed inside a three-layer, 3/4" closed cell foam knee protector compartment and are guaranteed to stay leak free
- Available with black shells and Hi-Vis orange Grip Strip

PRODUCT NO.	Mod. No.	Shell Color	Grip Strip	Pkg. Qty.
S96211	KPUF03-H	Black	Hi-Vis Orange	6/24 Pair



# sellstrom.







S96112



S96114

# sellstrom.



S96110-7



\$96350

Serrated inner pads channel air flow, creating cooler working environment.

# **KNEE PADS-PREMIUM GRADE**

## KneePro Ultra Flex III Knee Pad Replacement Parts



PRODUCT NO.	Description	Set
\$96110-7	KneePro III Replacement Grip Strips-Orange (PR)	1 Pair (2 pcs.)
S96110-6	Knee Pad Pro III Replacement Straps and Clips (Kit)	4 of Each

# **KNEE PADS-SPECIALTY**



#### KneePro Roofers Knee Pads

- The KneePro Roofers vented foam rubber knee pads are specially designed for the tough roofers industry
- Manufactured using a special grade of ultra-dense rubber, offering extreme durability
- Non-marring rubber leaves no transfer on surfaces
- Inner pads are serrated, creating channels that allow air to flow through the pad
- These channels dissipate heat, creating a cooler working environment at the knee
- Ideal for roofers working in high-heat applications
- Straps are located to allow the calf muscle curvature to help hold the pads in place without pinching the knee joint
- The upper end of the pads is hooked upward and inward to help hold the pads in place on the knee
- Weight—1.25 lbs. per pad, 2.5 lbs. per pair
- Ideal for roofers, welders, and anyone kneeling on heated surfaces

PRODUCT NO.	Mod. No.	Shell Color	Туре	Pkg. Qty.
\$96350	KPVFR	Black	Roofers	6/12



S96310

# **KNEE PADS**—ADVANTAGE SERIES

#### KneePro ZeroGravity Lightweight Knee Pads

- The KneePro ZeroGravity knee pad is one of the lightest yet toughest knee pads on the market today—weigh only 2 oz. each
- So light, you won't even know you have them on!
- The outer shell is made using a durable, heat-formed, non-marking material for maximum life
- The inner closed cell foam protective pad is a full 1/2" thick for superior comfort
- Pad is molded to contour of knee, which helps it to stay in place during use
- Revolutionary new fastening system pops in and out like a button for easy and convenient on/off action
- To adjust the strap, simply pull the strap end to a comfortable size
- Extra-wide, soft woven elastic cloth strap for improved comfort and fit
- Economically priced but built for hours of long-lasting protection and comfort
- Ideal for roofing, plumbing, flooring, tiling, gardening, carpentry, electrical work, maintenance, and home repair

PRODUCT NO.	Mod. No.	Shell Color	Pkg. Qty.
\$96310	KPZG03	Gray	20/100 Pair
\$96311	KPZGO3-G	OD Green	20/100 Pair



# **ELBOW PADS-PREMIUM SERIES**

#### ArmorPro Tactical Elbow Pad

• The ArmorPro Tactical Elbow Pad is the ultimate in elbow and arm protection

**ArmorPro** 

- The 11" long, abrasion-resistant foam and rubber body protects most of your arm
- Secures to your body with comfortable extra-wide top and bottom cinch straps
- Pull tabs help with adjustment even when wearing gloves
- Pad stays in position until you decide to change or remove
- Body is extremely flexible, becoming an extension of your arm
- Elbow protecting cap slides up and down for personal adjustment, comfort, and fit:
  - Shift cap to upper position for arm protection during belly crawl, or
  - Lower position for sniper stand off—your choice, your comfort
  - Tough grip cap holds your elbow in place on any surface
- Lightweight and cool—only weighs 7 ounces (each pad)
- Available in four colors: Black, OD Green, Tan and Foliage/Coyote Brown

PRODUCT NO.	Mod. No.	Shell Color	Pkg. Qty.
\$96410	КРАР07-В	Black	6/12/24 Pair
S96411	KPAP07-G	OD Green	6/12/24 Pair
S96412	KPAP07-T	Tan	6/12/24 Pair
<b>S96413</b>	KPAP07-F	Foliage	6/12/24 Pair





S96410



S96411



S96412



S96411

KNEE & ELBOW PROTECTION



WARNING: Due North<sup>\*</sup> traction aids help give you traction on ice, snow, or similar porous surfaces. However, because NO product can completely prevent a slip or fall on slippery surfaces, remember to exercise care when walking or running in Due North<sup>\*</sup> traction aids. Caution should also be taken when moving on any hard or polished surface, such as granite or marble, on ladders, or when driving a vehicle. Use care, as these traction aids are sharp and may injure or damage flooring, surfaces, or skin. Due North<sup>\*</sup> traction aids are not to be used for mountaineering or hiking, in rocky terrain, or when the user may encounter steep up or down slopes. Due North<sup>\*</sup> traction aids are not designed or intended to be used on high heel footwear. This product contains latex.

# duenorth®

# **SLIP PROTECTION**

# KEEPING VOU GROUNDED

www.surewerx.com/usa

# ICE TRACTION AIDS

#### Superior in all ways!

- Exclusive "military grade" tungsten carbide replaceable spikes for superior strength
- Extra-strong spike material allows Due North to use a smaller diameter spike,
- resulting in faster, easier ice penetration while ensuring longest life!



100% rubber is far superior to competitors using synthetic materials-check and compare!

# ALL PURPOSE VERSION SHOWN

Provides maximum flexibility and durability in extreme cold conditions

# **LEADING THE WAY** FOR REPLACEABLE SPIKE ICE TRACTION AID PERFORMANCE

Due North® Winter Traction product is ideal for those who walk, run, or work outdoors and require more stability and increased traction. Whether you're an industrial worker or someone who just needs extra stability in winter conditions, the enhanced design and improved shape will give you the extra confidence you need when walking or running on icy and snow conditions. The increased traction will help with preventing slips and falls on ice and snow, which reduces the risk of pulled muscles, fractured bones, or even back problems caused by a quick slip or fall. When not in use, the compact design makes them easy to store in small places, such as your coat pocket, handbag, briefcase, or the glove box in your vehicle.





# **ICE TRACTION AIDS-HEAVY DUTY INDUSTRIAL**



**DUE NORTH** 

**SLIP PROTECTION** 

Textured "Diamond Knurling" lining grips footwear and helps keep traction aids in place

40% more natural rubber provides maximum cut resistance and life Specially designed tread pattern offers added traction characteristics, ensuring maximum slip resistance

Fully integrated (molded-in) "military" grade tungsten carbide spikes maximize traction and virtually eliminates spike loss

> **28** tungsten carbide spikes per pair-our top-rated series for extreme applications

Integral retention strap ensures a secure fit in all conditions

28 SPIKES PER PAIR!

Industrial grade sole offers unparalleled grip, maximum durability, and superior operator safety

KTREM

# ICE TRACTION AIDS— HEAVY DUTY INTEGRATED SPIKES

# The solution for extreme winter work environments to give you the utmost confidence on ice and snow.

- Introducing the new Due North Heavy Duty
- 40% more natural rubber provides maximum cut and abrasion resistance while ensuring maximum performance for the life of the product
- Additional features include a built-in retention strap for a more secure fit and molded-in spikes; no additional accessories or replacement spikes are needed
- In comparison to our current industrial grade product, the Heavy Duty has 28 molded-in military grade tungsten carbide spikes

PRODUCT NO.	Old Code	Description	Strap Color	Spike Count	Size	Fits Men's Sizes	Fits Women's Sizes	Case Qty.
V3550570-S	heavydutya-sml	Heavy Duty	Black	28/Pair	Small	3-7	4-8	12
V3550570-M	heavydutya-med	Heavy Duty	Black	28/Pair	Medium	7.5-10	8.5-11	12
V3550570-L	heavydutya-Irg	Heavy Duty	Black	28/Pair	Large	10.5-13	11.5-13	12
V3550570-XL	heavydutya-osd	Heavy Duty	Black	28/Pair	Oversize	*see below	*see below	12

\*Oversized fits sized and Pac boots size 10+ or standard footwear sizes 13.5-15.



**DUE NORTH** 



Tungsten carbide replacement spikes 100 pk. V3550670-O/S



All-purpose carry pouch with belt loop V3550970-O/S



All-purpose retention strap V3550870-O/S





New "Pulse Grip" tread design over a larger surface area provides more traction on all surface 8 (16/pair) strategically placed replaceable spikes

Improved heel fit for better performance

# **16 SPIKES PER PAIR!**

Geometrically designed webbing and improved shape comfortably fit a greater variety of footwear

### **All-Purpose Industrial**

- "Military" grade tungsten carbide "replaceable" spikes maximize traction and performance
- Sixteen tungsten carbide spikes per pair—our top-rated replaceable series for tough applications
- Heel pad features two extra spikes and enlarged heel coverage (versus All Purpose) for increased traction and stability
- Exclusive specially formulated 100% rubber—provides maximizes flexibility and durability in extreme cold conditions
- Specially designed "Pulse Grip" tread pattern offers added traction characteristics maximum slip resistance
- Textured "Diamond Knurling" inner lining grips the footwear, keeping traction aids stable and in place
- Improved heel fit for improved performance
- Geometrically designed strap webbing and improved shape fit a greater variety of footwear these traction aids stay on!
- Features molded-in retention strap attachment points
- For even greater security and fit, Due North offers an optional retention strap (sold separately)
- Industrial grade sole offers unparalleled grip, maximum durability, and superior operator safety
- The all-round solution for tough work environments—best for those who play hard and work harder outdoors.

PRODUCT NO.	Old Code	Description	Strap Color	Spike Count	Size	Fits Men's Sizes	Fits Women's Sizes	Case Qty.
V3550370-S	apindustrial-sml	All Purpose Industrial	Black	16/Pair	Small	4-7	5-8	12
V3550370-M	apindustrial-med	All Purpose Industrial	Black	16/Pair	Medium	7.5-10	8.5-11	12
V3550370-L	apindustrial-lrg	All Purpose Industrial	Black	16/Pair	Large	10.5-14	11.5-13	12
V3550370-XL	apindustrial-osd	All Purpose Industrial	Black	16/Pair	Oversize	*see below	*see below	12
V3550370-2XL	NEW!	All Purpose Industrial	Black	16/Pair	Oversize		ky footwear sizes ndard sizes 15+	12

\*Oversized fits sized and Pac boots size 10+ or standard footwear sizes 13.5-15.

# **ICE TRACTION AIDS-REPLACEABLE SPIKES**



Repositioned Ice Diamond spikes

provide more comfort under the foot and improved traction



**DUE NORTH** 

Improved heel fit for better performance

New "Pulse Grip" tread design

**6 (12/pair)** strategically placed replaceable spikes

over a larger surface area provides more traction on all surfaces

# **12 SPIKES PER PAIR!**

Geometrically designed webbing and improved shape comfortably fit a greater variety of footwear

#### All-Purpose

- "Military" grade tungsten carbide "replaceable" spikes maximize traction and performance
- Twelve tungsten carbide spikes per pair—excellent for general industrial applications
- Exclusive specially formulated 100% rubber—provides maximizes flexibility and durability in extreme cold conditions
- Specially designed "Pulse Grip" tread pattern offers added traction characteristicsmaximum slip resistance
- Textured "Diamond Knurling" inner lining grips the footwear, keeping traction aids stable and in place
- Geometrically designed strap webbing and improved shape fit a greater variety of footwear these traction aids stay on!
- Features molded-in retention strap attachment points
- Industrial grade sole offers unparalleled grip, maximum durability, and superior operator safety
- Easy to put on and take off, as well as easy to adjust
- All-around solutions for most footwear, including boots

PRODUCT NO.	Old Code	Description	Strap Color	Spike Count	Size	Fits Men's Sizes	Fits Women's Sizes	Case Qty.
V3550270-S	allpurposeng-sml	All Purpose	Black	12/Pair	Small	4-7	5-8	12
V3550270-M	allpurposeng-med	All Purpose	Black	12/Pair	Medium	7.5-10	8.5-11	12
V3550270-L	allpurposeng-lrg	All Purpose	Black	12/Pair	Large	10.5-14	11.5-13	12
V3550270-XL	allpurposeng-osd	All Purpose	Black	12/Pair	Oversize	*see below	*see below	12

\*Oversized fits sized and Pac boots size 10+ or standard footwear sizes M 13.5-15, W 10+





**DUE NORTH** 



# **ICE TRACTION AIDS-REPLACEABLE SPIKES**



#### **Light Industrial**



- Exclusive specially formulated 100% rubber—provides maximizes flexibility and durability in extreme cold conditions
- Improved toe-box design enhances fit and function
- Unique support hole on heel strap provides easy adjustment, allowing easy to put-on and take-off characteristics
- Proprietary tread design for added slip resistance
- A low-cost solution for light-duty, intermittent use work environments

PRODUCT NO.	Old Code	Description	Strap Color	Spike Count	Size	Fits Men's Sizes	Fits Women's Sizes	Case Qty.
V3550170-S/M	ltindustrial-s/m	Light Industrial	Black	12/Pair	Small/ Medium	3-7	5-9	12
V3550170-L/XL	ltindustrial-l/xl	Light Industrial	Black	12/Pair	Large/XL	8-14	10+	12





# **ICE TRACTION AIDS-INDUSTRIAL HEEL**





### HTA Easy Flip Heel Traction Aid (Replaceable Spikes)

Ideal for drivers, delivery personnel, or anyone operating machinery where use of a conventional, full coverage traction aid may interfere with driving capabilities The HTA offers a unique design feature that quickly allows the user to flip the traction pad underneath the heel (spike side in) when encountering a walking surface that may be damaged by exposed spikes



# **8 SPIKES PER PAIR!**

- "Military" grade tungsten carbide "replaceable" spikes maximize traction and performance
- Eight tungsten carbide spikes per pair—excellent for general industrial applications
- Exclusive specially formulated 100% rubber—provides maximizes flexibility and durability in extreme cold conditions
- **Patented design** allows the user to easily and quickly flip the traction pad spike side in (facing the heel of the boot), or to simply slip the pad out from underneath the heel completely, resting on the back of the boot. Both functions eliminate spikes from damaging sensitive floor surfaces
- The flip-up position allows the operator to avoid damaging sensitive surfaces by removing the spikes from surface contact
- Ideal for drivers, delivery personnel, and machine operators where use of a full-coverage traction aid may interfere with driving capabilities
- One size fits most

PRODUCT NO.	Old Code	Description	Strap Color	Spike Count	Size	Case Qty.
V3550470-0/S	heeltractionaid	Heel Traction Aid	Black	8/Pair	One size fits most	12

Ideal for drivers, delivery personnel, and machinery operators!

**WARNING:** Do not operate a motor vehicle with the HTA traction aid in active traction mode. The traction aid should always be in the "up" inactive mode position when driving.

## It's as Easy as 1, 2, 3!



Full inactive mode or...



...Easily flip traction padspike side into heel





Flipped HTA traction padspike exposure eliminated





Inactive mode

# **ICE TRACTION AIDS-INDUSTRIAL MID-SOLE**



 Owvik
 MID-SOLE DH

 Defined Heel

Exclusive wedge fit ensures proper fit on defined heel footwear Tungsten carbide spikes help provide stable grip on icy walking surface

Adjustable reflective strap provides added \* visibility and safety Natural rubber and wave design feature provide comfort when in use

- "Military" grade tungsten carbide "replaceable" spikes maximize traction and performance
- Eight tungsten carbide spikes per pair—excellent for general industrial applications
- Exclusive specially formulated 100% rubber—provides maximizes flexibility and durability in extreme cold conditions
- Adjustable strap quickly allows user to swing traction aid from the bottom of the sole (traction mode) to the top center of the foot (inactive mode)
- The flip-up position allows the operator to avoid damaging sensitive surfaces by removing the spikes from surface contact
- Patented wedge shape is designed for "defined" (high) heel footwear, providing a stable, multi-point surface contact area
- Ideal when transitioning from indoor-to-outdoor-to-indoor use as well as for drivers, delivery personnel, and machine operators where use of a full-coverage traction aid may interfere with driving capabilities
- Extra-wide, super-strong, adjustable Hi-Vis Green reflective strap provides added visibility, safety, and durability
- One size fits most

PRODUCT NO.	Old Code	Description	Strap Color	Spike Count	Size	Case Qty.
V3551070-0/S	qwikgripmidsole	Mid-Sole Traction Aid	Hi-Vis Green	8/Pair	One size fits most	12

# **FOR "DEFINED" HEELED FOOTWEAR** ONE SIZE FITS MOST

# **SLIP PROTECTION**

# **ICE TRACTION AIDS-INDUSTRIAL MID-SOLE**



**Qwik Grip** MID-SOLE NDH NON-DEFINED HEEL

Exclusive slim fit and low-profile design ensures proper fit on defined heel footwear

Tungsten carbide spikes help provide stable grip on icy walking surface

> Natural rubber and saddle design feature provide comfort when in use

Adjustable reflective strap provides added visibility and safety

- "Military" grade tungsten carbide "replaceable" spikes maximize traction and performance
- Eight tungsten carbide spikes per pair—excellent for general industrial applications
- Exclusive specially formulated 100% rubber—provides maximizes flexibility and durability in extreme cold conditions
- Specially designed adjustable strap quickly allows user to swing traction aid from the bottom of the sole (traction mode) to the top center of the foot (inactive mode)
- The flip-up position allows the operator to avoid damaging sensitive surfaces by removing the spikes from surface contact
- Exclusive slim, low-profile design ensures **proper fit on "non-defined" (lower heel) footwear**, providing a stable, multi-point surface contact area
- Ideal when transitioning from indoor-to-outdoor-to-indoor use as well as for drivers, delivery personnel, and machine operators where use of a full-coverage traction aid may interfere with driving capabilities
- Extra-wide, super-strong, adjustable Hi-Vis Orange reflective strap provides added visibility, safety, and durability
- One size fits most

PRODUCT NO.	Old Code	Description	Strap Color	Spike Count	Size	Case Qty.
V3551170-0/S	qwikgripmidsole-ndh	Mid-Sole Traction Aid	Hi-Vis Orange	8/Pair	One size fits most	12

# **FOR "NON-DEFINED" HEELED FOOTWEAR** ONE SIZE FITS MOST





Active mode



Inactive mode

# OUR RETAIL SELECTION



V3551270



V3551370



V3550270



V4550150



#### V4550250



V4550350

#### **Slip Protection**

- 100% natural rubber stays strong and retains elasticity in subzero temperatures for maximized durability
- Easy to take on and off
- Easily adjustable
- Replaceable military grade tungsten carbide spikes
- Twelve pair of Ice Diamond spikes per pair
- Molded designs ensure comfortable ergonomically superior fit
- Designed for running, walking or working while keeping your safe and secure

PRODUCT NO.	Old Code	Description	Strap Color	Size	Case Qty.
V3551270		Everyday G3	Black	S/M, L/XL	12
V3551370		Everyday Pro	Black	S/M, L/XL	12
V3550270		All Purpose	Black	S, M, L, XL	12

#### **Rubz Massage**

- Massage relief for tired achy feet
- Massage sore, tight, and tired muscles
- Rubz Ball is great for working sore hands and feet
- Rubz Ball and Rubz Massage Roller help to relieve plantar fasciitis
- Full body massage tool relieves tight and sore muscles in back, arms, shoulders, thighs and calves

PRODUCT NO.	Old Code	Description	Color	Case Qty.
V4550150-0/S		Foot Rubz Ball (English/Spanish package)	Green	24
V4550850-0/S		Foot Rubz Ball (English/French package)	Green	24
V4550250-0/S		Foot Massage Roller (English/Spanish package)	Purple	12
V4550650-0/S		Foot Massage Roller (English/French package)	Purple	12
V4550350-0/S		Full Body Massage Tool (English/French package)	Orange	12







# SAFETY APPAREL



# **Pioneer History**

The Pioneer story began in 1887 in boomtown Vancouver. In the 1890s, the founders grew the business quickly by supplying gear to prospectors arriving from all over North America heading to the famous Alaska/Yukon Klondike Gold Rush. These "sourdough prospectors", as they were called, fought mountainous terrain and the harshest climates in their long journeys to the northern goldfields. They relied heavily on their Pioneer gear to help them get the job done. Pioneer has now been keeping workers safe and comfortable for over 130 years.

Over these years, Pioneer has grown a reputation for designing and building high-quality and innovative protective and safety apparel. Using only the best/safest materials, componentry,



Klondikers carrying supplies ascending the Chilkoot Pass, circa 1898

and by using advanced sewing methods, Pioneer continues to deliver on safety, fit, durability, comfort and value for the professional worker.

Today, Pioneer offers a complete selection of safety clothing including Hi-Vis gear, flame resistant wear, rainwear and much more... plus custom embroidery solutions. SureWerx combines Pioneer with the rest of the SureWerx family of safety brands to offer protection to workers from head to toe.

# Why Choose Pioneer?

- Century long reputation for delivering the highest quality and most durable safety apparel
- Independently tested to meet and exceed all stated safety standards
- Innovative new product solutions based on the voice of the customer
- Unique bar tacking operation on all key seams, pockets, and other areas of stress
- Custom embroidery and silk screen solutions available
- Exclusive StarTech® reflective tape





# TABLE OF CONTENTS

A

	7
SAFETY SASHES & GAITERS13	
HI-VIS SAFETY SHIRTS138–13	9
HI-VIS SAFETY HOODIES 14	0
HI-VIS TRAFFIC SAFETY WEAR14	1
HI-VIS SAFETY RAINWEAR & JACKETS	9
FLAME RESISTANT SAFETY WEAR150–15	1

0

0





# HI-VIS SAFETY APPAREL

# SAFETY, SECURITY, SECOND

www.surewerx.com/usa





V1021840U V1021860U V1021850U

# **HI-VIS SAFETY VESTS**

#### Women's Custom Fit Hi-Vis Safety Vest

- 136U/139U—ANSI/ISEA 107-15 Class 2 Type P and R
- 139PKU—ANSI/ISEA 107-15 Class 1 Type P Type O
- Tricot polyester
- Front zipper closure
- StarTech® reflective tape provides excellent visibility
- ID pocket with pen holders
- Storage, mobile phone, and inside pockets
- Nine total pockets
- Radiophone clip strand
- Tapered waist and flared bottom design made especially for women

PRODUCT NO.	MOD. NO.	Color	Sizes
V1021850U	136U	Hi-Vis Orange	XS-2XL
V1021860U	1390	Hi-Vis Yellow/Green	XS-2XL
V1021840U	139PKU	Pink	XS-2XL

Q



**HI-VIS SAFETY VESTS** 

# **HI-VIS SAFETY VESTS**

#### Woven 150D Multi-Pocket Surveyor Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- 150 denier woven twill polyester
- StarTech® reflective tape provides excellent visibility
- Zipper front closure
- Radiophone pocket on chest
- Two radiophone clip straps
- Four front pockets with brass surveyor tape dispenser grommet
- Five pen pockets
- Seven other all-purpose storage pockets
- 19 pockets in total
- Cooling underarm mesh vents
- Back ruler slot
- Large back pack pouch with zipper access
- D-ring access slot

PRODUCT NO.	MOD. NO.	Color	Sizes
V1010151U	6692AU	Hi-Vis Orange	S-4XL
V1010141U	6693AU	Hi-Vis Yellow/Green	S-4XL



V1010141U V1010151U

### Mesh Surveyor Vest with Padded Collar

- ANSI/ISEA 107-15 Class 2 Type P and R
- Cool 4 oz. (120 GSM) hi-vis polyester mesh
- Durable and highly breathable mesh with mesh pockets
- StarTech<sup>®</sup> reflective tape provides excellent visibility
- Full-length zipper with extra-strong webbing reinforcement
- Padded collar for all-day comfort
- Water bottle/paint can holder at left side of waist
- Large radiophone/cell phone front pocket
- Two radiophone clip straps
- ID pocket with transparent window
- Chest pocket with pen slots
- Two inside full-width pockets with double hook-and-loop closure
- Inside tablet/storage pocket on left side with support strap
- Flap-covered chest pocket
- Lower pockets with flaps and grommets
- 11 pockets in total
- D-ring access slot below left chest pocket
- Full-width back panel with double-layer zip storage pouch

PRODUCT NO.	MOD. NO.	Color	Sizes
V1011150U	6730U	Hi-Vis Orange	S-4XL
V1011160U	67310	Hi-Vis Yellow/Green	S-4XL



V1011160U V1011150U **HI-VIS SAFETY VESTS** 





V1010260U V1010250U



V1010460U V1010450U

# **HI-VIS SAFETY VESTS**

#### 300D Oxford with Mesh Back Surveyor Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- Durable and breathable
- 4 oz polyester mesh back panel for cool ventilation
- Heavy-duty zipper front closure
- StarTech® reflective tape provides excellent visibility
- Radiophone clip straps
- ID pocket with transparent window
- Left chest pocket with pen slots
- Lower pockets with flaps and grommets
- Right and left inside tablet/storage pocket
- 12 pockets total
- D-ring access slot
- Full mesh back panel with double-layer bottom pouch

PRODUCT NO.	MOD. NO.	Color	Sizes
V1010250U	6672U	Hi-Vis Orange	S-4XL
V1010260U	6673U	Hi-Vis Yellow/Green	S-4XL

#### Full Mesh Surveyor Vest with Padded Collar

- ANSI/ISEA 107-15 Class 2 Type P and R
- Cool Hi-Vis mesh vest with solid material pockets
- 4 oz polyester mesh is durable and provides cool ventilation
- StarTech® reflective tape provides excellent visibility
- Heavy duty zipper closure
- Padded collar for all-day comfort
- Radiophone clip straps
- ID pocket with transparent window
- Left chest pocket with pen slots
- Right and left inside tablet/storage pocket
- 12 pockets total
- Full mesh back panel with double-layer bottom pouch
- D-ring access slot

PRODUCT NO.	MOD. NO.	Color	Sizes
V1010450U	6674U	Hi-Vis Orange	S-4XL
V1010460U	6675U	Hi-Vis Yellow/Green	S-4XL







V1021571U, V1021580U V1020251U, V1020161U



V1021061U V1020951U



V1021260U V1021150U V1021170U

# **HI-VIS SAFETY VESTS**

#### Safety Vest

- 131BBAU/134BBAU—ANSI/ISEA 107-15 Class 2 Type P and R
- 135AU/134NAU—ANSI/ISEA 107-15 Class 1 Type O
- Tricot polyester interlock
- Zipper front closure
- StarTech® reflective tape provides excellent visibility
- ID pocket with pen holders
- Three storage pockets
- Eight pockets total
- Mobile phone pocket
- Two radiophone clip strands
- Adjustable 1 size up at sides

PRODUCT NO.	MOD. NO.	Color	Double Sizes
V1020251U	134BBAU	Hi-Vis Orange/Black	S/M-4/5XL
V1020161U	131BBAU	Hi-Vis Yellow/Green/Black	S/M-4/5XL
V1021571U	135AU	Black	S/M-4/5XL
V1021580U	134NAU	Navy	S/M-4/5XL

#### Safety Tear-Away Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- Tricot polyester interlock
- StarTech<sup>®</sup> reflective tape
- ID pocket
- Five-point tear-away
- Four sealed pockets
- Radiophone clip strap
- D-ring access slot
- Adjustable 1 size up at front

PRODUCT NO.	MOD. NO.	Color	Double Sizes
V1020951U	6930U	Hi-Vis Orange	S/M-4/5XL
V1021061U	6931U	Hi-Vis Yellow/Green	S/M-4/5XL

## Zip-Up Snap Break Away Safety Vest

- 6935AU/6936AU—ANSI/ISEA 107-15 Class 2 Type P and R
- 6937AU—ANSI/ISEA 107-15 Class 1 Type O
- 6935AU/6936AU—CSA Z96-15 Class 2 Level 2
- 6937AU—CSA Z96-15 Class 1 Level 2
- Full mesh back panel
- Tear-away snaps on left side of zipper
- Reflective tape X-on back of vest
- StarTech® reflective tape provides excellent visibility
- Tricot polyester interlock front
- Zipper front closure
- Five-point tear-away/snap construction
- Four sealed pockets
- Two radiophone clip straps
- D-ring access slot

PRODUCT NO.	MOD. NO.	Color	Sizes
V1021170U	6937AU	Black	XS-5XL
V1021150U	6935AU	Hi-Vis Orange	XS-5XL
V1021260U	6936AU	Hi-Vis Yellow/Green	XS-5XL







V1060360U V1060450U



V1030560U V1030550U



V10248800 V1024850U

# **HI-VIS SAFETY VESTS**

# Zip-Up Safety Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- Tricot polyester mesh provides cool comfort
- StarTech® reflective tape provides excellent visibility
- Cell phone pocket with flap
- Two lower pockets
- Full front zipper

PRODUCT NO.	MOD. NO.	Color	Sizes
V1060450U	6921U	Hi-Vis Orange	S-4XL
V1060360U	6922U	Hi-Vis Yellow/Green	S-4XL

### Tear Away Mesh Safety Vest

- ANSI 107-15 Class 2 Type P and R
- Polyester mesh design
- StarTech<sup>®</sup> reflective tape provides excellent visibility
- Five-point tear-away
- D-ring access slot
- Adjustable one size up at front

PRODUCT NO.	MOD. NO.	Color	Double Sizes
V1030550U	597U	Hi-Vis Orange	S/M-4/5XL
V1030560U	598U	Hi-Vis Yellow/Green	S/M-4/5XL

## Mesh Multi-Pocket Safety Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- Polyester mesh
- Zipper front closure
- StarTech® reflective tape provides excellent visibility
- Radiophone clip straps on each shoulder
- Four large pockets for items such as keys, phones, cards, wallets, etc.
- ID pocket with transparent window on right chest pocket
- Left chest pocket with pen slots and D-ring below
- Lower pockets with flaps
- Nine pockets total

PRODUCT NO.	MOD. NO.	Color	Sizes
V1024850U	6960U	Hi-Vis Orange	XS-5XL
V1024860U	6961U	Hi-Vis Yellow/Green	XS-5XL



132







V1025260U V1025250U



V1025160U V1025150U



V1060360U V1025060U V1025050U

# **HI-VIS SAFETY VESTS**

### Mesh Multi-Pocket Safety Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- 100% polyester mesh design for cool comfort
- StarTech® reflective tape provides excellent visibility
- Zipper front closure
- Left and right chest mic tab
- Left chest radiophone pocket
- Right chest two-tier, four-division pencil pocket
- Clear ID holder with flap
- Lower inside left tablet/storage pocket with support strap
- Eight pockets total

PRODUCT NO.	MOD. NO.	Color	Sizes
V1025250U	6853U	Hi-Vis Orange	S-5XL
V1025260U	6854U	Hi-Vis Yellow/Green	S-5XL

## **Multi-Pocket Safety Vest**

- ANSI/ISEA 107-15 Class 2 Type P and R
- 100% polyester tricot
- StarTech® reflective tape provides excellent visibility
- Zipper front closure
- Left and right check mic tab
- Left chest radiophone pocket
- Right chest two-tier, four-division pencil pocket
- Clear ID holder with flap
- Lower inside tablet/storage pocket with support strap
- Eight pockets total

PRODUCT NO.	MOD. NO.	Color	Sizes
V1025150U	6855U	Hi-Vis Orange	S-5XL
V1025160U	6856U	Hi-Vis Yellow/Green	S-5XL

## Mesh Safety Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- 100% polyester mesh design for cool comfort
- StarTech® reflective tape provides excellent visibility
- Zipper front closure
- Self-color binding
- Value alternative to safety vests with pockets

PRODUCT NO.	MOD. NO.	Color	Sizes
V1025050U	6844U	Hi-Vis Orange	S-5XL
V1025060U	6845U	Hi-Vis Yellow/Green	S-5XL







V1023560U V1023550U



V1023960U V1023950U



V1030150U-O/S

# **HI-VIS SAFETY VESTS**

### **Polyester Tricot Sleeved Safety Vest**

- ANSI 107-15 Class 3 Type P and R
- Polyester tricot design for ultimate breathability
- Durable nylon front zipper
- StarTech® reflective tape provides excellent visibility
- Contrast binding on entire garment and on pocket openings
- Two radiophone clip straps
- Two chest pockets, two pockets waist pockets

PRODUCT NO.	MOD. NO.	Color	Sizes
V1023550U	6690U	Hi-Vis Orange	S-4XL
V1023560U	6691U	Hi-Vis Yellow/Green	S-4XL

#### **Mesh Short Sleeve Safety Vest**

- ANSI/ISEA 107-15 Class 3 Type P and R
- Breathable polyester mesh
- StarTech® reflective tape provides excellent visibility
- Zipper front closure
- Left chest cell pocket
- Radiophone clip straps on each shoulder

PRODUCT NO.	MOD. NO.	Color	Sizes
V1023950U	6790U	Hi-Vis Orange	S-4XL
V1023960U	6791U	Hi-Vis Yellow/Green	S-4XL

#### **All-Purpose Mesh Vest**

- Polyester mesh
- Yellow PVC reflective tape
- Five-point tear-away
- ID and pen pockets
- Three storage pockets
- Radiophone clip strap
- D-ring access slot

PRODUCT NO.	MOD. NO.	Color	Sizes
V1030150U-0/S	145U	Hi-Vis Orange	One size

# **SAFETY SASHES & GAITERS**

#### **Reflective Belt Vest**

- Makes any plain garment more visible and safer
- Premium 1.5" elastic
- Adjustable elastic waist band and chest straps
- Quick-release waist buckle
- StarTech® reflective tape provides excellent visibility

PRODUCT NO.	MOD. NO.	Color	Sizes
V1041050U	5496U	Hi-Vis Orange	One size
V1041060U	5497U	Hi-Vis Yellow/Green	One size

#### **Reflective Belt Vest Tear Away**

- Makes any plain garment more visible and safer
- Premium 2" elastic
- Adjustable elastic waist band and chest straps fit all
- Quick-release waist buckle
- Four-point break-away
- StarTech® reflective tape provides excellent visibility

PRODUCT NO.	MOD. NO.	Color	Sizes
V1040850U	5591U	Hi-Vis Orange	One size
V1040860U	5592U	Hi-Vis Yellow/Green	One size



V1041060U V1041050U



F

V1040860U V1040850U



**SAFETY SASHES & GARTERS** 



Proving

> V1051160U V1051150U



#### **Birdseye Safety T-Shirt**

• ANSI/ISEA 107-15 Class 2 Type P and R



- StarTech® reflective tape provides excellent visibility
- Rib crew neck
- Chest pocket with hook-and-loop closure
- Radiophone clip strap

PRODUCT NO.	MOD. NO.	Color	Sizes
V1051150U	6990U	Hi-Vis Orange	S-5XL
V1051160U	6991U	Hi-Vis Yellow/Green	S-5XL

### **Birdseye Safety T-Shirt**

- ANSI/ISEA 107-15 Class 2 Type P and R
- 100% moisture-wicking birdseye polyester
- StarTech® reflective tape provides excellent visibility
- Lightweight fabric provides all-day comfort
- Left chest pocket

PRODUCT NO.	MOD. NO.	Color	Sizes
V1054050U	6882U	Hi-Vis Orange	S-4XL
V1054060U	6883U	Hi-Vis Yellow/Green	S-4XL



V1054060U V1054050U

V1052160U

### Cool Pass® T-Shirt

- ANSI/ISEA 107-15 Class 3 Type P and R
- StarTech® Silver Zebra reflective heat-pressed tape
- 100% moisture-wicking birdseye material
- UPF 50+ UV protection
- Lightweight and breathable Cool Pass® fabric
- Stripe around each arm
- Crew neck

PRODUCT NO.	MOD. NO.	Color	Sizes
V1052160U	6901AU	Hi-Vis Yellow/Green	S-4XL



# **HI-VIS SAFETY SHIRTS**

### Birdseye Long-Sleeved Safety Shirt

- ANSI/ISEA 107-15 Class 3 Type P and R
- 100% moisture-wicking birdseye polyester
- StarTech® reflective tape provides excellent visibility
- Lightweight material for all-day comfort
- Left chest pocket
- Two stripes on arms

PRODUCT NO.	MOD. NO.	Color	Sizes
V1054250U	6887U	Hi-Vis Orange	S-4XL
V1054260U	6888U	Hi-Vis Yellow/Green	S-4XL

## Birdseye Long-Sleeved Safety Shirt

- ANSI/ISEA 107-15 Class 3 Type P and R
- 100% moisture-wicking birdseye polyester
- StarTech® reflective tape provides excellent visibility
- Lightweight material for all-day comfort
- Left chest pocket
- One stripe on arms

PRODUCT NO.	MOD. NO.	Color	Sizes
V1051250U	6995U	Hi-Vis Orange	S-4XL
V1051260U	6996U	Hi-Vis Yellow/Green	S-4XL



V1054260U V1054250U



V1051260U V1051250U



V10604610 V1060351U



V10605600 V1060550U

# **HI-VIS SAFETY HOODIES**

## **Polyester Fleece Hoodie**

- ANSI/ISEA 107-15 Class 3 Type P and R
- Premium 10.5 oz (360 GSM) polyester fleece
- Double-stitched StarTech® reflective tape provides excellent visibility

\*

- Detachable drawstring hood
- Elastic cuffs and hem
- Full front reversible zipper
- Two front slash pockets
- Two radiophone clip straps

PRODUCT NO.	MOD. NO.	Color	Sizes
V1060351U	6924AU	Hi-Vis Orange	S-5XL
V1060461U	6925AU	Hi-Vis Yellow/Green	S-5XL

#### **Micro Fleece Zip Hoodie**

- ANSI/ISEA 107-15 Class 3 Type P and R
- 7 oz (240 GSM) micro fleece
- Four-way comfort stretch
- StarTech® reflective tape provides excellent visibility
- Full front zipper
- Detachable drawstring hood
- Elastic cuffs and hem
- Two front slash pockets
- Two radiophone clip straps

PRODUCT NO.	MOD. NO.	Color	Sizes
V1060550U	6940U	Hi-Vis Orange	S-5XL
V1060560U	6941U	Hi-Vis Yellow/Green	S-5XL



**HI-VIS SAFETY HOODIES** 

# **HI-VIS TRAFFIC SAFETY WEAR**

## **Traffic Safety Coverall**

- ANSI/ISEA 107-15 Class 3 Type P and R
- StarTech<sup>®</sup> reflective tape provides excellent visibility
- Polyester knit
- Mesh ventilation panels on upper arms and legs
- Two-way brass zipper
- Two radiophone clip straps
- Two-way 28" leg zippers for ventilation and easy boot access
- Adjustable snap wrists
- Seven storage pockets: two rear, two chest, two side, one tool
- Hammer loop
- Tw
- Ela

vo pass-through pockets lastic waist			
PRODUCT NO.	MOD. NO.	Color	Sizes
V1070160U	5999AU	Hi-Vis Yellow/Green	XS-5XL

#### **Traffic Safety Pant**

- ANSI/ISEA 107-15 Class E Supplemental Type
- StarTech® reflective tape provides excellent visibility
- Polyester knit
- Mesh ventilation panels on upper legs
- Brass zipper fly access

**Mesh Safety Pants** 

PRODUCT NO.

V1070760U

- Two-way 28" leg zippers for ventilation and easy boot access
- Five storage pockets: two side, two back, one tool

• ANSI/ISEA 107-15 Class E, Supplemental Type

• StarTech® reflective tape provides excellent visibility

MOD. NO.

5670U

• 100% polyester lightweight mesh • Two pass-through pockets • Drawstring waist

• Class 3 when paired with ANSI Class 2 or Class 3 vest, shirt or jacket

• Elastic waist with drawstring

PRODUCT NO.	MOD. NO.	Color	Sizes
V1070360U	5999PU	Hi-Vis Yellow/Green	XS-4XL

Color

Hi-Vis Yellow/Green



Mesh ventilated

28"

Mesh ventilated upper legs

28"

28" leg

zippers

28" leg

zippers

**Double Sizes** 

2XS/XS-4/5XL





V1070360U



#### www.surewerx.com/usa





V3010460U

# **RAINWEAR**

### **Three-Piece Repel Rainwear**

- Welded seams for waterproof protection
- .35mm PVC/polyester material
- 100% waterproof and windproof
- Includes jacket, detachable hood, and bib pant

part in

PIONEER

#### Jacket features:

- Vented back and underarms
- Two large front cargo pockets
- Zipper plus snap storm placket
- Corduroy collar
- Bib pant features:
- Adjustable waist and suspenders
- Snap fly access

PRODUCT NO.	MOD. NO.	Color	Sizes
V3010460U	577AU	Yellow	S-5XL



#### **HI-VIS SAFETY RAINWEAR**

#### 150D Oxford Poly/PVC Waterproof Suit

- ANSI/ISEA 107-15 Class 3 Type P and R
- Folds into a storage pouch
- 100% waterproof 150 denier Hi-Vis oxford polyester with PU backing
- StarTech® reflective tape provides excellent visibility
- Taped and heat-sealed seams
- Full back vent for breathability

#### Jacket features:

- Two lower flap pockets
- Drawstring with toggle on hem
- Half mesh-lined back
- Full front zipper
- Hood folds into collar

#### Bib Pant features:

- Elastic suspenders
- Metal buckles
- Snaps on leg hems

PRODUCT NO.	MOD. NO.	Color	Sizes	
V1080350U	5618U	Hi-Vis Orange	S-4XL	
V1080360U	5619U	Hi-Vis Yellow/Green	S-4XL	

#### Lightweight Waterproof Suit

- ANSI/ISEA 107-15 Class 1/Class 1/Class E Type O/Supplemental Type
- Two pieces: hooded jacket and bib pant, fold into storage pouch
- StarTech® reflective tape provides excellent visibility
- 100% waterproof polyester/PVC
- Taped and heat-sealed seams

#### Jacket features:

- Back vents
- Adjustable hem
- Two large front cargo pockets
- Hood folds and zips into collar
- Full front zipper
- Drawstring with toggle on hem.

#### Bib Pant features:

- High-quality black elastic suspenders with non-corrosive plastic buckles
- Snap on hems to fit snug to boots.

PRODUCT NO.	MOD. NO.	Color	Sizes
V1080150U	5598U	Hi-Vis Orange	S-4XL
V1080160U	5599U	Hi-Vis Yellow/Green	S-4XL







V1080360U V1080350U





V1080160U V1080150U



#### **HI-VIS SAFETY RAINWEAR**

#### **Ripstop Waterproof Safety Jacket**

- ANSI/ISEA 107-15 Class 3 Type P and R
- 100% waterproof and windproof
- StarTech® reflective tape provides excellent visibility
- Double-stitched and heat-sealed seams
- Abrasion, puncture, and tear resistant
- Front and back ventilation panels
- Fully mesh and taffeta lined back
- Fleece-lined collar with chin guard
- Two lower zip pockets, two lower inside pockets, and concealed zip cell phone pocket
- Two radiophone clip straps
- Full front two-way zipper with snap placket
- Elastic wrists with hook-and-loop closure
- 5400HU/5401HU (hood sold separately)

PRODUCT NO.	MOD. NO.	Color	Sizes
V1200251U	5400AU	Hi-Vis Orange	S-4XL
V1200261U	5401AU	Hi-Vis Yellow/Green	S-4XL

#### Hood for 300D Ripstop Waterproof Safety Jacket

- 300 denier durable ripstop polyester, PU coated
- Snap closure with drawstring
- Snaps for connecting to 300D ripstop jackets

PRODUCT NO.	MOD. NO.	Color	Sizes
V1200350U	5400HU	Hi-Vis Orange	One size
V1200360U	5401HU	Hi-Vis Yellow/Green	One size

#### **300D Ripstop Waterproof Safety Bib Pant**

- ANSI/ISEA 107-15 Class E, Supplemental Type
- 300 denier PU-coated ripstop polyester
- StarTech® reflective tape provides excellent visibility
- Double-stitched and heat-sealed seams
- Abrasion, puncture, and tear resistant
- 12" leg zippers with hook-and-loop plackets/adjustor straps
- Zippered closure inside bib pocket
- Zippered fly access
- Fully lined

PRODUCT NO.	MOD. NO.	Color	Sizes
V1200451U	5404AU	Hi-Vis Orange	S-4XL
V1200461U	5405AU	Hi-Vis Yellow/Green	S-4XL



V1200261U V1200251U





V1200461U V1200451U





V1081360U V1081350U V1082360U V1081350U



V1120661U V1120651U

#### **HI-VIS SAFETY RAINWEAR**

#### Hi-Vis Safety Jacket and Hi-Vis Safety Bib Pants

#### Jacket:

- 100% waterproof 300 Denier Oxford polyester w/ PU coating
- ANSI 107-15 Class 3 Type P and R
- StarTech™ reflective tape
- Taped and heat sealed seams
- Superior tear- and abrasion-resistant fabric
- Liberal fit and full back vent for working comfort
- Folds into zippered storage pouch
- Two lower flap pockets
- Half mesh lined back
- Full front zipper
- Hood folds into collar

#### Bib Pants:

- 100% waterproof 300 Denier oxford polyester w/ PU coating
- ANSI 107-15 Class E Supplemental Type
- StarTech™ reflective tape
- Taped and heat sealed seams
- Superior tear- and abrasion-resistant fabric
- Liberal fit for working comfort
- Elastic suspenders
- High-quality plastic buckles
- Two snap adjustment on leg hems to fit snug to boots
- Two-sided waist adjustment for better fit around waist

PRODUCT NO.	MOD. NO.	Color	Sizes
V1081350U	5626U	Hi-Vis Orange Jacket	S-4XL
V1081360U	5628U	Hi-Vis Yellow Jacket	S-4XL
V1082350U	56270	Hi-Vis Orange Pants	S-4XL
V1082360U	56290	Hi-Vis Yellow Pants	S-4XL

#### **HI-VIS INSULATED RAINWEAR**

#### Hi-Vis 100% Waterproof Quilted Bib Pant

- ANSI/ISEA 107-15 Class E, Supplemental Type
- Double-stitched StarTech® reflective tape provides excellent visibility
- 300 denier PU-coated oxford polyester with 5.3 oz (180 GSM)
- warm quilted polyester lining100% waterproof and windproof
- 20" boot access two-way leg zippers with snap storm covers
- Double-stitched, taped and heat-sealed seams
- Two-way zipper with brass snap storm placket
- Premium adjustable elastic suspenders with quick-release clips
- Elastic waist
- Two front slash cargo pockets
- Sealed inside chest pocket with pen slot
- Outside chest pocket with flap

PRODUCT NO.	MOD. NO.	Color	Sizes
V1120651U	5040BBU	Hi-Vis Orange	S-4XL
V1120661U	5041BBU	Hi-Vis Yellow/Green	S-4XL



PIONEE

#### **HI-VIS INSULATED RAINWEAR**

#### Hi-Vis Waterproof 2-in-1 Bomber Jacket

- Outer jacket ANSI/ISEA 107-15 Class 3 Type P and R
- PU-coated oxford polyester shell
- 100% windproof and waterproof
- StarTech® reflective tape provides excellent visibility
- Removable inner fleece liner
- Embroidery access zipper on the inside
- Detachable snap hood with pouch to conceal hood
- Comfort collar with fleece lining
- Elastic ribbed cuffs and waist
- Full front zipper
- Two radiophone clip straps
- Two large front zippered pockets
- One cell phone pocket
- Inside chest pocket

9000

• Black bottom to conceal soiling

PRODUCT NO.	MOD. NO.	Color	Sizes
V1130460U	5209U	Hi-Vis Yellow/Green	S-4XL



\*\*\*

V1130460U

0

PIONEER



#### ww.surewer om/usa





V1210170U V1210160U

#### **HEATED OUTERWEAR**

#### Heated Safety Nano Bomber Jacket

- ANSI/ISEA 107-15 Class 3 Type P and R (class 1 for black)
- Three-panel Nano Technology 4 levels of heat settings LED switch for on/off and heat levels • Comes with USB port to connect to rechargeable power bank
- (power bank not included; must be purchased separately)
- 300 denier Oxford polyester, PU coated shell fabric
- 120GSM insulated with taffeta lining
- 100% waterproof and windproof •
- Double-stitched and heat sealed seams
- StarTech<sup>®</sup> reflective tape .
- Full front waterproof zipper .
- Two lower slash pockets with waterproof zip, 1 lower inside zip pockets, laser chest zip pocket
- Two radiophone clip straps •
- Three-piece lined detachable hood •
- Fleece lined collar .
- Elastic rib wrists .
- Machine washable
- Sizes: S-4XL

PRODUCT NO.	MOD. NO.	Color	Sizes
V1210160U	5408AU	Hi-Vis Yellow/Green	S-4XL
V1210170U	5409AU	Hi-Vis Black	S-4XL

Dower Donk	HOURS OF KEEPING WARM*				
Power Bank Capacity		ings			
(mAh)	Comfort 38°C/100.4°F	Cozy 43°C/109.4°F	Warm 48°C/118.4°F	Hot 53°C/127.4°F	
5,000	6	5	4	3	
10,000	9	8	7	6	
15,000	12	11	10	9	
20,000	15	14	13	12	
25,000	18	17	16	15	

\*Based on 25,000 mAh Power Bank. Power bank not included.

The above chart is a guideline. Your results can vary based on the age and quality of the power bank used, outside temperatures and your own body heat. Test your power pack to ensure the length of performance with this jacket.

#### WARNING: Cancer-www.P65Warnings.ca.gov











IIP TO

18 HOURS\*





**4 HEAT LEVELS** 

CARBON NANOTUBE MULTI-HEATING TECHNOLOGY (CNT) ZONES

CONNECTS TO **USB POWER BANK** 

WATERPROOF & WINDPROOF

MACHINE WASHABLE



#### **HI-VIS OUTERWEAR**

- Hi-Vis Safety Insulated Bomber Jacket

  PU-coated oxford polyester shell
- Meets ANSI 107-15 Class 3 Type P and R
- 160 GSM quilted poly insulation
- 100% windproof and waterproof
- StarTech® reflective tape provides excellent visibility
- Embroidery access zipper on the inside
- Detachable snap hood with pouch to conceal hood
- Comfort collar with fleece lining
- Elastic ribbed cuffs and waist
- Full front zipper
- Two radiophone clip straps
- Two large front zippered pockets
- One cell phone pocket
- Inside chest pocket
- Black bottom to conceal soiling

PRODUCT NO.	MOD. NO.	Color	Sizes
V1130560U	5208AU	Hi-Vis Yellow	S-4XL



\*

Ť

V1130560U

## PIONEER



V2540310, V254031T V2540350, V254035T



V2570450U V2570470U

#### **FLAME RESISTANT**

## **FR-TECH**<sup>™</sup>

#### Flame Resistant Tech Premium Soft Coveralls

- ANSI/ISEA 107-15 Class 1 Type O
- FR-Tech™ 88% premium cotton blended with 12% high-tenacity nylon, 7 oz (240 GSM)
- Material and all components meet CGSB 155.20-2017 and NFPA 2112-2018 certified to UL
- Thermal Protective Performance (TPP) Value 9
- 7702/7702T—CSA Z96-15 Class 3 Level 2 and Class 3 Level FR
- 7704/7704T—CSA Z96-15 Class 1 Level 2 and Class 1 Level FR
- Meets ASTM F1506-2018, NFPA 70E-18 and CSA Z462-18
- ATPV 10 cal/cm<sup>2</sup> (Arc Thermal Protective Value)
- ARC 2 Arc Rating Category
- Double-stitched StarTech® FR reflective tape provides excellent visibility
- Sewn with aramid inherently FR thread
- Flame resistance guaranteed for the life of the garment
- Radiophone clip strap
- Two-way FR brass zipper
- Seven storage pockets: two back, two chest, two side, one tool
- Two pass-through pockets
- Adjustable wrists and ankles
- Superior flash fire and arc flash protection

PRODUCT NO.	MOD. NO.	Color	Waist Sizes
V2540350	7702	Orange	36-60
V254035T	7702T	Orange	40-60 Tall
V2540310	7704	Blue	36-60
V254031T	7704T	Blue	40-60 Tall

## FLAME-GARD

#### Flame Resistant Zip-Style Heavyweight Cotton Safety Hoodie

- ANSI/ISEA 107-15 Class 1 Type O
- CSA Z96-15 Class 1 Level 2 and Class 1 Level FR
- 100% FR treated preshrunk cotton, 12 oz (400 GSM)
- Material and all components meet CGSB 155.20-2017 and NFPA 2112-2018 certified to UL
- Thermal Protective Performance (TPP) value: 12.6 cal/cm<sup>2</sup>
- Meets ASTM F1506-10a, NFPA 70E and CSA Z462-15
- ATPV 23 cal/cm<sup>2</sup> (Arc Thermal Protective Value)
- ARC 2 Arc Rating Category
- Double-stitched StarTech® FR reflective tape X on the back provides excellent visibility
- Sewn with inherently FR thread
- Two front slash pockets
- FR brass non-locking zipper
- Tough double-stitched seams
- Liberal sizing
- Detachable snap hood

PRODUCT NO.	MOD. NO.	Color	Sizes
V2570450U	338SFU	Orange	S-5XL
V2570470U	337SFU	Black	S-5XL



PIONEE

#### **FLAME RESISTANT**




#### Flame Resistant Hi-Vis Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- FR treated polyester mesh
- Meets EN ISO 14116 Index 1
- Must be worn over an FR sleeved garment
- Five-point tear-away
- StarTech® FR reflective tape provides excellent visibility
- D-ring access slot
- Adjustable one size up at front

PRODUCT NO.	MOD. NO.	Color	Double Sizes
V2510850U	6914AU	Hi-Vis Orange	S/M-4/5XL
V2510860U	6916AU	Hi-Vis Yellow/Green	S/M-4/5XL



V2510860U V2510850U

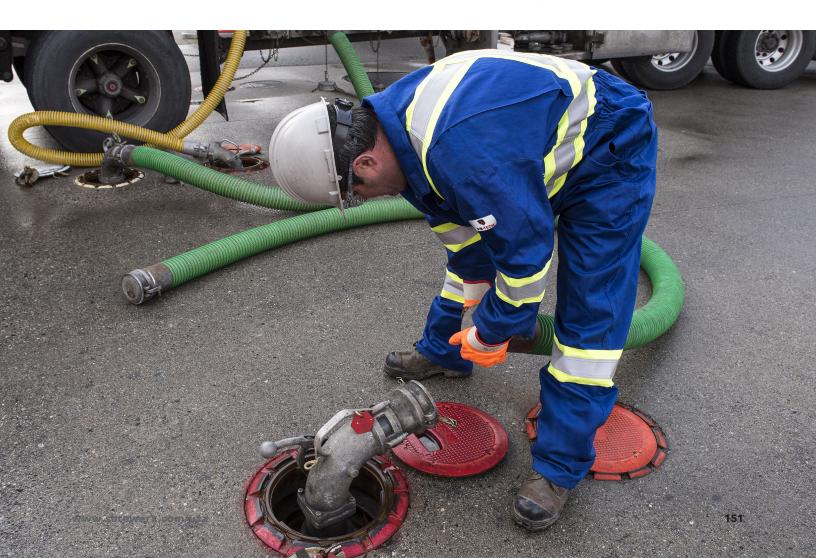

**FLAME-RESISTANT APPAREL** 



CLASS 1-TYPE O

#### ANSI/ISEA 107-15 AMERICAN NATIONAL STANDARD FOR HIGH-VISIBILITY SAFETY APPAREL AND ACCESSORIES

What is **ANSI/ISEA 107-15** American National Standard for High Visibility Safety Apparel and Accessories?

The latest ANSI/ISEA 107-15 version consolidates the requirements of ANSI/ISEA 107-2010 and ANSI/ISEA 207, American National Standard for High-Visibility Public Safety Vests, in an effort to establish a single comprehensive document that considers all occupational tasks. The standard continues to present three performance classes of garments based on the amount of visible materials and design attributes incorporated into the final configuration, and identifies garment types based on expected use settings and work activities being performed. These are designated as off-road (type O), roadway and temporary traffic control (type R), or public safety activities (type P). For a detailed explanation of these standards, visit www.safetyequipment.org/ansiisea-107-2015.

Listed below is a simplified explanation of the ANSI/ISEA 107-15 classes of garments:

#### CLASS 1–TYPE O (Off Road)

Class 1 safety apparel are for workers whose jobs puts them at the lowest risk level. These would be for environments where traffic is traveling at or below 25 mph and work is taking place at a safe distance from a roadway. An example of this type of work would be sidewalk repair in a small residential neighborhood.

According to ANSI, in order for a vest to qualify as a Class 1 Type O safety apparel, it must have 217 square inches of background material in safety yellow or safety orange and have a minimum of 155 square inches of reflective tape. These reflective stripes must go around the middle of the vest as well as over the shoulder. These ANSI safety vests are designed to cover the torso only and do not require sleeves.

As defined by ANSI, "Performance Class 1 provides the minimum amount of high-visibility materials required to differentiate the wearer visually from non-complex work environments, in scenarios in which the struck-by hazards will not be approaching at roadway speeds, and therefore operative detection and identification distances."

- Basic harness or safety tape over the shoulders and encircling the waist.
- Suitable in less complex work areas where workers are separated from car and truck traffic.
- Example: Class 1 = Class 1 tape configuration + non-retroreflective background material.
- Pioneer model #135AU (V1021571U) Hi-Vis Safety Vest and Pioneer model #337SFU (V2570470U) Flame Resistant Zip Style Heavyweight Cotton Safety Hoodie are both Class 1—Type O HVSA.

#### ANSI/ISEA 107-15 AMERICAN NATIONAL STANDARD FOR HIGH-VISIBILITY SAFETY APPAREL AND ACCESSORIES

#### CLASS 2–TYPE R and/or P (Roadway, Temporary Traffic Control, and/or Public Safety

Class 2 safety apparel is intended for working environments that pose a greater risk than Class 1. This can include workers who are on a roadway where traffic is moving under 50 mph. This apparel is larger than their Class 1 counterparts because they require more high visibility and reflective areas to be present. A Class 2 vest, for example, must have at least 775 square inches of safety yellow or safety orange background material and 201 square inches of reflective striping. Class 2 apparel are commonly worn by survey crews, airport baggage handlers, and school crossing guards.

- Full coverage of the upper torso including front, back, sides and over the shoulders.
- The background material must be high visibility.
- For use in more complex or low-light work areas requiring greater visibility.
- Example: Class 2 = Class 2 tape configuration + retroreflective background material.
- Pioneer model #6990U (V1051150U) Birdseye Safety T-Shirt is a Class 2—Type R and P garments.

#### CLASS 3–TYPE R and/or P (Roadway, Temporary Traffic Control, and/or Public Safety

Class 3 safety apparel is reserved for people working in the most dangerous environments where visibility is the highest priority. This includes roadways where traffic is traveling in excess of 50 mph, but it can also apply to emergency personnel or tow truck operators working in extreme weather conditions where visibility is at a minimum.

Class 3 ANSI approved safety apparel requires the most background fabric and reflective striping. The standard includes 1,240 square inches of safety yellow or safety orange background with 310 square inches of reflective striping.

As defined by ANSI, "Performance Class 3 can offer greater visibility to the wearer in both complex backgrounds and through a full range of body movements by mandatory placement of background, retroreflective and combined-performance materials on sleeves and pant legs (if present). Regardless of the area of materials used, a sleeveless garment or vest alone shall not be considered Performance Class 3."

- A Class 2 garment combined with arm and leg bands.
- The background material must be high visibility to the standard.
- Hi-Vis coveralls meet this standard; safety jackets (Class 2) and pants (Class E) can be worn combined, or arm/leg bands can be added to Class 2 garments, to attain Class 3.
- Suitable for use in complex work areas where low light, fast-moving traffic and inclement weather are safety factors.
- Example: Class 3 = Class 3 tape configuration + retroreflective background material
- Pioneer model #6690U (V1023550U) Hi-Vis Safety Vest With Sleeves, Pioneer model #5999AU (V1070160U) Hi-Vis Traffic Safety Coverall are all Class 3—Type R and P garments.



CLASS 2-TYPE R AND/OR P



CLASS 3-TYPE R AND/OR P

**HI-VIS SAFETY APPAREL** 







SUPPLEMENTAL CLASS E

#### ANSI/ISEA 107-15 AMERICAN NATIONAL STANDARD FOR HIGH-VISIBILITY SAFETY APPAREL AND ACCESSORIES

#### SUPPLEMENTAL CLASS E

ANSI Supplemental Class E applies to Hi-Vis pants, bib overalls, shorts, and gaiters. Alone, these garments are not ANSI compliant. When combined with a Class 2 or Class 3 garment, the combination satisfies Class 3 requirements. This classification remains the same under the ANSI/ISEA 107-2015 standard.

ANSI designates "pants, bib overalls, shorts, and gaiters" as Class E.

- Class E garments must always be worn in combination with other items to meet HVSA PPE requirements.
- Class E items worn in combination with Performance Class 2 or Class 3 items will achieve an overall classification of Performance Class 3.
- Pioneer model #5404AU (V1200451U) Hi-Vis 300D Ripstop Waterproof Safety Bib Pant and Pioneer model #5999PU (V1070360U) Hi-Vis Traffic Safety Pant are both Class E HVSA.

Safety officials in your region determine the appropriate class wear for specific job sites. Hazardous risk assessment should be performed by a qualified individual to determine the applicable high visibility classification.





#### SIZING CHART Body Measurements (not garment measurements)

#### Jackets, Coveralls, Overalls

Jackets, Cove	ackets, Coverans, Overans																				
	XS		5	Ν	Л	I	_	Х	Ľ	22	KL	32	KL	4)	KL	52	KL	6)	KL	7)	XL
Size	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72
Chest	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72
Waist	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66
Arms	32	3	3	3	4	3	5	3	6	3	7	3	8	3	9	4	0	4	.1	4	12
Нір	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72

Pants (overalls	Pants (overalls are sized based on chest measurements)																				
	XS	XS S M L XL 2XL 3XL 4XL											52	5XL 6XL		7XL					
Size	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66
Waist	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66
Нір	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72
Inseam	30.5	3	1	31	.5	3	2	32	2.5	3	3	33	3.5	3	4	34	1.5	3	5	35	5.5

Shirts (select size by	v neck for a	closed coll	ar shirts, b	y chest fo	r open coll	lar shirts)								
S         M         L         XL         2XL         3XL         4XL         5XL         6XL         7XL														
Neck	14-14.5 15-15.5 16-16.5 17-7.5 18-18.5 19-19.5 20-20.5 21-21.5 22-22.5 23-23.5													
Chest	34	38	42	46	50	54	58	62	66	70				
Sleeve	33.5	34	34.5	35	35.5	36	36.5	37	37.5	38				

Women's Garment Sizing													
	XS	S	М	L	XL	2XL							
Chest	32	34	36	39	42	45							
Waist	24	26	28	31	34	37							
Arms	29	30	31	32	33	34							
Нір	35	37	39	42	45	48							
Inseam	27	28	29	30	31	32							
All mossuror	ments in inches	·			•								

All measurements in inches.

Talls in Coveralls are 2 inches longer in the torso and 1 inch longer in the sleeves and legs.

#### **Measurement Directions:**

- Neck: Measure around the base of your neck, round up to the next half-inch.
- Chest: Measure around your chest, under the arms and across the shoulder blades, over a shirt if stomach is larger than chest; choose the larger size.
- Waist: Measure around your waist at the level you normally wear your pants, over a shirt.
- Hip: Standing with feet together, measure around the widest part of your hips, parallel to the floor.
- Inseam: Measure a good-fitting pair of pants along the inseam, from crotch seam to bottom edge of cuff.
- Sleeve: Bend arm and place fist on hip. Measure from center back of your neck, across shoulder and down arm to elbow and then to your wrist. This is your sleeve length.

For working garments, measure liberally to find your size, as you need freedom of movement.

## STAR TECH®

STARTECH® reflective tape is exclusive to Pioneer safety products. It is designed and tested to far exceed the ANSI/ISEA 107-15 high-visibility safety apparel reflective tape standard.



StarTech® reflective tape has been independently tested to meet:

- ANSI 107-15 American National Standards Institute
- EN ISO 20471 High-Visibility Standard Level 2 high-visibility safety apparel and accessories

StarTech<sup>®</sup> FR tape is made of FR cotton or aramid material as backing and has been independent lab-tested to meet:

- CGSB 155.20-2017 (Heat-Resistant Test)
- NFPA 2112-2018 Standard on Flame-Resistant Garments for Protection of Industrial Personnel against short duration thermal exposure from fire

The many standards for reflective tapes all require passing a battery of tests that simulate working conditions.

These include measuring the retroreflective performance of StarTech<sup>®</sup> tape after being subjected to abrasion, multiple flexing, cold temperatures, variable temperatures, multiple washings, wet conditions, and, for the FR version, its heat resistance properties as well. Due to its premium design and quality, StarTech<sup>®</sup> tape not only meets but exceeds all of these standards!



#### NFPA (National Fire Protection Association) 2112-2018— Standard on Flame-Resistant Garments for Protection of Industrial Personnel Against Flash Fire

- NFPA 2112-2018 requires 3rd party certification through UL.
- Tests performed under NFPA 2112:
  - 1. Heat transfer performance-predict burn injury (2nd or 3rd degree burn).
  - 2. Flame resistance—ASTM D6413 as received and after 100 wash cycles. Tested for 3 secs.
  - 3. Thermal shrinkage resistance/Heat resistance test—Oven test at 260°C.
  - Manikin testing—ASTM F1930—Manikin has sensors and is subjected to 84kW/m<sup>2</sup> for flame for 3 secs. to verify if 2nd or 3rd degree burns are recorded.
  - 5. Thread melting resistance—260°C of heat is applied to verify if thread melts.
  - 6. Other tests included: label legibility, fabric weight, tensile strength, tear strength, material burst strength, laundering shrinkage, colorfastness, seam efficiency.

#### **Electric Arc Standards**

#### Test Method:

ASTM F1506-2018—Standard Performance Specification for Flame Resistant and Arc Rated Textile Materials for Wearing Apparel for Use by Electrical Workers Exposed to Momentary Electric Arc and Related Thermal Hazards.

#### Standards:

NFPA 70E-2018—Standard for Electrical Safety in the Workplace.

#### What is ARC Flash?

When an electric current passes through air between underground conductors or between underground conductors and grounded conductors, temperatures can reach 20,000°C (35,000°F).

Exposure to these extreme temperatures burns the skin directly and ignites clothing, which adds to the burn injury.

The majority of hospital admissions due to electric accidents are from arc flash burns, not from shocks.

#### ASTM F1506-2018

- Both NFPA 70E and CSA Z462 define the following categories for ARC rated clothing
- ATPV (Arc thermal protective value) point at which 2nd degree burn is registered on the sensor and fabric is still intact
- EbT (Break-open threshold) point at which 2nd degree burn is registered on the sensor and fabric has broken/formed a hole
- Minimum ARC rating required 4 Cal/cm<sup>2</sup>
- $\blacksquare ARC 1 4 Cal/cm<sup>2</sup> to 7.9 Cal/cm<sup>2</sup>$
- ARC 2—8 Cal/cm<sup>2</sup> to 24.9 Cal/cm<sup>2</sup>
- ARC 3—25 Cal/cm<sup>2</sup> to 39.9 Cal/cm<sup>2</sup>
- ARC 4—40 Cal/cm<sup>2</sup> and up.

Tests in this standards go way beyond testing for ARC rating:

- Breaking load test—Grab test
- Tear resistance
- Seam slippage
- Colorfastness—Laundering/Dry Cleaning—three cycles of washing
- Dimensional Change—Max 3%
- Flammability—Char length needs to be below 150mm
- Before and after 25 washes, Bursting strength, Arc Rating

#### WARRANTY

#### **Garment and Safety Gear**

Pioneer warrants all garments to be free of defects in materials and workmanship under the normal use for which the product is intended. Normally, a garment defect of manufacture will show up in the first two months of use.

This warranty is limited to product failure as a result of seam separation, broken snaps or zippers, material delaminating, or any defect in material or workmanship that affects the performance of the garment.

Excluded from this warranty are products that have been affected by cuts or punctures, disfigured from continued wear or use, and products that have been exposed to solvents or excessive heat which may degrade their performance and garments that have not been maintained as per wash care instructions on the garment.

Warranty claims will only be provided for those products that have been made available for inspection by Pioneer. Any warranty claim on garments that have been purchased over 60 days ago will have to be accompanied by pictures and/ or defective garment itself for inspection. To maintain our health and safety standards, all products returned for inspection must be free of all removable debris. Any products returned that do not meet the above conditions will be returned to the customer at their expense.

Pioneer shall not be liable for indirect, special, incidental, or consequential damage or penalties and does not assume liability of purchaser or others for injury to persons or property.

For a warranty claim on a Pioneer garment, please contact your local sales or customer service representative.

## PEAKWORKS

# 





## FALL PROTECTION

### TABLE OF CONTENTS

田白

HARNESSES AND BELTS	165–183
SELF-RETRACTING LIFELINES	184–194
LANYARDS	195–198
VERTICAL LIFELINES AND ROPE GRABS	. 199–201
ANCHORAGE CONNECTORS	. 202–206
TANK TROLLEYS	
КІТЅ	. 208–220
HARDWARE AND ACCESSORIES	
LADDER SAFETY SYSTEM	. 222–229
EMERGENCY DESCENT SYSTEMS	. 230–231
ENGINEERED SYSTEMS	232
TOOL TETHERING SYSTEMS	. 233–238
STANDARDS AND REGULATIONS	



# PEACE OF MIND

#### PeakWorks Knows Fall Protection

From its inception in 2008, PeakWorks has been passionate about providing workers peace of mind when working at heights. The PeakWorks founders, with over 50 years of fall protection experience between them, set out to build a company that not only offered an industry-leading product line, but also provided their customers with value-added services supplying real solutions for both workers and the companies employing them. Today, as an integral part of our family of brands, we embrace those same principles. We know that the best fall protection is to eliminate the fall hazard in the first place. However, we also know that life doesn't always work that way. Our single goal, then, remains very simple: to ensure the best possible outcome when the unexpected occurs.

#### PeakWorks Embraces Industry Standards

Our in-house fall protection experts are driven to provide the best possible products and systems to ensure maximum worker safety. Like you, we live and work in North America, and we are intimately knowledgeable about the strict regulations imposed in this country, which has the highest standards in the world. In fact, we are so dedicated to the advancement of worker safety that our fall protection experts are active members of both the CSA and ANSI standards committees. Not only do we adhere to these standards, we help to develop them!

#### PeakWorks Thrives on Problem Solving

PeakWorks is all about solving problems for workers at height. Our team of experts is available to consult on applications, hazard analysis training, recertification of products and much more. If you need help, we are just a phone call away!

#### PeakWorks Offers Uncompromising Value

Great news! Not only have we developed a world-class fall protection program, we have also made every effort to ensure that it is delivered at the best value to you, the customer. We have accomplished this without compromising product quality–your safety remains our primary objective. So give us a call and let us know how PeakWorks can not only exceed your safety expectations but potentially lower your overall fall protection costs at the same time.

#### **ANSI** Certification

Products that are certified to the ANSI standard is much different than products that meets or exceed ANSI standard. Certified to ANSI means that the product has been tested and certified by a third party testing facility that have meet all the requirements of ISO 17025. The products undergo all the testing that is set forth by the ANSI standard to qualify as certified product. This gives the user an extra level of assurance that the product will perform as designed. On the other hand, if a product has the term "Meets or exceeds" on the labeling or instruction manual, it simply means that the manufacturer has tested the products internally usually without a 3rd party verification. It's important that you as the user of the equipment understand these difference so that you can make an informed decision on the products you are using or specifying to use in the field.



# FALL PROTECTION

#### FALL PROTECTION DEFINED

#### What is Fall Protection?

Fall Protection refers to a series of regulated products or systems designed to protect workers from the risk of falls when working at height.

#### **Types of Fall Protection**

There are three basic types of fall protection available on the market:

**Fall Restraint**–Comprised of products or equipment which prevent a free fall from happening in the first place. The fall restraint system is designed to prevent a worker from ever reaching the edge or drop-off point when working at heights. Common examples: Guard Rails or Restraint Lanyards connected to Full Body Harnesses that are shorter in length than the distance from the Anchor Point to the Drop-Off Point.

**Fall Arrest**–Comprised of products, equipment or systems which stop a free fall once it occurs. These products are carefully designed and tested to stop a falling worker with minimal risk of injury. Common examples: Full Body Harnesses connected to Shock Absorbing Lanyards, or Self-Retracting Lifelines that are connected to an approved Anchor Point.

**Work Positioning**–Comprised of products or equipment which support or suspend a worker in order to allow the worker to be positioned at their working point hands-free. Common examples: Rebar Chain Assembly, Boatswain's Chairs, Descent Controllers.

#### **Know Your ABCs**

Fall protection systems are designed to prevent contacting a lower level if you fall from a height. There are several key components to these systems and it is important to know the basics.

A = Anchorage Connectors–The Anchorage is an engineered product which connects to some form of structure. The combination of these two critical components must be capable of withstanding the forces incurred during a fall. In North America, these components must be capable of withstanding a minimum 5,000 lb (22 kN) of force. Common examples: Anchor Slings, Fixed D-Rings, Beam Anchors, Concrete Hole Anchors, Carabiners.

**B = Body Support**-The Body Support is the component that is worn on or around the torso. There are two types of Body Support:

#### **Restraint Belt:**

Belt that is installed at the waist and used for worker positioning and travel restraint. A Restraint Belt must NEVER be used for fall arrest.

#### Full Body Harness:

A Full Body Harness is a body support device that is installed on the entire body and is designed to distribute the forces of a fall to the shoulders, thighs and pelvis.

All Full Body Harnesses have a back D-ring designed for the fall arrest connection point. Other styles of Full Body Harnesses are available with other attachment points such as side D-rings for work positioning, a frontal D-ring for ladder climbing, and shoulder D-rings for confined space work. Some styles of harnesses can also have a combination of all or some of these attachment points, for example our Class APLE has the following connection points: (1) back D-ring, (2) side D-rings, (1) frontal D-ring and (2) shoulder D-rings.

Full Body Harnesses are the only accepted body support to be used for a fall arrest application. NEVER use a Restraint Belt in a fall arrest application.

**C = Connectors**–Connectors are the engineered components that connect the Body Harness or Body Belt to the appropriate Anchorage. Common examples: Shock Absorbing Lanyards, Self-Retracting Lifelines (SRLs), Restraint Lanyards, Lifelines.





## HARNESSES





#### FULL-BODY HARNESSES

#### **About Full-Body Harnesses**

- Full-body harnesses are designed to arrest a fall while simultaneously distributing the tremendous shock or load to the worker's body.
- There are many applications and conditions in which full-body harnesses must be worn. In order to maximize effectiveness and minimize injury, it is critical that an appropriate body harness be selected based on the job for which it is intended. PeakWorks offers a full range of body harnesses for almost every application.
- Full-body harnesses must be fitted and tightened properly to ensure maximum protection and to minimize injury.
- Waist or restraint belts are not replacements for full-body harnesses.
- All PeakWorks full-body harnesses are built to meet or exceed the highest standards while providing maximum fit and comfort.

#### Harness Classes

- Full-body harnesses come in many styles with a variety of attachment points (D-rings). The placement of these D-rings is critical to the type of application and positioning of the worker when performing a job.
- The fall protection industry and regulatory committees have standardized the positioning of these attachment rings into Harness Classes A, D, E, L, P.
- Depending on the application, full-body harnesses may require more than one attachment class in order to correctly position the body and stress points during a fall; i.e., AE and AP.
- All full-body harnesses come with a standard Class A D-ring (located at the back between the shoulder blades).





Class A Fall Arrest

Class D Descent



Class E Limited Access



Class L Ladder



Class P Work Positioning

#### Harness Hardware

PeakWorks full-body harnesses are available with a variety of buckle types for your convenience:



Pass-Thru Chest Strap



Pass-Thru Leg Strap



Grommeted Leg Strap



Stab Lock Chest or Leg Strap



Friction Torso Adjustment



Large Back D-Ring




Padded Back Support







Lanyard Park

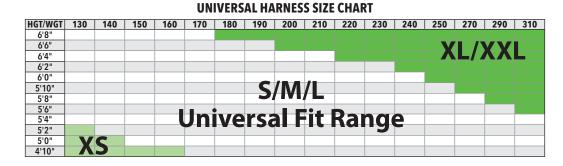







ANSI

SP


#### FULL-BODY HARNESSES

#### **Reference Guide**

Third Party Certification

PeakWorks offers four series of harnesses: PeakPro Plus, PeakPro, Contractor, and Compliance.

- Certified to both ANSI Z359.11 and CSA Z259.10 standards
- Meets or exceeds all applicable OSHA standards
- 130 to 310 lb. (60 to 141kg) capacity (combined
- Polyester webbing



NEW

• Sub-pelvic strap for added safety and support

• Fall indicator for easier inspection before use

Example: V8005170 (FBH-70110G)

#### **PEAKPRO PLUS**



- Peek-a-boo webbing has wear indicator for simple inspection
- Hi-Vis yellow top and black bottom, easily visible and distinguishable for ease of donning
- Five points of adjustment ensuring a good fit (two leg, two torso, one chest)
- Buckles: premium Stab Lock (chest), Stab Lock (legs)
- Premium padded shoulder, back and leg straps for all-day comfort
- Anodized aluminum hardware for reduced weight and no corrosion
- Includes installed trauma straps at no additional cost
- Includes integrated padded belt

#### PEAKPRO



• Hi-Vis green top and black bottom, easily visible and distinguishable for ease of donning

Example: V8255623

(FBH-60110A1020-L)

- Five points of adjustment ensuring a good fit (two leg, two torso, one chest)
- Buckles: premium Stab Lock (chest), Stab Lock (legs) or grommets (legs)
- Padded shoulder, back and leg straps for all-day comfort
- Includes installed trauma straps
- Available as harness & belt combo or just the harness.

#### **FULL-BODY HARNESSES**

**Reference Guide (continued)** 







Example: V8002000 (FBH-10000A)

#### CONTRACTOR



- Hi-Vis green top and black bottom, easily visible and distinguishable for ease of donning
- Five points of adjustment ensure a good fit (two leg, two torso, one chest)
- Buckles: Pass-thru (chest and legs), pass-thru or grommets (legs)







Example: V8001000 (FBH-10002A)

#### COMPLIANCE



- Hi-Vis greenThree points of adjustment ensuring a good fit (two leg, one chest)
- Buckles: Pass-thru (chest and legs)

### PEAKPRO PLUS HARNESS— SUPER PREMIUM SUPREME COMFORT • FIT • SAFETY • PERFORMANCE



\* \* \* \*

FULL-BODY HARNESSES

170

#### **FULL-BODY HARNESSES**

#### **PeakPro Plus Series**





The PeakWorks PeakPro Plus Harness is a sure-fit full body harness, Class APE, with increased durability and comfort. All hardware components are made from high-grade anodized aluminum for reduced weight and no



• Material: Polyester "peek-a-boo" webbing when you see red, it's time to replace the harness

risk of corrosion for added life expectancy.

- Premium padding on the shoulders, back and legs
- Super-lightweight, anodized aluminum hardware
- Reinforced padded lumbar support belt for all-day comfort
- Supreme comfort, fit, and safety
- Chest Buckles: Aluminum Stab Lock
- Leg Buckles: Aluminum Stab Lock
- Weight: 3 lbs. (1.4kg)
- Class A, Class AP, Class APE available
- Certified to CSA Z259.10 and ANSI Z359.11





V800517X Front

**BUCKLE TYPE** 

Back

**D-RING LOCATION** 

							BOCKLETTTE			D-RING LOCATION				
PRODUCT NO.	MODEL NO.	Size	Weight Capacity	Trauma Straps	Class	Harness Weight	Chest	Legs	Torso	Back	Sides	Front	Shoulders	
V8005101	FBH-70110A-S	S	130 to 310 lbs. (60 to 141kg)	Yes	Class A	2.3 lbs (1kg)	Stab Lock	Stab Lock	Friction	1				
V8005102	FBH-70110A-M	М	130 to 310 lbs. (60 to 141kg)	Yes	Class A	2.3 lbs (1kg)	Stab Lock	Stab Lock	Friction	1				
V8005103	FBH-70110A-L	L	130 to 310 lbs. (60 to 141kg)	Yes	Class A	2.3 lbs (1kg)	Stab Lock	Stab Lock	Friction	1				
V8005104	FBH-70110A-XL	XL	130 to 310 lbs. (60 to 141kg)	Yes	Class A	2.5 lbs (1.1kg)	Stab Lock	Stab Lock	Friction	1				
V8005105	FBH-70110A-XXL	XXL	130 to 310 lbs. (60 to 141kg)	Yes	Class A	2.6 lbs (1.1kg)	Stab Lock	Stab Lock	Friction	1				
V8005111	FBH-70110B-S	S	130 to 310 lbs. (60 to 141kg)	Yes	Class AP	2.5 lbs (1.1kg)	Stab Lock	Stab Lock	Friction	1	2			
V8005112	FBH-70110B-M	Μ	130 to 310 lbs. (60 to 141kg)	Yes	Class AP	2.5 lbs (1.1kg)	Stab Lock	Stab Lock	Friction	1	2			
V8005113	FBH-70110B-L	L	130 to 310 lbs. (60 to 141kg)	Yes	Class AP	2.8 lbs. (1.3kg)	Stab Lock	Stab Lock	Friction	1	2			
V8005114	FBH-70110B-XL	XL	130 to 310 lbs. (60 to 141kg)	Yes	Class AP	2.9 lbs. (1.3kg)	Stab Lock	Stab Lock	Friction	1	2			
V8005115	FBH-70110B-XXL	XXL	130 to 310 lbs. (60 to 141kg)	Yes	Class AP	2.9 lbs. (1.3kg)	Stab Lock	Stab Lock	Friction	1	2			
V8005171	FBH-70110G-S	S	130 to 310 lbs. (60 to 141kg)	Yes	Class APE	3 lbs. (1.4kg)	Stab Lock	Stab Lock		1	2		2	
V8005172	FBH-70110G-M	Μ	130 to 310 lbs. (60 to 141kg)	Yes	Class APE	3 lbs. (1.4kg)	Stab Lock	Stab Lock		1	2		2	
V8005173	FBH-70110G-L	L	130 to 310 lbs. (60 to 141kg)	Yes	Class APE	3 lbs. (1.4kg)	Stab Lock	Stab Lock		1	2		2	
V8005174	FBH-70110G-XL	XL	130 to 310 lbs. (60 to 141kg)	Yes	Class APE	3 lbs. (1.4kg)	Stab Lock	Stab Lock		1	2		2	
V8005175	FBH-70110G-XXL	XXL	130 to 310 lbs. (60 to 141kg)	Yes	Class APE	3 lbs. (1.4kg)	Stab Lock	Stab Lock		1	2		2	

HARNESSES



172

#### **FULL-BODY HARNESSES/BELT COMBOS**

• Certified to both ANSI Z359.11 and CSA Z259.10 standards

The PeakWorks PeakPro Series harness is our gold standard harness. With its legendary

comfort, this harness can be worn comfortably all day long when working at heights.

• 130 to 310 lb. (60 to 141kg) capacity (combined weight of person, tools, clothing, etc.)



### PEAKWORKS

Third Party

Certification

ANSI

American N

(SP)



Belt sizing chart:

**PeakPro Series** 

• High visibility color

• Polyester webbing

• Fully adjustable for a universal fit

Large back D-ring for easy connection
Available in a variety of classes: A, AP, AL
Meets or exceeds all applicable OSHA standards

• Fall indicator for easier inspection before use

Size	Min.	Max.
S	32" (81.3cm)	40" (1.02m)
М	36" (91.4cm)	44" (1.11m)
L	42" (1.07m)	48" (1.22m)
XL	44" (1.11m)	52" (1.32m)
XXL	48" (1.22m)	56" (1.42m)

V825562X FBH60110A1020-X

						BUCKLE TYPE				D-RING LOCATION		
PRODUCT NO.	MODEL NO.	Size	Trauma Straps	Class	Harness Weight	Chest	Legs	Torso	Back	Sides	Front	Shoulders
V8255621	FBH60110A10201	S	Yes	Class AP	3.5 lbs (1.6 kg)	Stab Lock	Stab Lock	Friction	1	2		
V8255622	FBH60110A10202	М	Yes	Class AP	3.5 lbs (1.6 kg)	Stab Lock	Stab Lock	Friction	1	2		
V8255623	FBH60110A10203	L	Yes	Class AP	3.5 lbs (1.6 kg)	Stab Lock	Stab Lock	Friction	1	2		
V8255624	FBH60110A10204	XL	Yes	Class AP	3.5 lbs (1.6 kg)	Stab Lock	Stab Lock	Friction	1	2		
V8255625	FBH60110A10205	XXL	Yes	Class AP	3.5 lbs (1.6 kg)	Stab Lock	Stab Lock	Friction	1	2		



## PEAKWORKS



**FULL-BODY HARNESSES** 

#### PeakPro Series

The PeakWorks PeakPro Series harness is our gold standard harness. With its legendary comfort, this harness can be worn comfortably all day long when working at heights.

\* \* \* BEST

- High visibility color
- Fully adjustable for a universal fit
- Fall indicator for easier inspection before use
- Large back D-ring for easy connection
- Available in a variety of classes: A, AP, AL
- Meets or exceeds all applicable OSHA standards
- Polyester webbing
- 130 to 310 lb. (60 to 141kg) capacity (combined weight of person, tools, clothing, etc.)
- Certified to both ANSI Z359.11 and CSA Z259.10 standards



V8006100 FBH-60110A



V8006110 FBH-60110B

						BUCKLE TYPE			D-RING LOCATION					
PRODUCT NO.	MODEL NO.	Trauma Straps	Class	Harness Weight	Chest	Legs	Torso	Back	Sides	Front	Shoulders			
V8006100	FBH-60110A	Yes	Class A	3.5 lbs.(1.6kg)	Stab Lock	Stab Lock	Friction	1						
V8006110	FBH-60110B	Yes	Class AP	4 lbs.(1.8kg)	Stab Lock	Stab Lock	Friction	1	2					
V8006160	FBH-60110APL	Yes	Class ALP	4.7 lbs (2kg)	Stab Lock	Stab Lock	Friction	1	2	1				

**FULL-BODY HARNESSES** 

**PeakPro Series** 



UNIVERSAL FIT-ONE SIZE FITS MOST USERS!



V8006120 FBH-60110L



PeakPro Series Harnesses include Trauma Straps!





\*\*\* BEST

V8006200 FBH-60120A



FBH-60120B

							BUCKLE TYPE				D-RING LOCATION		
PRODUCT NO.	MODEL NO.	Size	Weight Capacity	Trauma Straps	Class	Harness Weight	Chest	Legs	Torso	Back	Sides	Front	Shoulders
V8006120	FBH-60110L	Universal	130 to 310 lbs. (60 to 141kg)	Yes	Class AL	4 lbs. (1.8kg)	Stab Lock	Stab Lock	Friction	1		1	
V8006200	FBH-60120A	Universal	130 to 310 lbs. (60 to 141kg)	Yes	Class A	3.5 lbs. (1.6kg)	Stab Lock	Grommet	Friction	1			
V8006210	FBH-60120B	Universal	130 to 310 lbs. (60 to 141kg)	Yes	Class AP	4.5 lbs. (2kg)	Stab Lock	Grommet	Friction	1	2		



## **CONTRACTOR HARNESS**— PERFORMANCE SERIES

#### **FULL-BODY HARNESSES/BELT COMBOS**



• Contractor series harnesses are as lightweight as it gets for all-day comfort

\*\* BETTER

- High-visibility color
- Five-point adjustable for a universal fit
- Available with or with out belt. Belt can be added and removed.
- Two lanyard parks on chest strap for easy storage of lanyard
- Fall indicator for easier inspection before use
- 130 to 310 lbs. capacity (60 to 141kg)
- Certified to both ANSI Z359.11 and CSA Z259.10



All Contractor harnesses now include two lanyard parks for easy storage

V825521X FBH10020A1020X

00

000

V825522X FBH10000A1020X

						<b>BUCKLE TYPE</b>			D-RING LOCATION			
PRODUCT NO.	MODEL NO.	Size	Trauma Straps	Class	Harness Weight	Chest	Legs	Torso	Back	Sides	Front	Shoulders
V825521X	FBH10020A1020X	S, M, L, XL, XXL	No	Class AP	3 lbs (1.4kg)	Pass-Thru	Grommet	Friction	1	2		
V825522X	FBH10000A1020X	S, M, L, XL, XXL	No	Class AP	2.5 lbs (1.1 kg)	Pass-Thru	Pass-Thru	Friction	1	2		



PEAKWORKS





Contractor harnesses now include two lanyard parks for easy storage



#### **Contractor Series**

• Contractor series harnesses are as lightweight as it gets for all-day comfort

\*\* BETTER

- High-visibility color
- Five-point adjustable for a universal fit
- Available with or without a belt. Belt can be added and removed.
- Two lanyard parks on chest strap for easy storage of lanyard
- Fall indicator for easier inspection before use
- 130 to 310 lbs. capacity (60 to 141kg)
- Certified to both ANSI Z359.11 and CSA Z259.10



V8002000 FBH-10000A V8002210 FBH-10020B

						<b>BUCKLE TYPE</b>			D-RING LOCATION			
PRODUCT NO.	MODEL NO.	Size	Trauma Straps	Class	Harness Weight	Chest	Legs	Torso	Back	Sides	Front	Shoulders
V8002000	FBH-10000A	Universal	No	Class A	2.5 lbs. (1.1kg)	Pass-Thru	Pass-Thru	Friction	1			
V8002010	FBH-10000B	Universal	No	Class AP	3 lbs. (1.4kg)	Pass-Thru	Pass-Thru	Friction	1	2		
V8002200	FBH-10020A	Universal	No	Class A	3 lbs. (1.4kg)	Pass-Thru	Grommet	Friction	1			
V8002210	FBH-10020B	Universal	No	Class AP	3.5 lbs. (1.6kg)	Pass-Thru	Grommet	Friction	1	2		
V8002230	FBH-10020E	Universal	No	Class AE	3.5 lbs. (1.6kg)	Pass-Thru	Grommet	Friction	1			2

**FULL-BODY HARNESSES** 

**Contractor Series** 







						BUCKLE TYPE			D-RING LOCATION			
PRODUCT NO.	MODEL NO.	Size	Trauma Straps	Class	Harness Weight	Chest	Legs	Torso	Back	Sides	Front	Shoulders
V8008000	FBH-10000AHV	Universal	No	Class A	2.5 lbs. (1.4kg)	Pass-Thru	Pass-Thru	Friction	1			
V8002020	FBH-10000L	Universal	No	Class AL	3.5 lbs. (1.6kg)	Stab-Lock	Pass-Thru	Friction	1		1	
V8002030	FBH-10000E	Universal	No	Class AE	3 lbs. (1.4kg)	Pass-Thru	Pass-Thru	Friction	1			2



Third Party

Certification

ANSI

## PEAKWORKS



Contractor harnesses now include two lanyard parks for easy storage



#### **Compliance Series**

The PeakWorks Compliance Series harness is the best value on the market. When compliance and price are the key drivers, this harness is the solution.

\* GOOD

- High visibility color
- Three points of adjustment ensuring a good fit (two leg, one chest)
- Two lanyard parks on chest strap for easy storage of lanyard
- Pass-thru leg and chest buckles for quick donning
- Sub-pelvic strap for added safety and support
- Fall indicator for easier inspection before use
- Large back D-ring for easy connection
- Polyester webbing
- 130 to 310 lb. (60 to 141kg) capacity (combined weight of person, tools, clothing, etc.)
- Certified to both ANSI Z359.11 and CSA Z259.10 standards
- Meets or exceeds all applicable **OSHA** standards



FBH-10002A

V8001200 FBH-10022A

						BUCKLE TYPE			D-RING LOCATION			
PRODUCT NO.	MODEL NO.	Size	Trauma Straps	Class	Harness Weight	Chest	Legs	Torso	Back	Sides	Front	Shoulders
V8001000	FBH-10002A	Universal	No	Class A	2 lbs (0.9kg)	Pass-Thru	Pass-Thru	N/A	1			
V8001200	FBH-10022A	Universal	No	Class A	2.2 lbs (1kg)	Pass-Thru	Grommet	N/A	1			

#### FULL-BODY HARNESSES—SPECIALTY ARC FLASH

#### Welding and Arc Flash Harness

- Kevlar<sup>®</sup> webbing resists high temperatures and is designed to withstand harsh welding environments
- Five points of adjustment (two leg, two torso, one chest) for custom fit
- Upgraded Stab Lock leg and chest buckles for quick donning and
- comfortLarge fall arrest D-ring for easy lanyard connection
- Side D-rings for added versatility
- Fall indicator for convenient pre-use inspection
- Certified to ANSI Z359.11, CSA Z259.10, ASTM F887-13, and meets the revised OSHA 1910.269 standard for arc flash exposure up to 40 cal/cm<sup>2</sup>







V8009010 FBH 121102B

						<b>BUCKLE TYPE</b>			D-RING LOCATION			
PRODUCT NO.	MODEL NO.	Size	Weight Capacity	Class	Harness Weight	Chest	Legs	Torso	Back	Sides	Front	Shoulders
V8009010	FBH-121102B	Universal	130 to 310 lbs. (60 to 141kg)	Class AP	4 lbs. (1.8kg)	Stab Lock	Stab Lock		1	2		

#### Welder's Shock Absorbing Lanyards

- Partially Oriented Yarn (POY) material stretches and is encased in tubular webbing for maximum strength
- Kevlar<sup>®</sup> webbing protects against welding spatter and resists high temperatures
- Drop indicator for easier inspection before use
- Designed for a 6' fall with a capacity of 130 to 310 lbs.
- Certified to ANSI Z359.13, ASTM F887-13, and OSHA 1910.269/1926954 standards

PRODUCT NO.	MODEL NO.	Material	Length	Deployed Length	Average Arrest Force	Body	Anchor	Weight
V8109506	SA-1700-6	Kevlar w/ POY core	6' (1.82m)	10' (3m)	900 lbs. (408kg)	Snap	Snap	2.5 lbs. (1.1kg)
V8109526	SA-1702-6	Kevlar w/ POY core	6' (1.82m)	10' (3m)	900 lbs. (408kg)	Snap	Form	2.5 lbs. (1.1kg)



V8109526 SA-1702-6



V8109506 SA-1700-6





V805101X WB-1010-X



V805601X WB-6010-X



V805602X WB-6020-X



V8059 WB-6006



V860301 FBH-PAD



V860302 CP-14010

#### **BELTS AND ACCESSORIES**

The PeakWorks series of belts add versatility and productivity to any PeakWorks harness.

- Lightweight for worker comfort
- Fits all PeakWorks harnesses
- Padded lumbar support made from closed cell foam
- Plated grommets for improved corrosion resistance
- Polyester webbing

#### Belt sizing chart:

Size	Min.	Max.
S	32" (81.3cm)	40" (1.02m)
м	36" (91.4cm)	44" (1.11m)
L	42" (1.07m)	48" (1.22m)
XL	44" (1.11m)	52" (1.32m)
XXL	48" (1.22m)	56" (1.42m)



Tongue Buckle



D-Ring

PRODUCT NO. (see table	MODEL NO.	<b>Ci-c</b> ( <b>V</b> )	Product Name	Padded	<b>D-Ring Location</b>	
below)	MODEL NO.	Size (X)	Product Name	Lumbar	Back	Sides
V805101X	WB-1010-X	S, M, L, XL, XXL	Restraint Belt		1	
V805601X	WB-6010-X	S, M, L, XL, XXL	PeakPro Restraint Belt with Padded Lumbar Support	Y	1	
V805602X	WB-6020-X	S, M, L, XL, XXL	PeakPro Positioning Belt with Padded Lumbar Support	Y		2
V8059	WB-6006	Universal	Padded Lumbar Support for Belt			

#### When ordering a belt, **PRODUCT NO. X**

refers to the product size; for example:

Size	PRODUCT NO.	MODEL NO.
S	V805101 <b>1</b>	WB-1010- <b>S</b>
М	V805101 <b>2</b>	WB-1010- <b>M</b>
L	V805101 <b>3</b>	WB-1010- <b>L</b>
XL	V805101 <b>4</b>	WB-1010- <b>XL</b>
XXL	V805101 <b>5</b>	WB-1010- <b>XXL</b>

Accessories can be added to any PeakWorks harness.

PRODUCT NO.	MODEL NO.	Product Name
V860301	FBH-PAD	Removable Back Pad for PW Harnesses
V860302	CP-14010	D-Ring Extender 18" (46cm)
V860308	CP-14010	D-Ring Extender 8" (20cm)

#### **Accessorize Your Harness!**

#### www.surewerx.com/usa

#### **TRAUMA STRAPS**



- PEAKWORKS
  - HARNESSES

- In the event of a fall, trauma straps help reduce the effects of suspension trauma
- Trauma straps can be added to any PeakWorks® full body harness
- Trauma straps are an important part of any rescue plan

#### How to Use Trauma Straps

- Pull the straps out of their packs
- Clip the straps together
- Step into the straps


#### **Orthostatic Intolerance or Suspension Trauma**

- Blood can accumulate in the veins while in a sedentary position
- Reduction in quantity and/or quality ( $\rm O_2)$  of blood flowing to the brain and kidneys
- May be fatal

#### Suspension Trauma Signs and Symptoms

- Faintness
- Breathlessness
- Sweating
- Paleness
- Hot flashes
- Increased heart rate
- Nausea
- Dizziness
- Unusually low heart rate
- Unusually low blood pressure
- Graying loss of vision

HELPS TO PROVIDE PROPER CIRCULATION WHILE AWAITING RESCUE

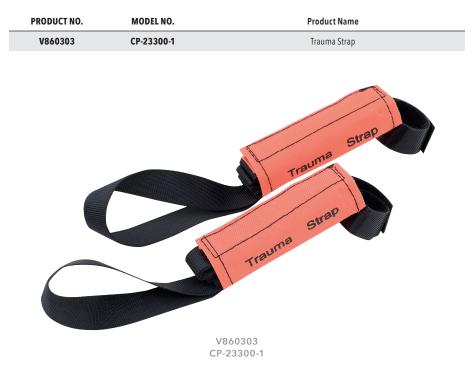

How to Use Trauma Straps





## SELF-RETRACTING LIFELINES

# REACEPTION OF THE SECOND SECON

PEAKWORKS

#### **SELF-RETRACTING LIFELINES (SRLs)**

#### **Choosing the Right Self-Retracting Lifeline**

There are different styles of SRLs that can be used for different applications. It is important to consider the specific application when choosing an SRL. Knowing the type of work environment, where the attachment point of the SRL is located on the job site, what the worker will be doing at heights and the required location of the fall protection will be crucial information to choosing the correct SRL. Below are questions to consider when choosing the appropriate SRL.edge and where a fall hazard exists that could cause the lifeline to come into contact with the edge; for example, when working over structural steel or in high-rise concrete buildings under construction with open flooring.

#### Will the Installation of the SRL be Overhead (Vertical) or at Horizontal/Foot-Level (LE)?



#### Horizontal/Foot-Level (LE)

- If there is no anchorage point overhead to connect an SRL, you will likely be connecting at foot level or horizontally, also known as leading edge (LE) application.
- A leading edge can be described as any sharp edge commonly found on a work site with which a cable or webbing connection could come into direct contact during a fall.
- An SRL-LE device is an SRL that has enhanced design features for use in leading edge applications and must always be used for any leading edge application.

#### Allowable Edges on your SRL-LE device?

- ANSI Z359 standard only requires leading edge testing over a steel sharp edge with radius of .005 inches to classify an SRL as leading edge approved. (Identified by the global sharp edge symbol below)
- ANSI Z359.14 standard does not cover testing over additional materials commonly found on many job sites, such as concrete edges, wood edges, paneled rounded fascia.
- It is important to be aware of additional edge materials that the lifeline might come in to contact with and verify if the SRL-LE can be used in that application with the manufacturer.




Global Sharp Edge symbol– Radius as sharp as .005 in. (.13mm)



#### Vertical (non-LE)

If the installation will be overhead or at shoulder level, you should determine the minimum fall clearance requirement on the job site to help identify the correct class of SRL you should be using. ANSI Z359 classifies an SRL as a CLASS A or CLASS B with the differences in arresting distances and average arrest forces indicated in the image below.

The extra 2-1/2 feet difference in arresting distance between ANSI Class A and B is a critical factor if you only have 6 feet fall clearance from the lower level (danger level).

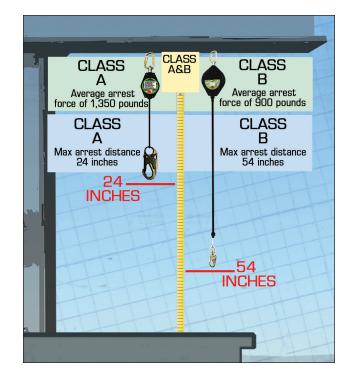

PEAKWORKS



#### **SELF-RETRACTING LIFELINES (SRLs)**

Peakworks SRL-LE Clear Advantage

#### **One Device for Both Applications**

- PeakWorks offers one device that is certified as ANSI Z359.14 CLASS A in vertical non-LE applications as well as leading edge certified for use in horizontal applications. One product works for most applications
- Reduces inventory duplication and safety investment costs

#### **Deceleration System**

- Unlike most SRL-LE devices in the market, PeakWorks SRL-LE devices do not require an external shock pack in order to meet the leading-edge standards due to the exclusive internal braking system
- This translates to shorter arresting distances in both vertical and horizontal orientation (refer to page 187 for fall clearance comparison)

#### **Allowable Edges**

- PeakWorks SRL-LE devices have had additional testing over multiple leading-edge materials commonly found on job sites, such as concrete edges, wooden beams, paneled rounded fascias, and trapezoidal sheet metal
- Contact a PeakWorks representative for information on additional material testing

#### Dyneema<sup>®</sup> Webbing vs Cable

- PeakWorks SRD-LE units are up to 32% lighter than competitors' SRD-LE of equivalent length
- Thin webbing accommodates smaller housing design
- Outstanding versatility for use on multiple surface materials
- Dyneema<sup>®</sup> webbing is a proven LE-rated material

#### THE PEAKWORKS LE ADVANTAGE

- No shock pack required
- Reduces fall clearance by up to 4 feet!
- Certified for both vertical and horizontal applications
- Ultra lightweight!



V845526006LE


PeakWorks understands the importance of calculating the fall clearance, which is why we created an app for calculating fall clearances. Visit the App Store today to download it.







#### THE PEAKWORKS SRL-LE FALL CLEAR ADVANTAGE!

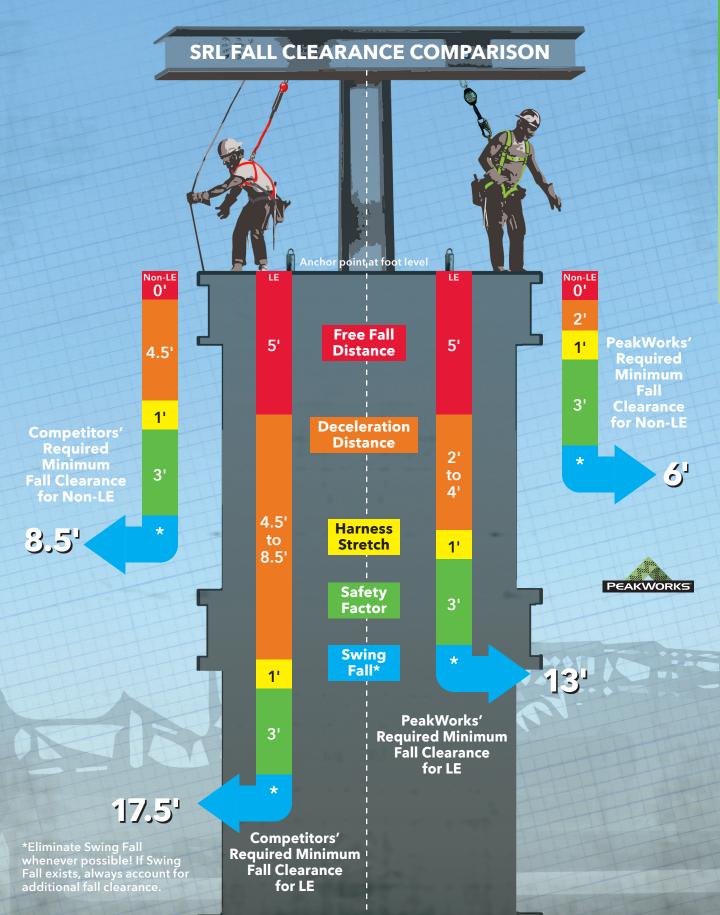



#### SELF-RETRACTING DEVICE (SRD)—LEADING EDGE

Dual Tie-Back LE



#### **COMPACT UNIT**

Among the smallest SRLs in the market. Designed for comfort and to reduce fatigue

Impact-resistant aluminum housing provides maximum durability compared to nylon or thermoplastic housing SRLs in the market

Internal automatic locking pawls will stop a fall within inches while keeping average arresting forces to 900 lbs. or less. Unlike competitor SRLs, no external shock pack is required on any of the PeakWorks SRLs as shock absorbers capability are built in to the internal braking mechanism

Tie-back snap hook with a 5,000 lb. gate strength and 0.83" (21mm) gate opening

Harness bracket allows for easy installation under the D-ring and provides a snug backpack-style fit. No separate carabiner required for harness connectivity on dual SRLs

Provides 360° rotation and leaves the harness dorsal D-ring open for rescue or other equipment attachment

> Swivel top keeps the lifeline from tangling and twisting


6 ft. retractable lifeline
 reduces dragging and trip falls

 Hi-Visibility green Dyneema<sup>®</sup>
 webbing allows workers to easily inspect webbing for damage


> 3 ft. of abrasion-resistant outer jacket tie-back legs wrap around the anchor point, allowing the tie-back snap hook to tie back on to itself

Offers more mobility for workers allowing the tieback leg to connect where traditional anchorage connectors are not available or feasible

Impact indicator provides visual inspection



PeakWorks designed the new Tie-Back with a special snap hook that will not accidentally open under gate load. Be sure to use approved Tie-Back gear that is certified to meet ANSI standards 5,000 lb. gate strength.



V845528009TB



Tie-back hook (3/4" (19mm) Gate opening)



Mini Form hook (2" (51mm) Gate opening)



Snap Hook (3/4" (19mm) Gate Opening)



Form Hook (2-1/2" (64mm) Gate Opening)

#### **SELF-RETRACTING DEVICE (SRD)–LEADING EDGE**

#### Tie-Back SRD-LE—Class A

#### **Tie-Back**

- Tie-back is an all-in-one, self-retracting lifeline and anchorage connector, thus reducing the amount of equipment required on the job site and making it a cost-effective alternative
- It allows the unit to attach directly to a compatible structural anchor by wrapping around the structure to tie-back to itself
- Single and dual 100% tie-off configurations available
- Approved for use in vertical and horizontal applications
- LE minimum fall clearance: 13 ft. (4m)
- Maximum total arrest distance: 24 in. (0.61m) non-leading edge application
- Average arrest force: 765 lbf (3.4kN)
- LE minimum setback distance: 12 in. (0.31 m)
- Third-party certified to ANSI Z359.14-2014, Class A and Leading Edge, meets applicable OSHA standards

PRODUCT NO.	MODEL NO.	Webbing Width	Length	Weight	Capacity	Dual/Single
V845528009TB	SRL-54954-9TB	0.77" (20mm)	9 ft. (2.7m)	<b>6 lbs.</b> (2.7kg)	300 lbs. (136kg)	Dual
V845552T009TB	SRL-54T54-9TB	0.77" (20mm)	9 ft. (2.7m)	<b>2.5 lbs.</b> (1.1kg)	300 lbs. (136kg)	Single















V845552T009TB (Single Tie-Back)



PEAKWORKS





V8455277-5LE






V845526006LE

#### SELF-RETRACTING DEVICE (SRD)—LEADING EDGE

#### Dual Compact SRD-LE—Class A

- Dual units are also available with lightweight aluminum rebar hooks
  Attachment points include a swivel eye on housing with connection
- pin for mouting below the dorsal D-ring
- Hi-Vis green Dyneema® webbing lifeline has been sharp-edge tested over a .005" radius sharp edge
- Class A rating means the fall distance is less than 2 ft. (0.6m) or less when connected overhead (non-LE application)
- Leading edge minimum fall clearance of 13 ft. (4m) required
- Third-party certified to ANSI Z359.14-2014, Class A and Leading Edge, CSA Z259.2.2, meets applicable OSHA standards

PRODUCT NO.	MODEL NO.	Lifeline Type	Length	Weight	Capacity	Single/ Dual	Hook Style
V8455277-5LE	SRL-54854-7-5LE	Dyneema® Webbing .77" (20mm)	7.5 ft. (2.3m)	<b>6.2 lbs.</b> (2.82kg)	300 lbs. (136kg)	Dual	Compact ladder hook (gate opening 2 in. (51mm))
V845525006LE	SRL-50502-6LE	Dyneema® webbing .77" (20mm)	6 ft. (1.8m)	<b>5.5 lbs.</b> (2.5kg)	300 lbs. (136kg)	Dual	Regular snap hook (gate opening .75 in. (19mm))
V845526006LE	SRL-50602-6LE	Dyneema® webbing .77" (20mm)	6 ft. (1.8m)	<b>7.4 lbs.</b> (3.36 kg)	300 lbs. (136kg)	Dual	Aluminum form hook (gate opening 2.5 in. (64mm))

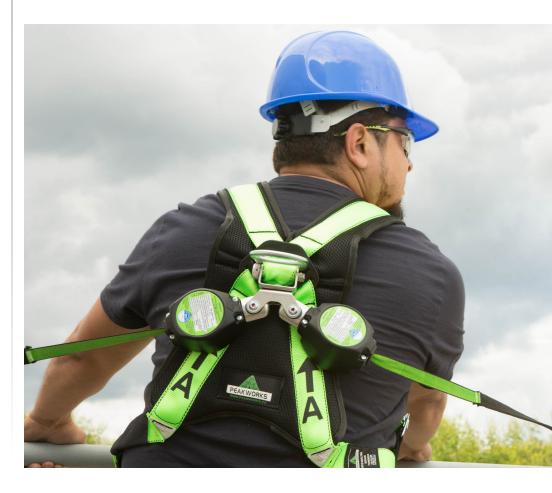

Third Party Certification

ANSI

American N

Ð

#### **SELF-RETRACTING DEVICE (SRD)–LEADING EDGE**

#### Single SRD LE—Class A

#### Class A-Dyneema® Web

- Approved for use in vertical and horizontal applications
- LE minimum fall clearance: 13 ft. (4m)
- Maximum total arrest distance: 24 in. (0.61m) non-leading edge application
- Average arrest force: 765 lbf (3.4kN)
- Minimum setback distance: 12 in. (0.31 m)
- Foot level tie-off: Tested and approved for foot level tie-off
- Operating temperatures: -22°F to 122°F (-30°C to 50°C)
- Aluminum housing
- Under 2.5 lbs. total weight
- Steel snap hook with .75" (19mm) gate opening; different snap hook types available
- Double-locking steel carbiner with 3,600 lb. gate strength included for anchor connection
- Certified to meet OSHA, ANSI Z359.14-2014, Class A, Leading Edge and CSA Z259.2.1 standards

PRODUCT NO.	MODEL NO.	Webbing Width	Length	Weight	Hook (Gate Opening)	Capacity
V845822006LE	SRL-65105-6LE	.75" (19mm) webbing	6 ft. (1.8m)	2.46 lbs. (1.12kg)	3/4" snap hook (19mm)	300 lbs. (136kg)

#### Class A—Cable

- Tested and approved for foot level tie-off
- Carabiner hook included for attachment to the anchor point or rear D-ring of the harness
- Available with regular snap hook or lightweight aluminum form hook
- Lightweight composite plastic housing
- 3/16" (5mm) galvanized cable, 10 ft. (3m) working length
- LE minimum fall clearance: 13 ft. (4m)
- Maximum total arrest distance: 24 in. (0.61m) non-leading edge application
- Average arrest force: 765 lbf (3.4kN)
- Minimum setback distance: 16 in. (0.4m)
- Third-party certified to ANSI Z359.14-2014, Class A and Leading Edge, CSA Z259.2.2, meets applicable OSHA standards

PRODUCT NO.	MODEL NO.	Cable Diameter	Length	Weight	Hook (Gate Opening)	Capacity
V845533010LE	SRL-53302-10LE	3/16" cable (5mm)	10 ft. (3m)	5.28 lbs. (2.4kg)	3/4" snap hook (19mm)	300 lbs. (136kg)
V845534010LE	SRL-53402-10LE	3/16" cable (5mm)	10 ft. (3m)	6.3 lbs. (2.9kg)	2-1/2" form hook (64mm)	300 lbs. (136kg)

#### QUICK NOTE

Selecting a Dual vs Single SRD? Dual Self-Retracting Devices allow for 100% tie-off when moving or transitioning between levels or obstacles.





Third Party

Certification

ANSI

SP

V845822006LE





V845534010LE

SELF-RETRACTING LIFELINES







V8455330XXLE SRL-53302-XXLE


#### SRL-LE




#### SELF-RETRACTING LIFELINES (SRL)—LEADING EDGE

#### Class B-Cable

- Approved for use in vertical and horizontal applications
- Tested and approved for foot level tie-off
- Additional testing over alternate leading edge materials
- Carabiner hook included for attachment to anchor point
- Aluminum housing for maximum durability ٠
- 3/16" (5mm) galvanized cable lifeline
- LE minimum fall clearance: 13 ft. (4m)
- Minimum set-back distance from edge: 20 in. (50cm); refer to user manual
- Maximum total arrest distance: 54 in. (1.4m) non-leading edge applications
- Average arrest force: 765 lbf (3.4kN)

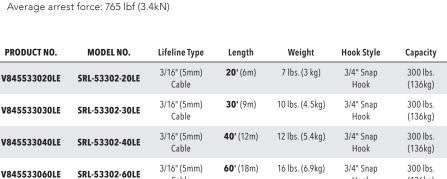

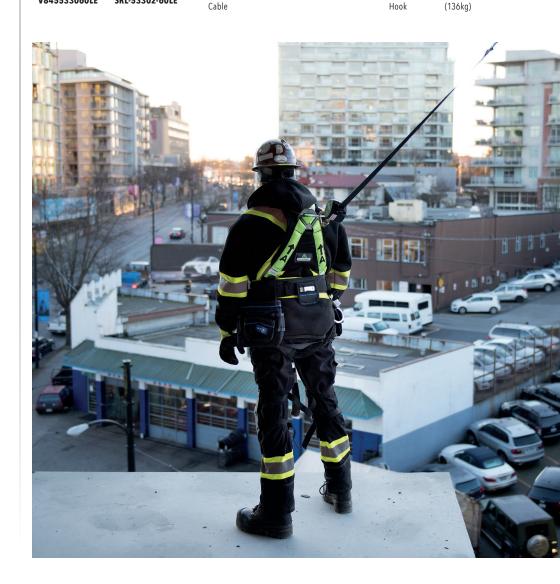



#### SELF-RETRACTING LIFELINES (SRL)-NON-LEADING EDGE

#### Class B–Dyneema® Web

- Approved for vertical use only, non-leading edge applications
- Easy and lightweight to carry
- High strength composite plastic housing
- Swivel top
- 1" (25mm) Dyneema® webbing
- Maximum total arrest distance: 54 in. (1.4m) non-leading edge applications



PRODUCT NO.	MODEL NO.	Lifeline Type	Length	Weight	Hook Style	Capacity
V845423012	SRL-40302-12	1" (25mm) Webbing	<b>12'</b> (3.5m)	2.6 lbs. (1.2 kg)	.75" Snap Hook	300 lbs. (136kg)
V845423018	SRL-40302-18	1" (25mm) Webbing	<b>18'</b> (5.5m)	2.6 lbs. (1.2 kg)	.75" Snap Hook	300 lbs. (136kg)



SRL-40302-XX

#### SELF-RETRACTING LIFELINES (SRL)—NON-LEADING EDGE

#### Class B—Cable

- Approved for vertical use only, non-leading edge applications
- Aluminum housing for maximum durability
- 3/16" (5mm) galvanized cable lifeline
- Fixed handle anchor attachment point
- Maximum total arrest distance: 54 in. (1.4m) non-leading edge applications

PRODUCT NO.	MODEL NO.	Lifeline Type	Length	Weight	Hook Style	Capacity
V845533120	SRL-53302-120	3/16" (5mm) Cable	<b>120'</b> (36m)	42 lbs. (19.1 kg)	.75" Snap Hook	300 lbs. (136kg)
V845533140	SRL-53302-140	3/16" (5mm) Cable	<b>140'</b> (42m)	60 lbs. (27.3 kg)	.75" Snap Hook	300 lbs. (136kg)
V845533170	SRL-53302-170	3/16" (5mm) Cable	<b>170'</b> (51m)	75 lbs. (34.1 kg)	.75" Snap Hook	300 lbs. (136kg)



PEAKWORKS



#### 3-Way Rescue/Recovery

- PeakWorks 3-Way Rescue and Retrieval SLR-R
- Transition from SRL mode to rescue and retrieval mode in seconds
- Aluminum housing for maximum durability
- 3/16" (5mm) galvanized cable lifeline
- Maximum total arrest distance: 54 in. (1.4m) non-leading edge applications

PRODUCT NO.	MODEL NO.	Lifeline Type	Length	Weight	Hook Style	Capacity
V845534060	SRL-53303-60	3/16" (5mm) Cable	<b>60'</b> (18m)	31 lbs. (14.1 kg)	.75" Snap Hook	310 lbs. (141kg)
V84553496	SRL-53303-96	3/16" (5mm) Cable	<b>96'</b> (29m)	48 lbs. (21.8 kg)	.75" Snap Hook	310 lbs. (141kg)
V845534140	SRL-53303-140	3/16" (5mm) Cable	<b>140'</b> (52m)	59 lbs. (26.8 kg)	.75" Snap Hook	310 lbs. (141kg)








V8455340XX SRL-53303-XX



## LANYARDS

## SONECTING OUSAFELY

www.surewer

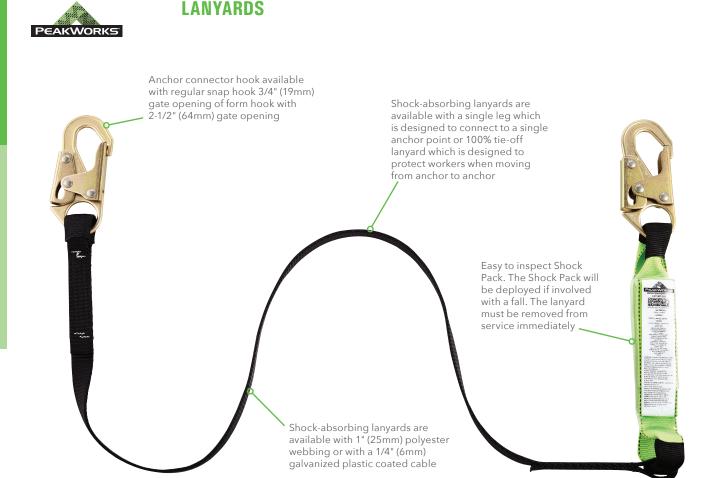



Snap Hook (3/4" (19mm) Gate Opening)



Form Hook (2-1/2" (64mm) Gate Opening)

#### **About Lanyards**

- Lanyards are engineered products, and the critical connection component between the full body harness and the anchor. They are sometimes referred to as connectors
- PeakWorks lanyards are designed and tested to comply to strict CSA and ANSI standards
- There is a wide variety of lanyards to suit a wide range of applications
- There are two common types of lanyards: Fall Restraint and Fall Arrest

#### **Fall Restraint Lanyards**

- Fall restraint lanyards are a fixed-length connection and have no shock absorbing capability
- These lanyards are designed to limit the distance a worker can move from the anchor point and towards the edge of the structure and should never be used when there is a risk of falling

#### **Fall Arrest Lanyards**

• The shock absorbing action of these lanyards limits and reduces the force of a fall on the worker, significantly reducing injury to the body

#### SP (Shock Pack):

- SP (Shock Pack) lanyards are comprised of "tear webbing" which is woven in a manner that allows the webbing to tear when it has a load applied to it. This tearing absorbs a significant amount of downward force under load, reducing injury
- This tear webbing is folded and shrink-wrapped into a compact 1" x 2" x 6" (2.5cm x 5cm x 15cm) pack that is sewn into the lanyard next to the body connector
- Cable lanyards are ideal if you're working in abrasive or high-heat environments

#### SHOCK ABSORBING LANYARDS

Shock Pack (SP)

PEAKWORKS

**Third Party** 

Certification

ANSI

PeakWorks Shock Pack (SP) shock absorbing lanyards are certified to ANSI Z359.13 standards.

- Made with a superior grade, heavy-duty 1-3/4" (45mm) or 1" (25mm) polyester webbing for maximum strength or 1/4" (6mm) galvanized plastic coated cable, with tear webbing shock absorber
- Resists abrasions and harmful UV rays
- Shock packs are designed to tear the inner webbing to reduce the force the worker feels to an acceptable level



PEAKWORKS

SA-85522-6U

Weight Single or PRODUCT NO. MODEL NO. Body Anchor 1 Anchor 2 Length X Adjustable Style Double Leg Capacity V8104304 SA-7400-4U Tear Pack 1" Webbing Single 130 to 310 lbs. Snap Snap 4' (1.2m) V8104306 SA-7400-6U Tear Pack 1" Webbing 130 to 310 lbs. **6'** (1.8m) Single Snap Snap V8104326 SA-7402-6U Tear Pack 1" Webbing Single 130 to 310 lbs. Snap Form 6' (1.8m) V8104300 SA-7400-6AU Tear Pack 1" Webbing Single 130 to 310 lbs. 6' (1.8m) Snap Snap Yes V8104320 SA-7402-6AU Tear Pack 1" Webbing Single 130 to 310 lbs. Snap Form 6' (1.8m) Yes V8104356 SA-7405-6U Tear Pack 1" Webbing Single 130 to 310 lbs. **6'** (1.8m) Snap Snap + D-ring V8104406 SA-84000-6U Tear Pack 1" Webbing Double 130 to 310 lbs. Snap Snap Snap 6' (1.8m) V8104426 SA-84022-6U Tear Pack 1" Webbing Double 130 to 310 lbs. 6' (1.8m) Snap Form Form V8108306 SA-7500-6U Tear Pack 1/4" PVC Coated Cable Single 130 to 310 lbs. Snap Snap 6' (1.8m) V8108326 SA-7502-6U Tear Pack 1/4" PVC Coated Cable Single 130 to 310 lbs. Snap Form 6' (1.8m) V8108426 SA-85522-6U Tear Pack 1/4" PVC Coated Cable Double 130 to 310 lbs. Snap Form Form 6' (1.8m)

See page 21 for welder's lanyards





V81540X LAN-3400-X







V815100X LAN-1222-X



V815120X LAN-1242-X




V860140 RA-100

#### **RESTRAINT LANYARDS**

Preventing a fall is a better way of protecting workers than arresting a fall. For these applications, PeakWorks has a wide selection of fall restraint lanyards. Fall restraint lanyards should never be used if there is any risk of falling.

- Fall restraint lanyards are a fixed length connection and have no shock absorbing capability
- These lanyards are designed to limit the distance a worker can move from the anchor point and towards the edge of the structure and should never be used when there is a risk of falling
- PeakWorks restraint lanyards are made using two types of material—a rugged heavy-duty
  polyester webbing or a premium polyester rope—and with a variety of hook configurations
- PeakWorks restraint lanyards are available in 4' (1.2m) and 6' (1.8m) lengths

PRODUCT NO.	MODEL NO.	Length	Product Name	Hook Type	
PRODUCT NO.	MODEL NO.	Length	Floduct Name	Body	Anchor
V81540X	LAN-3400-X	<b>4', 6'</b> (1.2m, 1.8m)	Restraint Lanyard with <b>1"</b> (25mm) <b>Webbing</b>	Snap	Snap
V81542X	LAN-3402-X	<b>4', 6'</b> (1.2m, 1.8m)	Restraint Lanyard with <b>1"</b> (25mm) <b>Webbing</b>	Snap	Form
V815100X	LAN-1222-X	<b>2', 3', 4', 5', 6'</b> (.6m, .9m, 1.2m, 1.5m, 1.8m)	Restraint Lanyard with <b>5/8"</b> (16mm) <b>Rope</b>	Snap	Snap
V815120X	LAN-1242-X	<b>2', 3', 4', 5', 6'</b> (.6m, .9m, 1.2m, 1.5m, 1.8m)	Restraint Lanyard with <b>5/8"</b> (16mm) <b>Rope</b>	Snap	Form
V860140	RA-100	<b>2'</b> (.6m)	Rebar Chain Assembly	(2) Snap	Form

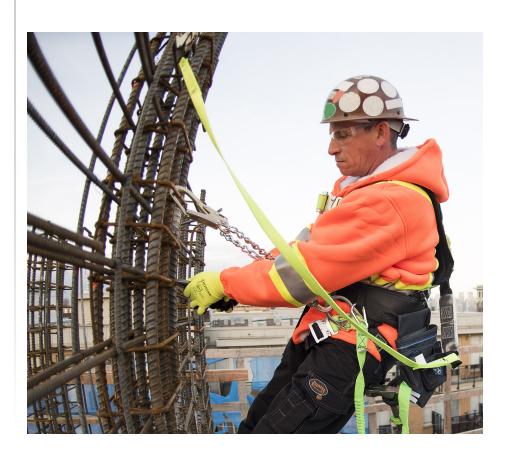

## VERT. LIFELINES & ROPE GRABS

## VERTICAL LIFELINES & ROPE GRABS

PEAKWORKS

v.surew\_com/us





V84013XXX VL-1115-X

#### **VERTICAL LIFELINES & ROPE GRABS**

#### Lifelines

- Lifelines are specially designed from rope made using high-strength polysteel
- Polysteel is an extruded co-polymer fibre that yields an extremely highstrength, lightweight rope with excellent resistance to acids and alkalis
- PeakWorks vertical lifelines are all 5/8" (16mm) in diameter
- Minimum breaking strength 6,000 lbs (27kN)
- We offer a wide range of lengths with a variety of snap hook/carabiner options
- All PeakWorks lifelines have a back splice at the trailing end to prevent the rope grab from coming off the end of the lifeline
- Certified to CSA Z259.2.5-2012 and meets or exceeds ANSI Z359.15 standards





V84014XXX VL-1125-X

PRODUCT NO. MODEL NO.		Longth	Product Name	End Configuration	
PRODUCT NO. MODEL NO.	Length	Product Name	Anchor End	Trailing End	
V84013XXX	VL-1115-X	25', 50', 100' (7.6m, 15.2m, 30.5m)	Premium Vertical Lifeline, 5/8" (16mm) Rope	Carabiner	Back Splice
V84014XXX	VL-1125-X	25', 50', 100' (7.6m, 15.2m, 30.5m)	Premium Vertical Lifeline, 5/8" (16mm) Rope	Snap Hook	Back Splice
V84084XXX	VL-1825-X	25', 50', 100' (7.6m, 15.2m, 30.5m)	Standard Vertical Lifeline, 5/8" (16mm) Rope	Snap Hook	Back Splice

Note: other lengths available as a special order.



V84084XXX VL-1825-X

#### **DID YOU KNOW?**

Automatic rope grabs are designed to move easily up and down vertical lifelines handsfree to provide continuous fall protection. PeakWorks rope grabs include a shockabsorbing pack to reduce arresting forces in the event of a fall.

#### **VERTICAL LIFELINES & ROPE GRABS**

#### **Rope Grabs**

- Rope grabs are designed to travel hands-free on 5/8" (16mm) rope
- These automatic rope grabs follow the user during their ascent or descent
- In the event of a fall, the rope grab will "bite" onto the rope and arrest the user's fall
- PeakWorks rope grabs are also equipped with a panic lock feature which "bites" onto the rope even if the user mistakenly pushes the cam up, ensuring that the rope grab will lock and arrest the fall in any situation
- Rope grabs offer the most cost-effective fall protection solution when working at height
- 130 to 310 lb. (60 to 141kg) capacity (combined weight of person, tools, clothing, etc.)
- All Peakworks rope grabs meet or exceed ANSI Z359.15 standards



Third Party

VERT. LIFELINES & ROPE GRABS





V830103 RG-11015



V830113 RG-11005

PRODUCT NO.	PRODUCT NO. MODEL NO.	Draduct Nama	Rope		
PRODUCT NO.	MODEL NO.	Product Name	Size	Туре	
V830103	RG-11015	ADP Rope Grab with Panic Grab, Small Eye w/SP	5/8" (16mm)	3 Strand	
V830113	RG-11005	ADP Rope Grab with Panic Grab, Large Eye w/SP	5/8" (16mm)	3 Strand	



## ANCHORAGE CONNECTORS

-

#### **ANCHORAGE CONNECTORS**

#### **Anchors and Roof Brackets**

- A complete fall arrest system requires three primary components: approved full body harness, connector and anchorage connector
- Anchors can be connected to a variety of materials such as steel, wood and concrete
- PeakWorks offers a wide range of anchor systems including: single-use/reusable roof anchors, sliding beam anchors, concrete hole anchors and permanent anchors
- The anchor should be located directly above the worker to prevent swinging
- The height of an anchor is a key variable when determining fall clearance
- As with all fall protection products, anchors must be inspected by a competent person at a minimum annually
- All PeakWorks anchors are built with a minimum tensile strength of 5,000 lbs (22 kN)
- All PeakWorks anchors meet or exceed CSA Z259.15 and ANSI Z359.18 standards and OSHA requirements
- 310 lb. (141kg) capacity for one worker (combined weight of person, tools, clothing, etc.)

PRODUCT NO.	MODEL NO.	Product Name	Application
V8221111	CP-10011-1	Permanent Anchorage with 1/2" (13mm) Hole	Permanent
V8221112	CP-10011-2	Permanent Anchorage with 5/8" (16mm) Hole	Permanent
V8221113	CP-10011-3	Permanent Anchorage with 3/4" (19mm) Hole	Permanent
V8229001	RB-9701	Single-Use Roof Bracket	Temporary
V8229100	RB-9800	Reusable Roof Anchor Bracket	Temporary
V8229104	RB-9900	Stainless Steel Reusable Roof Anchor Bracket	Temporary
V8221114	CP-10010-1	5K Concrete Swivel Anchor with 5/8" (16mm) Sleeve Anchor	Permanent
V8221115	CP-10010-2	5K Steel Swivel Anchor with 1/2" x 4" (13mm x 102mm) G8 Steel Bolt Lock Washer and Lock Nut	Permanent

#### **DID YOU KNOW?**

Anchors are built with a minimum tensile strength of 5,000 lbs (22kN) but will be limited to the integrity of the structure to which they are being attached. Verify the structure is properly evaluated before connecting the anchorage connector.





V822111X CP-10011-X



V8229001 RB-9701



V8229100 RB-9800

V8229104 RB-9900



V8221114 CP-10010-1



V8221115 CP-10010-2





V8222130 CP-11010-1



AC-9450-SBAR





#### **ANCHORAGE CONNECTORS**

#### **Overhead Beam Clamps**

Overhead beam clamps are designed to attach to overhead structure without the aid of any tools. Simply adjust the size of the clamp to the bottom flange of the beam, lock it in place and its ready to go. The beam anchors provide a safe and practical solution to connecting to overhead beams. PeakWorks offers two styles of beam clamps.

1) Stationary-fixed in one location

2) Sliding–which can follow the worker to prevent a swing fall

Both beam clamps style models have a breaking strength of 5,000 lbs. (22kN).

PRODUCT NO.	MODEL NO.	Product Name	Size of Beam	Style
V8222130	CP-11010-1	Adjustable Sliding Beam Anchor	3.5" to 13.25" (88.9mm to 336.6mm)	Sliding
V8221131	AC-9450-SBAR	Sky Bar	3.5" to 12" (88.9mm to 304.8mm)	Stationary
V8222150	CP-11010-3	Aluminum Super Sliding Beam	3.5" to 12" (88.9mm to 304.8mm)	Sliding
V8222138	AC-9900-TROLLEY7	I-Beam Trolley	3" to 10" (76.2mm to 254mm)	Sliding



#### **I-Beam Trolley**

- Designed to easily roll along over head I-beams while trailing the worker.
- Can be be removed and reused with out any tools.
- Easily adjust to various I-beam widths ranging from 3" to 10"
- + ANSI Z359.18 and meets applicable OSHA standards for 5,000 lbf / 22 kN

#### **ANCHORAGE CONNECTORS**

#### Drop-In/Drop-Thru Anchors

#### **Removable Anchors**

Removable anchors, developed for fall protection, are safe, lightweight, and surprisingly simple to employ. PeakWorks manufactures three styles of removable anchors

- 1) Drop-Thru Anchors
- 2) Concrete Anchors
- 3) Toggle Anchors

#### **Drop-Thru Anchors**

The Drop-Thru Anchor is a removable and reusable anchor designed for overhead applications. Available in three different sizes: 4", 6", and 12" diameter plates. Simply insert the cable end of the anchorage connector to an approved anchor and begin using it. Once the task is complete, pull the cable back through the opening and it's ready to be re-used.

#### **Concrete Anchors**

PeakWorks anchors have been tested to meet ANSI Z359.18. They have a long list of benefits above competitive products. A few include:

- Ease of use—simply drill the proper size hole into your concrete, blow the dust out with compressed air, and insert the unit
- Multi-directional attributes—PeakWorks removable anchors work in horizontal, vertical and overhead surfaces
- Reusability—when your job is done, simply fill in the drilled hole if necessary and reuse at your new desired location

#### **Toggle Anchors**

- Popular removable bolt anchor due to the portable and re-usable design.
- Concrete anchorage connector can be used in variety of fall protection applications
- Breaking strength: 5,000 lbf/22kN
- Meets ANSI Z359.18 and applicable OSHA standards

PRODUCT NO.	MODEL NO.	Product Name	Size of Open/Hole to install thru/in	Application
V8223140	AC-9452-DTA	Drop-Thru Anchor 4" Plate, 8' Cable	1-3/4" to 2" min. hole size (4.1cm to 4.4cm)	Temporary
V8223142	AC-9452-DTA-2	Drop-Thru Anchor 6" Plate, 8' Cable	1-3/4" to 2" min. hole size (4.1cm to 4.4cm)	Temporary
V8223144	AC-9452-DTA-4	Drop-Thru Anchor 6" Plate, 2' Cable	1-3/4" to 2" min. hole size (4.1cm to 4.4cm)	Temporary
V8223145	AC-9452-DTA-5	Drop-Thru Anchor 12" Plate, 8' Cable	1-3/4" to 2" min. hole size (4.1cm to 4.4cm)	Temporary
V8223146	AC-9452-DTA-6	Drop-Thru Anchor 12" Plate, 4' Cable	1-3/4" to 2" min. hole size (4.1cm to 4.4cm)	Temporary
V8223147	AC-9452-DTA-7	Drop-Thru Anchor 6" Plate, 4' Cable	1-3/4" to 2" min. hole size (4.1cm to 4.4cm)	Temporary
V8223148	AC-9452-DTA-8	Drop-Thru Anchor 4" Plate, 4' Cable	1-3/4" to 2" min. hole size (4.1cm to 4.4cm)	Temporary
V8222120	CP-12010-1	3/4" (19mm) Concrete Hole Anchor	3/4" (19mm)	Temporary
V8221121	CP-12010-2	3/4" (19mm) Toggle-Lok Anchor	3/4" (19mm)	Temporary





V8223140 AC-9452-DTA



V8222120 CP-12010-1



V8221121 CP-12010-2





V820910X RAS4







V8205705 AC-6601

V8205704 V8205505 AC-6600-48 AC-6604



AS-21000-X




AS-21110-X

#### **ANCHORAGE CONNECTORS**

#### **Anchor Slings**

- Anchor slings provide peace of mind when a temporary anchor is required
- PeakWorks offers anchor slings using two basic material styles: abrasion-resistant webbing or galvanized cable
- All PeakWorks anchor slings are built to a minimum tensile strength of 5,000 lbs (22 kN)
- All PeakWorks anchor slings meet or exceed CSA and ANSI standards
- Peakworks introduces new line of anchor slings with added wear sleeve for durability

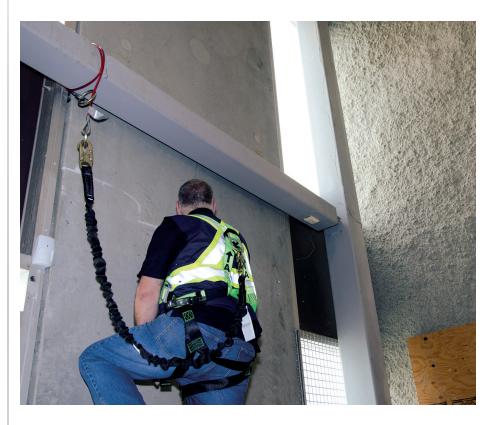


PRODUCT NO.	MODEL NO.	Product Name	Length	End Confi	guration
V820910X	RAS4	Residential Anchor Sling	<b>3', 4', 6'</b> (0.9m, 1.2m, 1.8m)	Reinforced Loop	Loop
V820950X	CAS4	Commercial Anchor Sling	<b>3', 4', 6'</b> (0.9m, 1.2m, 1.8m)	Loop	D-Ring
V8205705	AC-6601	Choker Sling, 2 D-Rings, 60" L	<b>5'</b> (1.5m)	1 Large D-Ring	1 Small D-Ring
V8205704	AC-6600-48	Wrap Sling 48" L, 2 D-Rings	<b>4'</b> (1.2m)	1 Large D-Ring	1 Large D-Ring
V82005805	AC-6600	Wrap Sling 60" L	<b>5'</b> (1.5m)	Loop	1 Large D-Ring
V8205505	AC-6604	Choker Sling, 1 D-Ring, 1 Loop 60" L	<b>5'</b> (1.5m)	Loop	1 Large D-Ring
V820800X	AS-21000-X	Cable Anchor Sling, 1/4" (6mm) PVC Coated Galv. Cable	<b>3', 4', 6'</b> (0.9m, 1.2m, 1.8m)	Eye	Eye
V820860X	AS-21110-X	Cable Anchor Sling, 1/4" (6mm) PVC Coated Galv. Cable	<b>2', 3', 4', 5', 6'</b> (0.6m, 0.9m, 1.2m, 1.5m, 1.8m)	O-Ring	O-Ring

PEAKWORKS

#### **TANK TROLLEY**<sup>™</sup>

The PeakWorks Fall Protection Tank Trolley™ is designed for use on water and fuel storage tanks. The Tank Trolley™ provides a 5,000 lbs. anchorage as required by OSHA and ANSI standards. The Tank Trolley simply rides on the top lip of the storage tank and can be used with a standard lanyard or self-retracting lifeline.

- Standards Compliance: Materials meet OSHA 1926.5 subpart M, 1910.66 app. C, and ANSI A10.14.
- Trolley: Rollers 1/4" steel, powder coated finish with forged steel O-ring attachment, polyurethane composite material
- Capacity: Application 310 lb. designed working load
- **TROLLEY6:** Storage tanks with minimum 10' diameter, fits 1/4" to 1" flange widths
- TROLLEY6A: Storage tanks with minimum 10' diameter, fits 1" to 1-7/8" flange widths
- Made in USA

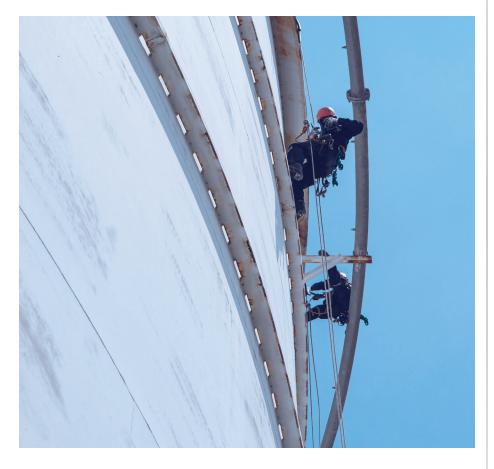

PRODUCT NO.	MODEL NO.	Description	Flange width	Weight
V82235	9900-TROLLEY6	Standard Tank Trolley™	Fits 1/4" to 1" Flange Widths	14 lbs. (6.4kg)
V82236	9900-TROLLEY6A	Wide Flange Tank Trolley™	Fits 1" to 1-7/8" Flange Widths	14.5 lbs. (6.6kg)



PEAKWORKS

V82235 9900-TROLLEY6



9900-TROLLEY6A



PEAKWORKS

www.surewerx.com/usa





## KITS

A B B



#### All you need in one convenient pail!



Pail-16L





#### ROOFER'S KITS

**RK6 Series Reusable Roofer's Kits** 



Meet the new OSHA Residential Construction Regulation.

- PeakWorks' Roofer's Kit Fall Protection System includes an adjustable full body harness, a rope grab with integral shock absorber, reusable roof anchor bracket, and a waterproof bucket
- The three-point adjustable full body harness features quick-connect pass-thru buckles and polyester webbing for lightweight comfort and dependability
- The vertical lifeline is specifically designed from high-strength polysteel rope
- The manual rope grab includes an integral 3' shock-absorbing lanyard with a double-locking snap hook
- The reusable roof anchor bracket includes an attachment D-ring.
- All system components meet or exceed applicable  $\ensuremath{\mathsf{ANSI}}$  and  $\ensuremath{\mathsf{OSHA}}$  standards.

MODEL	V8257272 RK6-25 Contains:	V8257275 RK6-50 Contains:
Harness FBH-10002A	<ul> <li>Polyester webbing</li> <li>Pass-thru buckles</li> <li>Class A harness</li> <li>Universal size</li> <li>Three-point adjustable</li> </ul>	<ul> <li>Polyester webbing</li> <li>Pass-thru buckles</li> <li>Class A harness</li> <li>Universal size</li> <li>Three-point adjustable</li> </ul>
Manual Rope Grab RG-12142	<ul><li>Manual rope grab</li><li>Integral 3 ft. shock</li></ul>	<ul><li>Manual rope grab</li><li>Integral 3 ft. shock</li></ul>
Vertical Lifeline	<ul> <li>5/8" (16mm) co-polymer rope</li> <li>25' (7.6m) long</li> <li>6,000 lbs. (27kN) minimum breaking strength</li> </ul>	<ul> <li>5/8" (16mm) co-polymer rope</li> <li>50' (15m) long</li> <li>6,000 lbs. (27kN) minimum breaking strength</li> </ul>
Snap Hooks	<ul><li>3/4" gate opening, steel</li><li>Double locking</li></ul>	<ul><li> 3/4" gate opening, steel</li><li> Double locking</li></ul>
Roof Bracket RB-9800	<ul><li> Reusable bracket</li><li> 5,000 lb. breaking strength</li></ul>	<ul><li> Reusable bracket</li><li> 5,000 lb. breaking strength</li></ul>
Max Working Load	<ul><li> 310 lbs. (141kg)</li><li> Single person use only</li></ul>	<ul><li>310 lbs. (141kg)</li><li>Single person use only</li></ul>

#### **DID YOU KNOW?**

PeakWorks offers two different styles of roofing kits to meet your needs. The **RK6** kit incorporates a three-point compliance harness with quick-connect mating buckles, and the **RK7** kit incorporates a three-point compliance harness with tongue buckles. Both kits include a vertical lifeline with integral manual rope grab. The rope grab includes a shock-absorbing lanyard to reduce arresting forces. The roof anchor requires 3" x #10 screws (not included) to install the anchor to the structure.

#### **ROOFER'S KITS**





**ROOFER'S KITS** 



All you need in one convenient pail!

Pail-16L





Meet the new OSHA Residential Construction Regulation.

- PeakWorks' Roofer's Kit Fall Protection System includes an adjustable full body harness with grommeted leg straps, a rope grab with integral shock absorber, reusable roof anchor bracket, and a waterproof bucket
- The three-point adjustable full body harness features grommeted leg strap buckles and polyester webbing for lightweight comfort and dependability
- The vertical lifeline is specifically designed from high-strength polysteel rope
- The manual rope grab includes an integral 3' shock-absorbing lanyard with a double-locking snap hook
- The reusable roof anchor bracket includes an attachment D-ring.

All system components meet or exceed applicable **ANSI** and **OSHA** standards.

MODEL	V8257282 RK7-25 Contains:	V8257285 RK7-50 Contains:
Harness FBH-10022A	<ul> <li>Polyester webbing</li> <li>Grommeted leg straps</li> <li>Class A harness</li> <li>Universal size</li> <li>Three-point adjustable</li> </ul>	<ul> <li>Polyester webbing</li> <li>Grommeted leg straps</li> <li>Class A harness</li> <li>Universal size</li> <li>Three-point adjustable</li> </ul>
Manual Rope Grab RG-12142	<ul><li>Manual rope grab</li><li>Integral 3 ft. shock</li></ul>	<ul><li>Manual rope grab</li><li>Integral 3 ft. shock</li></ul>
Vertical Lifeline	<ul> <li>5/8" (16mm) co-polymer rope</li> <li>25' (7.6m) long</li> <li>6,000 lbs. (27kN) minimum breaking strength</li> </ul>	<ul> <li>5/8" (16mm) co-polymer rope</li> <li>50' (15m) long</li> <li>6,000 lbs. (27kN) minimum breaking strength</li> </ul>
Snap Hooks	<ul><li> 3/4" gate opening, steel</li><li> Double locking</li></ul>	<ul><li> 3/4" gate opening, steel</li><li> Double locking</li></ul>
Roof Bracket RB-9800	<ul><li> Reusable bracket</li><li> 5,000 lb. breaking strength</li></ul>	<ul><li> Reusable bracket</li><li> 5,000 lb. breaking strength</li></ul>
Max Working Load	<ul><li>310 lbs. (141kg)</li><li>Single person use only</li></ul>	<ul><li>310 lbs. (141kg)</li><li>Single person use only</li></ul>

#### **REPLACEMENT PARTS**

PRODUCT NO.	MODEL NO.	Product Name
V8001000	FBH-10002A	
V8001200	FBH-10022A	
V84088025		25' Vertical Lifeline with Rope Grab
V84088050		50' Vertical Lifeline with Rope Grab
V8229100		RB-9800 Reusable Bracket







V8252366 Front Model 4400-BA1CKTS



V8252366 Back Model 4400-BA1CKTS **COMPLIANCE KIT** 



The PeakWorks® Compliance Kit includes an all-in-one harness and shock-absorbing lanyard. The full-body harness features three points of adjustment for ultra-lightweight comfort. Quick-connect pass-thru buckles, located on the chest and legs, make it easy for donning. All of the PeakWorks harnesses include fall indicators for ease of inspection and two lanyard parks for easy and safe storage. The shock-absorbing lanyard is certified to the newest ANSI standards. The shock-absorbing lanyard is permanently attached to the rear dorsal D-ring for simplicity. The lanyard is comprised of "tear webbing", which will significantly limit and reduce the force of a fall on a worker.

#### V8252366

#### Model 4400-BA1CKTS

Description	Compliance Harness	Permanently Affixed Shock Pack Lanyard
Style	<ul><li>Class A harness</li><li>Three-point adjustable pass-thru buckles</li></ul>	<ul> <li>Single leg, tear pack</li> <li>One double-locking snap hook— permanently attached</li> </ul>
Materials	<ul><li>Polyester webbing</li><li>Steel buckles</li></ul>	<ul><li>1" polyester webbing</li><li>3/4" gate opening, steel snap hook</li></ul>
Standards	<ul><li>OSHA</li><li>Certified to ANSI Z359.11</li><li>Certified to CSA Z259.10</li></ul>	<ul><li>OSHA</li><li>Certified to ANSI Z359.13</li></ul>
Size	Universal	• 6' (1.8m) length
<b>Operating Temperature</b>	<ul> <li>-31°F to 95°F (-35°C to 35°C)</li> </ul>	<ul> <li>-31°F to 95°F (-35°C to 35°C)</li> </ul>
Max Working Load	<ul><li>130 to 310 lbs. (60 to 141kg)</li><li>Single person use only</li></ul>	<ul><li>130 to 310 lbs. (60 to 141kg)</li><li>Single person use only</li></ul>

#### **DID YOU KNOW?**

All PeakWorks full body harnesses incorporate the Safe-T-Fold stress indicator in back of the harnesses. If the fold has been deployed, do not use and replace the harness immediately.

#### **CONTRACTOR KITS**



The PeakWorks® Contractor Kit includes a harness and shock-absorbing lanyard. The full-body harness features five points of adjustment for maximum comfort (two shoulder, two leg, one chest). Quick-connect pass-thru buckles, located on the chest and legs, make it easy for donning. All of the PeakWorks harnesses include fall indicators for ease of inspection and two lanyard parks for easy and safe storage. The shock-pack lanyard is certified to the newest ANSI standards. The shock-absorbing lanyard is comprised of "tear webbing", which will significantly limit and reduce the force of a fall on a worker.

#### V8252356

#### Model 4456-KIT03S

Description	Contractor Harness	Shock Pack Lanyard
Style	<ul> <li>Class A harness</li> <li>Five-point adjustable pass-thru buckles</li> </ul>	<ul> <li>Single leg, tear pack</li> <li>3/4" gate opening steel, double-locking snap hooks</li> </ul>
Materials	<ul><li>Polyester webbing</li><li>Steel buckles</li></ul>	<ul><li>1" polyester webbing</li><li>Steel snap hook</li></ul>
Standards	<ul><li>OSHA</li><li>Certified to ANSI Z359.11</li><li>Certified to CSA Z259.10</li></ul>	<ul><li>OSHA</li><li>Certified to ANSI Z359.13</li></ul>
Size	Universal	• 6' (1.8m) length
Operating Temperature	<ul> <li>-31°F to 95°F (-35°C to 35°C)</li> </ul>	<ul> <li>-31°F to 95°F (-35°C to 35°C)</li> </ul>
Max Working Load	<ul><li>130 to 310 lbs. (60 to 141kg)</li><li>Single person use only</li></ul>	<ul><li>130 to 310 lbs. (60 to 141kg)</li><li>Single person use only</li></ul>





V8252356 Front Model 4456-KIT03S



V8252356 Front Model 4456-KIT03S

#### **DID YOU KNOW?**

All PeakWorks full body harnesses feature the letter "A" and an arrow pointing to the rear dorsal D-ring. This indicates the connector should always be connected to the rear dorsal D-ring for fall arrest.





FK-010

#### **CONTRACTOR KITS**



#### V8252406

- Harness: FBH-10002A Compliance Harness, Class A with pass-thru buckles legs and chest
- Connector: SRL-65105-6LE Self-Retracting Device LE, 6' length with snap hook
- Bag: BAG-001 Large Mesh Bag

PRODUCT NO.	MODEL NO.	Product Name	Weight Capacity
V8252406	FK-010	Compliance Kit: FBH-10002A + SRL-65105-6LE+ BAG-001	130 to 310 lbs. (60 to 141kg)

#### V8252416

- Harness: FBH-10000A Contractor Harness, Class A with pass-thru buckles legs and chest
- Connector: SRL-65105-6LE, Self-Retracting Device LE, 6' length with snap hook
- Bag: BAG-001 Large Mesh Bag

PRODUCT NO.	MODEL NO.	Product Name	Weight Capacity
V8252416	FK-011	Contractor Kit: FBH-10000A + SRL-65105-6LE+ BAG-001	130 to 310 lbs. (60 to 141kg)



V8252306 FK-005

#### V8252306

- Harness: FBH-10020A Contractors 1D with Tongue & Grommet Legs
- Connector: SA-7400-6U Shock Pack 6' with Regular Snap Hooks
- Bag: BAG-001 Large Mesh Bag

PRODUCT NO.	MODEL NO.	Product Name	Weight Capacity
V8252306	FK-005	Contractor Kit: FBH-10020A + SA-7400-6U+ BAG-001	130 to 310 lbs. (60 to 141kg)



V8252416 FK-011

## **CONTRACTOR KITS**







V8252316 FK-006

V8252326 FK-007



V8252336 FK-008



V8252346 FK-009

#### V8252316

- Harness: FBH-10020A Contractors 1D with Tongue & Grommet Legs
- Connector: SA-7402-6U Shock Pack 6' with One Regular Snap Hook + One Form Hook
- Bag: BAG-001 Large Mesh Bag

PRODUCT NO.	MODEL NO.	Product Name	Weight Capacity
V8252316	FK-006	Contractor Kit: FBH-10020A + SA-7402-6U+ BAG-001	130 to 310 lbs. (60 to 141kg)

#### V8252326

- Harness: FBH-10020A Contractors 1D with Tongue & Grommet Legs
- Connector: SA-84000-6U 100% Tie-Off Shock Pack 6' with Three Regular Snap Hooks
- Bag: BAG-001 Large Mesh Bag

PRODUCT NO.	MODEL NO.	Product Name	Weight Capacity
V8252326	FK-007	Contractor Kit: FBH-10020A + SA-84000-6U+ BAG-001	130 to 310 lbs. (60 to 141kg)

#### V8252336

- Harness: FBH-10020A Contractors 1D with Tongue & Grommet Legs
- Connector: SA-84022-6U 100% Tie-Off Shock Pack 6' with One Regular Snap Hook + Two Form Hooks
- Bag: BAG-001 Large Mesh Bag

PRODUCT NO.	MODEL NO.	Product Name	Weight Capacity
V8252336	FK-008	Contractor Kit: FBH-10020A + SA-84022-6U+ BAG-001	130 to 310 lbs. (60 to 141kg)

V8252346

- Harness: FBH-10020B Contractors 3D (One Fall Arrest + Two Side D-Rings) with Tongue and Grommet Legs
- Connector: SA-84000-6U 100% Tie-Off Shock Pack 6' with Three Regular Snap Hooks
- Bag: BAG-001 Large Mesh Bag

PRODUCT NO.	MODEL NO.	Product Name	Weight Capacity
V8252346	FK-009	Contractor Kit: FBH-10020B + SA-84000-6U+ BAG-001	130 to 310 lbs. (60 to 141kg)

**CONTRACTOR KIT** 







CSK3-60

## **PEAKWORKS CONFINED SPACE KITS**— LIGHTWEIGHT • DURABLE • SAFETY

**CONFINED SPACE KITS** 

## **CONFINED SPACE KITS-COMPLETE KITS**



- The PeakWorks engineering team has developed a unique tripod with distinct advantages over the competition
- The PeakWorks TR-100 Tripod offers a built-in pulley system that is located above the head assembly
- The placement of this pulley situates the wire rope cable directly over the center point of the tripod for superior perfect operator balance
- Locating the pulley system above the head assembly also allows the operator increased head room over traditional "below-the-head" pulley systems
- The PeakWorks TR-100 features adjustable aluminum legs complete with swivel steel feet and non-slip rubber bases
- The TR-100 can be used with a 65' (20m) Man-Rated Winch (MW-65G) or, by attaching the tripod mounting bracket, with a PeakWorks SRL-53303 60' (18m) or 108' (33m) recovery style SRL
- 7' (2.1m) tripod features adjustable locking legs, two additional anchorage points, non-slip safety feet and safety chain
- MW-65G man winch features 65' (20m) galvanized cable with swivel hook, 300 lb. (135kg) capacity
- 310 lb. (141kg) capacity (combined weight of person, tools, clothing, etc.)
- Meets or exceeds CSA Z259.15 and ANSI Z359.18 and OSHA requirements



V85024 CSK1-60



V85025 CSK2-65

PRODUCT NO.	MODEL NO.	Product Name
V85024	CSK1-60	Confined Space Kit: Tripod, 3-Way 60' (18m) SRL and Bag
V85025	CSK2-65	Confined Space Kit: Tripod, 65' (20m) Man Winch and Bag
V85026	CSK3-60	Confined Space Kit: Tripod, 3-Way 60' (18m) SRL, 65' (20m) Man Winch and Bag, shown in page 54

**CONFINED SPACE KITS** 





V845179065 MW-65G



V85011 TR-100



## **CONFINED SPACE KITS-REPLACEMENT COMPONENTS**

Confined Space Tripod Systems are commonly used for fall arrest, rescue/retrieval, and material handling. Common applications for the PeakWorks confined space system include difficult to access areas such as manholes, sewer systems, tanks, pits, crawl spaces and silos.

**Quick note:** When using a confined space system, do not use the 3-way SRL as a primary means to lower or retrieve personnel or material. A man winch should be used instead and the 3-way SRL should be used as a secondary fall arrest system.

PeakWorks recommends the use of a confined space yoke in combination with a Class AE full-body harness when lifting or lowering personnel in to a confined space.



PeakPro Plus Series

V800517X Page 170, 171



**Contractor Series** 

V8002030 Page 179

PRODUCT NO.	MODEL NO.	Product Name
V845179065	MW-65G	65' (20m) Man Winch with 3/16" (5mm) Cable and Swivel Hook
V85011	TR-100	7' (2.1m) Tripod with Chain and Pulley
V860005	BAG-005	Tripod Carrying Bag (see page 41)
V855130	CP-15300-3	Confined Space Yoke
V8460	SRL-53303-BRKT	Tripod Mounting Bracket for SRL-53303
V860153	CP-41210-3	Stainless Steel Pulley–Single Oscillating Side Plates (see page 41)

PEAKWORKS

## **RESCUE PRODUCT KITS**


- OSHA requires that all employers meet the requirement for prompt rescue including personal escape, self rescue, and assisted rescue before employees work at heights.
- As time is critical when responding to a worker in need, it is incumbent upon all job sites to have the right equipment and proper training available in case of an emergency.
- PeakWorks offers a wide range of equipment and training to help you develop the rescue system required for your specific application.
- Contact your representative for details.

#### **Res-Q-Pole**

- The PeakWorks Res-Q-Pole with Res-Q-Head is an innovative and effective solution designed to remotely connect a carabiner to a fallen worker or anchor.
- The pole is a strong yet lightweight fibreglass-constructed telescoping pole that reaches from 6' to 12' (1.8 to 3.7m).
- A lightweight bracket holds the carabiner open until the operator hooks onto the victim's D-ring or anchor and pulls back. At that point, the carabiner is released from the head and snaps shut.
- Designed for use with the CP-03015-1 carabiner (sold separately).

#### **Res-Q-Kit**

- The Res-Q-Kit is a unique 4:1 100' (30.4m) raise and lower kit; it allows a person to be lowered using friction or raised by using a mechanical one-directional pulley.
- The Res-Q-Kit is our most effective retrieval kit.

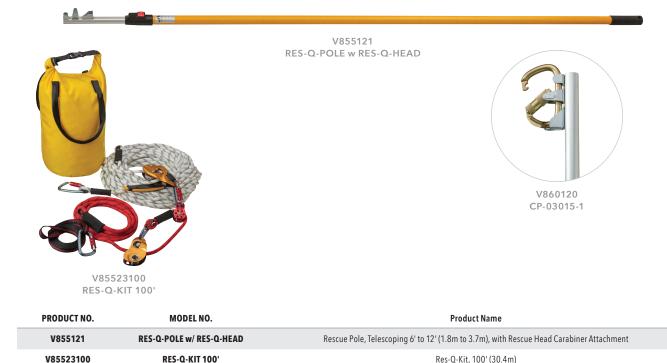

#### **About Confined Space**

A confined space is an area, other than an underground working, that:

- is enclosed or partially enclosed;
- is not designed or intended for continuous human occupancy;
- has limited or restricted means for entry or exit that may complicate the provision of first aid, evacuation, rescue or other emergency response or service;
- is large enough and so configured that a worker could enter to perform assigned work

Confined space has limited openings for entry and exit. Examples would be spaces such as: silos, vats, ship holds, sewers, tunnels, large pipelines and other such spaces that humans could enter to perform work.



PEAKWORKS



## **CONFINED SPACE AND RESCUE KITS**

#### **Davit Systems**


Davit systems are a permanent or temporary solution for confined space where a traditional tripod does not meet your needs. PeakWorks' davit system offers numerous configurations to suit an application.

#### Davit system includes:

- Davit V845534060, 3-way SRL-R rescue, and V845179065 man/material winch.
- Lightweight and portable
- High strength construction
- Easy, fast set up
- Man-rated for work positioning, confined space entry/retrieval, rescue, fall protection and material handling
- Rated for working load limit of one person (310 lbs capacity including clothing, tools and equipment)
- Legs can be adjusted to extend up to 6', 75" entry point.
- Reach 28"
- Height 84"
- Weight 89 lbs. (includes weight of 3-way SRL and winch)

#### Standards compliance:

- Work Positioning: OSHA 29 CFR 1926, subpart L
- Rescue: ANSI Z359.4
- Confined Space: OSHA 1910.146, ANSI Z117.1

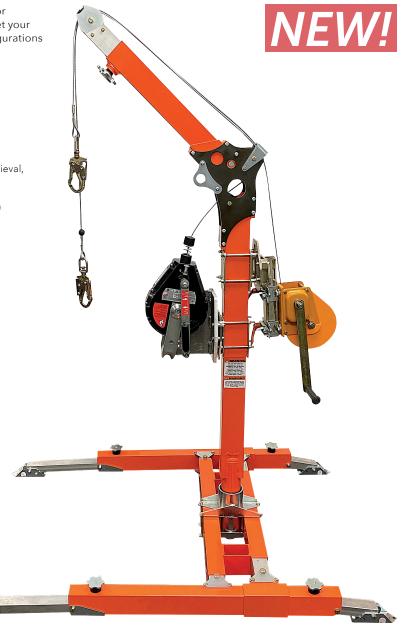

V85043 Davit Arm System

PRODUCT NO.	MODEL NO.	Product Name
V85043	DSK3-60	Complete Davit System with 3-Way SRL, 60' length, Man/Material Winch, 65' length

## Give us a call to help you design your confined space system

### HARDWARE AND ACCESSORIES





V860001 BAG-001



V860004 BAG-004



V860005 BAG-005



V860006 BAG-006



V860153

V860904

CP-41210-3 Tripod Pulley ABC Display designed for use on floor, ABC-DISPLAY peg board or slot wall, fully customizable

BAG-006

RFID-1

MERCH.

TORSO

15" x 60" (38cm x 152cm)

RFID Pouch with Grommet

Merchandising Torso for Harness

V860006

V860402

V860901



1111

## SAFETY LADDER SYSTEM



surewerx.com/usa

## LADDER SAFETY SYSTEM

#### What's Changed for Fixed Ladders Under OSHA 1910 Walking-Working Surface Standard?

Fixed ladders provide stability when ascending to an elevated work surface because they are fastened to a building or a secure surface. In the past, OSHA has required cages for ladders taller than 20 feet, but as of November 19, 2018, fall protection is required on ladders taller than or that extend beyond 24 feet. Several of the important changes are listed below.


- New height requirement. Fall protection is required on ladders taller than or that extend beyond 24 feet.
- New equipment specification. As of November 19, 2018, cages are no longer considered compliant fall protection in newly-installed ladders. To meet OSHA standards, a personal fall arrest system or a ladder safety system is required.
- **Repair/replacement specifications.** As of November 19, 2018, a personal fall arrest ladder system or ladder safety system will be used to replace any damaged or nonfunctioning section, cage, or well that was previously installed on a fixed ladder.
- Need more information? For a more detailed explanation of OSHA 1910, visit www.osha.gov/walking-working-surfaces.

PeakWorks® offers two different ladder safety systems that meet or exceed the new regulations:


- Fixed Rail System
- Cable System



PEAKWORKS



www.surewerx.com/usa

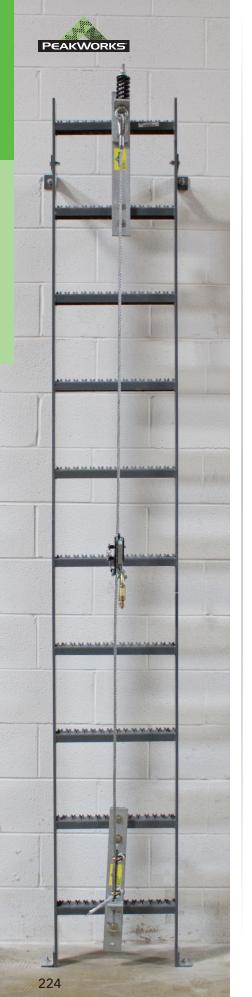

PEAKWORKS

LADDER SAFETY SYSTE

## LADDER SAFETY SYSTEM—CABLE

PeakWorks® vertical cable ladder systems are designed for hands-free movement and 100% protection. The system consists of a top and bottom bracket, and a cable that is attached to these brackets at both ends. The cable grab connects the worker to the system and provides a hands-free climb without ever having to manipulate the cable grab. For longer systems, PeakWorks® provides intermediate brackets to minimize the vibration of the system.

Systems come in standard lengths of 30', 50', 100', and 200' which are in stock and can be customized for exact requirements.

#### Features:

- Fewer parts allow for simple installation and inspection
- Pre-swaged cable termination; 7x19 high-strength galvanized 3/8" steel cable provides simple and easy installation and low maintenance
- System designed for ladder rung installation only; contact SureWerx for climb extension and removable extension options coming soon
- Designed working load is 310 lbs.
- Standards Compliance: ANSI A10.14, OSHA 1910.66, 1926.500

ORDERING NO.	Cable Length	Guides Included
V865420	30' Cable Ladder Safety System	0
V865423	50' Cable Ladder Safety System	1
V865428	100' Cable Ladder Safety System	3
V865438	200' Cable Ladder Safety System	6

#### Above kits include all hardware below:

Upper and lower brackets; specified aircraft cable length; 7x19 galvanized aircraft cable, 3/8" dia.; and cable guide for every 25' spacing.

### Don't forget your PeakWorks harness!




See pages 166-181 for our complete offering

## LADDER SAFETY SYSTEM-CABLE


#### CableGrab™

The CableGrab<sup>™</sup> is a detachable sliding device which moves freely up or down hands free on the 3/8" galvanized steel cable. When the upward force is removed, the CableGrab device automatically locks at any point on the cable. The instantaneous locking is achieved through an effective cam-locking system. The system includes a double-locking carabiner which is to be used when securing the CableGrab<sup>™</sup> device to the climber's full body harness.

- The CableGrab<sup>™</sup> glides freely up or down the cable as the worker climbs
- Dual independent cams designed to immediately lock on to the cable and arrest the fall. The CableGrab™ will remain locked until the worker can step back onto the ladder or be rescued
- Easy to install and detach anywhere along the cable
- Intended for use on 3/8" diameter solid core cable system
- Intended for use with a 2" self-locking carabiner and attached to a front D-ring full-body harness
- Maximum length of the connector to the wire grab from the harness should not exceed 9'
- 2.75 lbs lightweight construction

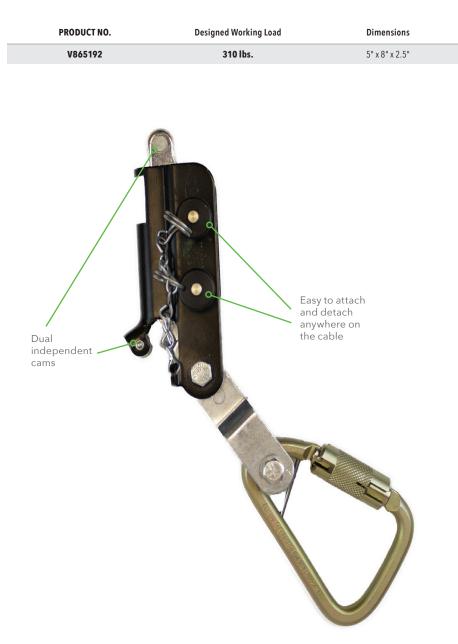





CableGrab™




Тор



Bottom



Cable Guide

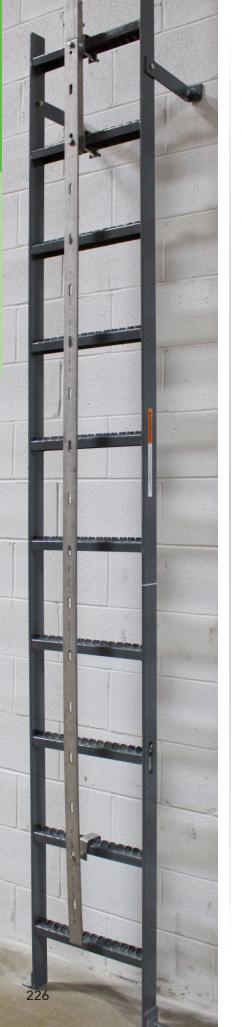

PEAKWORKS

LADDER SAFETY SYSTE

## LADDER SAFETY SYSTEM-RAIL

#### 2000 Series Climb-Rite® Fixed Rail Ladder Safety System

The Climb-Rite<sup>®</sup> fixed rigid rail ladder system offers workers 100% fall protection when climbing permanent ladders. Each are custom designed by our in-house engineering staff to provide the right solution for your needs. The system works by bringing four hardened steel brakes into contact with the rail as soon as a fall is detected. Using a detachable sliding sleeve that rolls freely up and down the rail, the Climb-Rite<sup>®</sup> system can be used both above and below ground, and on interior or exterior surfaces.

#### 100% Fall Protection for Fixed Ladders

The complete climbing system includes the Climb-Rite<sup>®</sup> device, 10' rail sections, rail splices, rail stops, parking pins, and rung clamps. The system has been designed without rail notches or serrations that can corrode or rust. Rail extensions and unique SkySwivel<sup>™</sup> rotation device are available for safe ladder access and egress.

#### Features:

- System glides effortlessly, allowing hands-free movement up and down the ladder
- Easy to install, remove, and maintain
- Climbing device weighs only 2 lbs.
- All ladder hardware is corrosion-resistant stainless steel
- Type 316 stainless steel rail is available for marine or other corrosive environments
- Can be mounted to side or center of ladder
- Ladder extensions available
- Accommodates multiple workers
- Easy to order complete kits and simple installation kits
- Meets OSHA and ANSI standards

PART NO. FOR STAINLESS STEEL	SYSTEM LENGTH	Section of 10 ft. Rails	Number of Ladder Rung Clamps Included
V865191	10'	1	3
V865193	20'	2	5
V865195	30'	3	8
V865196	40'	4	10
V865197	50'	5	12
V865198	60'	6	14
V865199	70'	7	16

Kits include 1" diameter round rung clamps. Contact SureWerx for additional shapes and sizes.

<u>Give us a call to help you design your</u> Climb-Rite<sup>®</sup> Fixed Rail Ladder System

## LADDER SAFETY SYSTEM-RAIL

#### **Climb-Rite® Trolley**

- Detachable sliding safety device that attaches to a vertical fixed rail for fall arrest protection
- Weighs 3.25 lbs.
- Made of CNC-machined aluminum with stainless steel pins, Zytel<sup>™</sup> roller bearings, stainless steel spring, and stainless steel bolts
- Fits a 1/2" x 2" stainless steel rail or T-shaped aluminum 1/4" x 2" rail
- Swivel snap hook is permanently attached to the D-ring on the Climb-Rite® device
- Complies to OSHA 1910.27(d) & 1926.1053 for Ladder Safety Devices
- Complies to ANSI A14.3 (1992) Fixed Ladder Safety Standard

PART NO.	Designed Working Load	Dimensions
V865190	310 lbs.	4" x 3-1/2" x 3"



PEAKWORKS



2000 Climb-Rite® Trolley

LADDER SAFETY SYSTEM



## LADDER SAFETY SYSTEM-RAIL

#### Rail

- Used for the Climb-Rite® ladder climbing system and the RailWalker® system
- Connects to ladder with rung clamps
- Connections are spaced every 6" space on stainless steel rails
- Join sections of rail using rail splice 9200-SSPL
- Complies to OSHA 1910.27(d) & 1926.1053 for Ladder Safety Devices
- Complies to ANSI A14.3 (1992) Fixed Ladder Safety Standard

PART NO.	Dimensions	Material	Weight
V8651164	10' x 2" x 1/4"	316 Stainless Steel	18 lbs.
V8651162	10' x 2" x 1/4"	304 Stainless Steel	18 lbs.
V8651126	10' x 2"	T6 Aluminum	12 lbs.

#### **Rail Splice Plate**

- Rail splice plate for the Climb-Rite<sup>®</sup> ladder climbing system
- Weighs 1.56 lbs.
- Made of 304 series stainless steel
- Includes stainless steel hardware
- Complies to OSHA 1910.27 & 1926.1053
- Complies to ANSI A10.14

PART NO.			

V8651203

Material
304 Stainless Steel

#### Permanent Ladder Extension

- Stainless fixed ladder extension for the Climb-Rite® Ladder climbing system
- Weighs approximately 10 lbs.
- Made of 316 series stainless steel or 304 series stainless steel
- Connects to ladder with two rung clamps
- Complies to OSHA 1910.27 & 1926.1053 for Ladder Safety Devices
- Complies to ANSI A14.3 (1992) Fixed Ladder Safety Standard

PART NO.	Dimensions	Material
V8651153	66" long	304 Stainless Steel
V8651154	66" long	316 Stainless Steel

## Removable Ladder Extension-Top



Bottom



- Allows the Climb-Rite<sup>®</sup> System to extend above the ladder
- Includes top and bottom portion of removable ladder for the Climb-Rite® ladder climbing system
- Weighs approximately 20 lbs.
- Complies to OSHA 1910.27 & 1926.1053 for Ladder Safety Devices
- Complies to ANSI A14.3 (1992) Fixed Ladder Safety Standard

PART NO.	Dimensions	Material
V8651161	2" wide x 66" long	316 Stainless Steel
V8651160	2" wide x 66" long	304 Stainless Steel



V8651203

Stainless steel rail

A Color

PEAKWORKS

## LADDER SAFETY SYSTEM-RAIL



### Ladder Rung Clamp

- Attachment hardware to connect PeakWorks ladder safety systems to ladder rungs
- Weighs .4 to .68 lbs.
- Made of 316 series stainless steel
- Rung clamps also available for other shapes and sizes; contact SureWerx
- Complies to OSHA 1910.27 & 1926.1053 for Ladder Safety Devices
- Complies to ANSI A14.3 (1992) Fixed Ladder Safety Standard

#### Round

PART NO.	Rung Clamp Size	
V8651173	5/8" Round	
V8651175	3/4" Round	
V8651182	7/8" Round	
V8651185	1" Round	

#### Square

PART NO.	Rung Clamp Size	
V8651176	3/4" Square	
V8651187	1" Square	
V8651189	1-1/4" Square	

#### Diamond


PART NO.	Rung Clamp Size
V8651184	1" Diamond



Round



Square

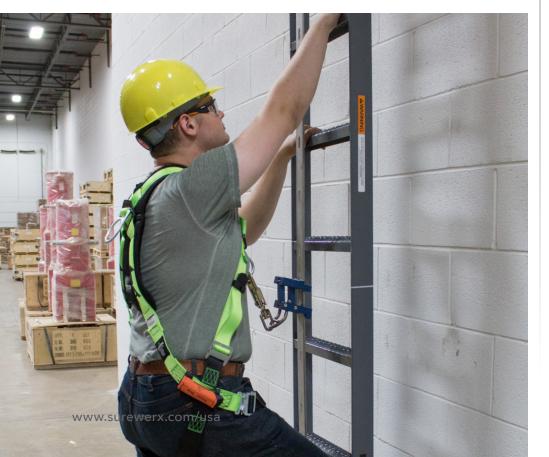



Diamond

## **EMERGENCY DESCENT SYSTEMS**



www.

m/usa

## **EMERGENCY DESCENT SYSTEMS**

#### **Escape-Rite® Series**

PeakWorks' Escape-Rite® is an emergency controlled descent device that has been trusted in the field for decades. The Escape-Rite® device helps employers meet the OSHA requirement for prompt rescue including personal escape, self-rescue and assisted rescue. It is compact, lightweight, and very simple to use. Its bi-directional design provides the capability for more users to evacuate in a short period of time. As a descent is initiated, the other end of the rope ascends, making it ready for another rescue automatically. Available in two descent rate options of 3' or 6' per second, depending on the height and number of users needed to evacuate. Angled descent packages are available for approved applications ranging from 45 to 90 degrees.

- Unit Dimensions: 18" x 9.75" x 8"
- Maximum Working Load: 400 lbs. (181 kg)—one person descent at a time
- Weight: Unit w/ spool: 12.25 lbs. Cable: .06 lb./ft.
- Made in USA

PRODUCT NO.	MODEL NO.	Description	System Lengths	User Weight Capcity
<b>V85531-</b> XX	1003-DEVXXX	Escape-Rite descent rate approx. 3'/s (0.91m/s)	<b>10'-300'</b> (3m to 91.4m)	400 lbs. (181kg), one person descent at a time
<b>V85532</b> -XX	1006-DEVXXX	Escape-Rite descent rate approx. 6'/s (1.83m/s)	<b>10'-300'</b> (3m to 91.4m)	400 lbs. (181kg), one person descent at a time

-XXX denotes the length of the system

#### **Escape-Rite Applications**

- Ski lift rescue
- Portable rescue
- High-rise buildings
- Overhead crane cabs
- Offshore oil rig platforms
- Scaffolds

#### **PeakWorks Advantage**

- Fully automatic controlled descent
- Complete system, simple to use
- No power source or special skills required to operate

#### **Escape-Rite®** Accessories

PRODUCT NO.	MODEL NO.	Description	System Lengths
V855385	1000-DC000	Escape-Rite dust cover	<b>10'-100'</b> (3m to 30.5m)
V855383	1000-CONTNR	Weather-proof container	<b>10'-300'</b> (3m to 91.4m)









V855385 1000-DC000



V855383 1000-CONTNR

**EMERGENCY DESCENT SYSTEMS** 







## **ENGINEERED SYSTEMS**

#### **Permanent Horizontal Lifelines**

#### Permacable<sup>®</sup> Systems

The PeakWorks Permacable® system is pre-engineered, synthetic cable designed for horizontal lifeline applications. It is lightweight, strong, and has an excellent resistance to weather and chemicals. The synthetic cable reduces the forces transferred to the anchorage. Permacable® meets all recommended OSHA requirements for horizontal lifelines and can span up to 200' without intermediate supports, unlike traditional steel cable which require supports every 30' to 50'. It can support up to two workers at a time. A special red inspection liner in the cable alerts the user to wear or damage.

- Lightweight; only 15 lbs. per 100'
- Strong tensile strength 16,000 lbs.
- Spans up to 200' between anchorage and weighs only 15 lbs. per 100'
- Low anchorage points forces
- Low sag
- High chemical and wear resistance
- Adjustable length allows for use in permanent or semi-permanent applications.
- Special red liner alerts user to wear or damage. Allows up to four workers.
- Variety of prefabricated anchor points, posts and inverted L's are available.
- Meets OSHA 1910.66, 1926 subpart M
- Made in the USA

#### Temp HLL (Temporary Horizontal Lifeline)

Temporary, polyester rope horizontal lifeline system with bucket storage

#### Features

- Temporary, polyester rope horizontal lifeline that is ideal for electrical, built-up-scaffolding, tanks, vessels and catwalks.
- Low anchorage forces
- High strength, chemical resistant polyester rope lifeline
- Quick set-up and disassembly
- Continuous protection
- Spans up to 150' for one or two workers
- Three-strand polyester rope allows easy inspection of inner fibers
- Rope vise makes tensioning easy
- One system can be used for many different spans
- Meets OSHA and ANSI standards

#### Specifications

- Type: Polyester Rope Horizontal Lifeline Kit
- Length: 30' to 100'
- Standards: Meets OSHA 1910.66, 1926 subpart M
- Made In USA

PRODUCT NO.	MODEL NO	Description
V865321	9450-BW030BG	30' Beamwalker Kit in a Bag
V865324	9450-BW050BG	50' Beamwalker Kit in a Bag
V865327	9450-BW075BG	75' Beamwalker Kit in a Bag

## Give Us a Call for Your Turnkey Engineered Systems



# TOOL TETHERING SYSTEM

an

0







## **PEAKWORKS TOOL COLLAR**

#### A Complete Tool Tethering Safety System!

- PeakWorks introduces the patented Tool Collar tool tethering system, designed to protect workers from tools dropped at height
- Developed and manufactured in Canada, the Tool Collar system offers a unique tool attachment product that provides the strongest, most secure tool anchor clamping mechanism in the market
- The high-strength HDPE clamps can be securely mounted onto a wide variety of flat, hex, and round shaped tool bodies, ensuring a powerful and positive tether anchor point
- HDPE materials work in both extreme cold and high heat applications and are very durable and long lasting
- The clamps are secured using high-strength fasteners and are easily installed and removed using the hex key wrench provided in the kit
- Unlike traditional heat-tape anchoring systems, our clamps can be reused and/or repositioned at any time—a true cost saving system
- **Bonus**—Tool Collar anchor clamps have been specially designed to prevent tools from falling through commonly used construction site grating (19-4)
- No other tool tethering program offers this added safety feature!
- All Tool Collar anchor clamps feature a strong, molded eye hole for quick attachment to/ detachment from wrist or standard lanyards with built-in carabiners
- Currently there are no ANSI or CSA standards for tool tethering systems; however, all Tool Collar products were subjected to an extreme and rigorous series of tests at CSA's test lab to ensure maximum peace of mind and safety
- All Tool Collar anchor clamps are available in individual blister packs or 10-piece bulk packs (five bulk packs—50 pieces per box)

#### **Tool Collar Round Clamp**

- Designed for use with round and hex shank tool bodies
- Available in four sizes: 1/2", 5/8", 3/4" and 7/8"

PRODUCT NO.	MODEL NO.	Туре	Size	Package Qty.
V8561101	TT-1000-1	Round	1/2"	1 Piece (Blister)
V8561102	TT-1000-10	Round	1/2"	10/Box, 50/Carton*
V8561201	TT-2000-1	Round	5/8"	1 Piece (Blister)
V8561202	TT-2000-10	Round	5/8"	10/Box, 50/Carton*
V8561301	TT-3000-1	Round	3/4"	1 Piece (Blister)
V8561302	TT-3000-10	Round	3/4"	10/Box, 50/Carton*
V8561401	TT-4000-1	Round	7/8"	1 Piece (Blister)
V8561402	TT-4000-10	Round	7/8"	10/Box, 50/Carton*

#### **Tool Collar Flat Clamp**

- Designed for use with wide or flat tool bodies
- Available in two sizes: 15/16" W x 5/16" H (small) and 1-15/16" W x 9/16" H (large)
- Small flat clamp fits a range of wrenches of approximately 7/16" to 1-1/4"
- Large flat clamp fits a range of larger wrenches approximately 1-1/4" to 1-7/8"

PRODUCT NO.	MODEL NO.	Туре	Size	Package Qty.
V8561501	TT-5000-1	Flat	15/16" x 5/16"	1 Piece (Blister)
V8561502	TT-5000-10	Flat	15/16" x 5/16"	10/Box, 50/Carton*
V8561601	TT-6000-1	Flat	1-15/16" x 9/16"	1 Piece (Blister)
V8561602	TT-6000-10	Flat	1-15/16" x 9/16"	10/Box, 50/Carton*

#### **Tool Collar Press Block**

- Designed for use with round and hex shank tool bodies and larger tools
- Available in two sizes: 1/2" to 3/4" and 1-1/16" to 1-1/4"
- Comes with standard hex-shaped opening and includes a separate rubber insert that can be placed between the tool and the clamp for extra sizing compatibilities and increased clamping grip

PRODUCT NO.	MODEL NO.	Туре	Size	Package Qty.
V8561701	TT-7000-1	Press block	1/2" to 3/4"	1 Piece (Blister)
V8561702	TT-7000-10	Press block	1/2" to 3/4"	10/Box, 50/Carton*
V8561801	TT-8000-1	Press block	1-1/16" to 1-1/4"	1 Piece (Blister)
V8561802	TT-8000-10	Press block	1-1/16" to 1-1/4"	10/Box, 50/Carton*

#### **Tool Collar Lanyards**

- The PeakWorks Tool Collar tethering system includes two specially designed lanyards that connect the tool anchor clamp to either the operator or to a suitable anchor point
- The wrist lanyard features a built-in heavy duty adjustable wrist collar on one end and a small carabiner on the other, conveniently tethering the tool to your wrist
- The standard lanyard features two small carabiners designed to connect to the tool anchor clamp and the other end to operator (or a suitable anchor)
- The small carabiner is designed to fit into the molded eye hole built-in to each of the Tool Collar HDPE clamps and is used to tether the tool to your body or to a suitable fixed anchor
- Both lanyards can also be used and mounted to variety of other tools in the market that feature hanging hole openings (i.e., adjustable wrenches and pipe wrenches)
- Tool Collar lanyards are designed for use with tools with a maximum weight of 15 lbs. Do not exceed this weight limitation

PRODUCT NO.	MODEL NO.	Туре	Size (unstretched)	Package Qty.
V856210	TT-9900	Wrist	13"	1 Piece c/w Hang Card
V856211	TT-9900-10	Wrist	13"	10/Box, 50/Carton*
V856220	TT-9901	Standard	32"	1 Piece c/w Hang Card
V856221	TT-9901-10	Standard	32"	10/Box, 50/Carton*
V856230	TT-9902	Slim line no locking carabiners		1 Piece c/w Hang Card
V856231	TT-9902-BULK	Standard	13"	10/Box, 50/Carton*
V856240	TT-9903	Slim line with locking carabiners		1 Piece c/w Hang Card
V856241	TT-9903-BULK	Slim line with locking carabiners		10/Box, 50/Carton*
V856250	TT-9904	Slim line with loop & locking carabiner	28"	1 Piece c/w Hang Card
V856251	TT-9904-BULK	Slim line with loop & locking carabiner	28"	10/Box, 50/Carton*

\*Please note: All Tool Collar products are available individually, or in bulk 10 packs which are then master-packed five packs (50 pieces) per carton. Save by purchasing in both 10-packs and master packs of 50.



TOOL TETHERING SYSTEN

















V890252 Tool Tether Display

#### **Tool Tether Display**

- Everything you need to get started with the new Tool Tethering System
- Designed for use on peg board or slot wall
- Modular design allows for additional merchandisers to be incorporated as needed
- $2' \times 2'$  (70cm x 70cm) footprint that takes up less space than conventional displays
- Sets up in minutes—tool tethers, hardware, and graphics all included

PRODUCT NO.	Description	Qty.
V8561101	TT-1000-1 Round Clamp 1/2"	4
V8561201	TT-2000-1 Round Clamp 5/8"	4
V8561301	TT-3000-1 Round Clamp 3/4"	4
V8561401	TT-4000-1 Round Clamp 7/8"	4
V8561501	TT-5000-1 Flat 15/16" x 5/16"	4
V8561601	TT-6000-1 Flat 1 5/16" x 9/16"	4
V8561701	TT-7000-1 Press 1/2" to 3/4"	3
V8561801	TT-8000-1 Press 1 1/16" to 1 1/4	3
V856210	TT-9900 Wrist Lanyard	3
V856220	TT-9901 Standard Lanyard	3







PEAKWORKS



PEAKWORKS





## **STANDARDS AND REGULATIONS**



#### **ANSI Standards**

Z359.11-2014	.Safety Requirements for Full Body Harness
Z359.13-2013	.Personal Energy Absorbers Energy Absorbing Lanyards
Z359.14-2012	.Safety Requirements for Self Retracting Devices for Personal Fall Arrest Systems and Rescue Systems
Z359.15-2014	.Safety Requirements for Single Anchor Lifelines and Fall Arrester for Personal Fall Arrest Systems
Z359.12-2009	.Connecting Components for Personal Fall Arrest Systems
Z359.1-2017	.Safety Requirements for Anchorage Connectors for Active Fall Protection Systems

### **CSA Standards**

CSA Z259.1-05 (R2010)	.Safety Belts and Saddles for Work Positioning and Travel Restraint
CSA Z259.2.2-17	.Self-Retracting Devices for Personal Fall-Arrest Systems
CSA Z259.2.3-16	.Descent Control Devices
CSA Z259.2.4-15	.Fall Arrester and Fixed Rigid Rails
CSA Z259.2.5-17	.Fall Arresters and Vertical Lifelines
CSA Z259.10-18	.Full Body Harness
CSA Z259.11-17	.Energy Absorbers and Lanyards
CSA Z259.12-16	.Connecting Components for Personal Fall Arrest Systems
CSA Z259.13-16	.Flexible Horizontal Lifelines
CSA Z259.14-12	.Fall Restrict Equipment for Wood Pole Climbing
CSA Z259.15-12	Anchorage Connectors
CSA Z259.17-16	.Selection and Use of Active Fall-Protection Equipment and Systems

#### OSHA REGULATIONS GOVERNING CONSTRUCTION (29 CFR PART 1926)

Subpart E covers various requirements for personal protective equipment.	
Safety Belts, Lifelines and Lanyards 1926.104	
Safety Nets	
Subpart L covers Scaffolds	ļ
<b>Subpart M</b> covers fall protection fully, including when and where fall protection systems are required and for what construction work activities. It also defines system component requirements.	
Scope, Application and Definitions	
Duty to Have Fall Protection	
Fall Protection Systems Criteria and Practices	
Training Requirements	
Subpart X covers Ladders	
OSHA REGULATIONS GOVERNING GENERAL INDUSTRY (29 CFR PART 1910)	
Subpart D mentions a few specific Fall Protection requirements relative to walking/working surfaces.	
Fixed Ladders, Ladder Safety Devices	
Safety Requirements for Scaffolding, Boatswain's Chairs	
Subpart F covers fall protection as it pertains to powered platforms, man lifts, and vehicle mounted work platforms.	
Maintenance	
Personal Fall Arrest Systems	
Subpart J covers general environmental controls in which confined spaces are addressed.	
Confined Spaces	
ANSI STANDARDS GOVERNING CONSTRUCTION AND DEMOLITION OPERATIONS	
Safety Requirements for Personal Fall Arrest Systems, Subsystems and Components	
AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)	
11 West 42nd Street	

New York, NY 10036 www.ansi.org

37 24, 31, 99	1000-DC000 231	6855U 134	14250
82 B 29, 99	1003-DEVXXX	6856U 134	14255
82 BM 29	1006-DEVXXX	6882U 138	142589
87 Mounting Blades 29, 99	4118	6883U 138	14260 26, 27, 33, 35, 36, 98
131-В 28	4178 38	6887U 139	14262
131BBAU 130	4199	6888U 139	14350 39
134BBAU 130	4400-BA1CKTS 212	6901AU 138	14355 39
134NAU 130	4456-KIT03S 213	6914AU 151	14356 39
135AU 130, 152	5040BBU 146	6916AU 151	14360 39
136U 126	5041BBU 146	6921U 132	14381 28, 37
137 24, 30, 99	5208AU 149	6922U 132	14390
139PKU 126	5209U 147	6924AU 140	14391 30, 99
139U 126	5400AU 145	6925AU 140	14393 31, 99
145U 136	5400HU 145	6930U 130	14407
170-SB 24, 28, 38	5401AU 145	6931U 130	14409
182 B 30	5401HU 145	6935AU 130	14416
182-B 99	5404AU 145, 154	6936AU 130	14418
225 Plus Winterliner 100	5405AU	6937AU 130	14420
280 Series	5408AU	6940U	14423
282-B 24, 30, 99	5409AU	6941U 140	14425
290 Series	5496U 137	6960U 132	14426
301 Series 25, 38, 69	5497U 137	6961U	14429
303 Series	5591U 137	6990U 138, 153	14434
311 Series	5592U	6991U	14445
312 Series	5598U	6995U 139	14459
325 Ultra Winterliner 100	5599U	6996U 139	14494
337	5618U	7702	14495
337SFU 150, 152	5619U	7702T 150	14496
338SFU 150	5626U	7704	14497 100
370 Speed Dial 4, 5, 9, 15,	5627U	7704T 150	14499
24, 26, 37, 88, 89, 92	5628U	9450-BW030BG 232	14501 101
380 Series 16, 17, 18,	5629U	9450-BW050BG 232	14502
21, 32, 69, 99	5670U	9450-BW075BG 232	14504
382-B 24, 99	5999AU	9900-TROLLEY6 207	14505 31, 99
390 Series 19, 20, 21,	5999PU141, 154	9900-TROLLEY6A 207	14506
32, 69, 99	6672U	12978 102, 103	14809
400 Ultra Winterliner 101	6673U	13821	14811
437	6674U	13822	14812
577AU 142	6675U	14132	14813
597U	6690U 136, 153	14200	14814
598U	6691U	14201	14815
695 NPR Winterliner 101	6692AU 127	14202 15, 33, 98, 99	14816
810 Series 65	6693AU	14203 15, 33, 98, 99	14833
812 Series 65	6730U	14214 15	14834
813 Series 65, 66	6731U 127	14215 15	14836
813 Series 65, 66 830 Series 65	6790U	14215	14838
832 Series 65	6791U 136	14225	14839
880 Series 64	6844U 134	14230	14841
881 Series 64	6845U 134	14233	14842
882 Series	6853U 134	14235 8, 9, 33, 98, 99	14843
1000-CONTNR 231	6854U 134	14238	14936 92

14937 89, 92	20224	20903 87	29089 36
14938	20225 91	20920 86	29090 36
14939 29, 99	20230 91	20921 86	29091 36
14940	20231	20923 86	29092 28
14941	20232 91	20927 86	29096 35
14942	20392 95	20930 87	29097 35
14943	20393 95	20931 87	29098 35
14944	20394 95	20932 87	29099
14945	20395	20933 87	29100
14946 31, 96, 99	20397 95	20936 87	29101
14947	20398 95	20937 87	29102
14948	20401	21000	29103
14949	20403 95	21000	29104
14951	20422 95	21002	29106
14952	20600 88	23475	29107
14955	20620 88	25708	29107
	20630 88	25708	30706 26.35
14957			
14958	20694 9	25973	31202
15953	20695 15, 27	26262 36	36900 40
16150 87	20697 89	28633 36	36901 40
16250 87	20698 89	28634 36	38423 9, 33, 98
16750	20699 89	28764 35, 96	3842415, 27, 33, 98
16756 100	20701	28765 34, 35, 96	38425 24, 29, 33, 35, 36, 98
16760 101	20702	28766	38426 33, 98
16767 101	20703	28962 35	39476 33, 98
1679737, 87, 99	20718	28963 35	39477 24, 33, 98
16799	20738	29051 28, 37	50000 42, 43
16800 37	20771	29052 36	50000P1 43
17330	20772 82	29053 36	50000V1 43
18428	20773 80	29054 36	50000V2 43
18446 89, 94, 95	20774	29055 37	50001 42, 43
19500 97	20775 80	29056 36	50002 42, 43
19502	20776 37, 80, 83, 87	29057 35	50003 43
20186	20777 37, 80, 83, 87	29058 36	50004 42, 43
20187	20778 37, 80, 83, 87	29059 36	50005 42, 43
20188	20800 90	29060 36	50006 42, 43
20189	20801 90	29062 35	50006P2 43
20191	20802 90	29075	50007 43
20192	20803 90	29076	50008 42, 44
20193	20804 90	29077 28	50009 42, 43
20194	20805 90	29078	50010
20200 91	20820 90	29079 36	50011
20201	20821 90	29080 26, 36	50012
20202 91	20822 90	29081 37	50013 43
20203 91	20823 90	29082 36	50014
20204 91	20824	29083 36	50015
20205 91	20825 90	29084 36	50016
20220	20831 91	29085 36	50017
20221	20832 88, 90	29086 36	50018
20222 91	20900	29087 26, 27, 35, 37	50025 45
20223 91	20901 87	29088 36	50026 45
0		0	

50027 45	ВН35	F40 Face Shield 26, 34, 36	GM200 63
50028 45	Blockhead 5, 31, 89	F50 Face Shield 26, 34, 36	GM500 63
50029 45	Blockhead FG 5, 85, 88, 99	F60 Face Shield 34, 37	GPL50063
50030 45	Blockhead II 85, 99	F60 Wire Mesh 34, 37	GPL53063
50031 45	С	Face Shield 5, 8, 9, 10, 11,	GPL55063
50040 42, 44	C10	12, 13, 14, 15, 16, 17, 18,	Guest-Gard53
50041 42, 44	CableGrab 225	19, 20, 21, 22, 23, 24, 25,	н
50042 42, 44	CAS4 206, 211	26, 27, 28, 29, 30, 31, 32,	H10 Disposable Earplugs 77
64230 102, 103	CH-300 85, 87, 99	33, 34, 35, 36, 37, 38, 39,	H70 80, 82, 83, 87, 99
64235 102	CH-400V 85, 86, 99	62, 69, 83, 91, 92, 96, 98	H225 82
64240 102, 103	Charger . 29, 30, 31, 85, 95, 99	FBH-1000L 179	Halo X
64420 102, 103	Chin Cup	FBH-7011G 171	Hard Hat 5, 8, 9, 11, 13, 22,
64520 102, 103	Compliance Series 169, 180	FBH-10000A169, 178, 214	29, 30, 31, 32, 33, 35, 36,
6721077	Contractor Series 169, 176,	FBH10000A1020X 177	37, 38, 83, 85, 86, 87, 88,
67212 76, 77	177, 178, 179	FBH-10000AHV 179	91, 92, 94, 95, 98, 99, 101
67220	CP-03015-1 219, 221	FBH-10000B 178	HLX-1005
67221	CP-03015-2 221	FBH-10000E 179	HP424 81
7910353	CP-04011-1 221	FBH-10000L 179, 224	HP427 81
7910853	CP-10010-1	FBH-10002A 169, 180,	HP431 81
Α	CP-10010-2 203	210, 211, 214	HPD425 81
A-5500SN	CP-10011-1 203	FBH-10020A 178, 214, 215	HPS428 83
A-5500X 29, 99	CP-10011-2 203	FBH10020A1020X 177	HSL-15
AA-7 Windgard 99, 100, 101	CP-10011-3 203	FBH-10020B 178, 215	HSL-2 5
AA-8 Windgard 100	CP-11010-1	FBH-10020E 178	HSL-1005
ABC-Display 221	CP-11010-3	FBH-10022A	HSL Series 98
AC-6600	CP-12010-1	FBH-60110A	1
AC-6600-48 206	CP-12010-2	FBH60110A10201 173	Insight 5
AC-6601 206	CP-14010 182	FBH60110A10202 173	IRUV 24, 34, 36, 63
AC-6604 206	CP-15300-3	FBH60110A10203 173	L
AC-9450-SBAR	CP-23300-1 183	FBH60110A10204 173	LAN-1222-X 198
AC-9452-DTA 205	CP-41210-3 218, 221	FBH60110A10205 173	LAN-1242-X 198
AC-9452-DTA-2 205	CSK1-60	FBH-60110APL	LAN-3400-X 198
AC-9452-DTA-4 205	CSK2 217	FBH-60110B	LAN-3402-X 198
AC-9452-DTA-5	CSK2-60	FBH-60110L	M
AC-9452-DTA-6 205	CSK2-65	FBH-60120A 175	Max Light
AC-9452-DTA-7	CSK3-60	FBH-60120B 175	Maxview . 5, 14, 15, 33, 53, 69,
AC-9452-DTA-8 205	D	FBH-70110A 171	98, 99
AC-9900-TROLLEY7 204	Davit Arm System 220	FBH-70110B 171	Merch. Torso
Acetate . 18, 24, 28, 34, 36, 38	Disposable Dust Mask 102	FBH-70110G 168, 171	MFS-320
Advantage	DP4 10, 11, 12, 13, 32, 69, 99	FBH-121102B	MFS320
Advantage Plus Series 50	Drybrow	FBH-PAD 182	Model C
Advantage Series 52, 53, 82,	DSK3-60	Fibre-Metal	Model H
90, 91, 108	Dual Compact SRD-LE 190	FK-005 214	Model K
AS-21000-X	Dual Tie-Back LE 188	FK-006 215	Model P 30, 99
AS-21110-X	<b>F</b>	FK-007 215	MW-65 216, 218, 220
B	F4XP 5, 24, 26, 27, 33,	FK-008 215	MW-65G
B5	35, 36, 37, 38, 69, 98	FK-009 215	N
B3	F10 Face Shield 26, 34, 35	FK-010 214	N95 Particulate
BAG-001		FK-010	
BAG-004 221 BAG-005 218, 221	F20 Face Shield 26, 34, 35 F30 Face Shield26, 28,	FR-011	Respirator 102, 103 N99 Particulate
BAG-006 221	34, 36	G	Respirator 102, 103

NexGen 5	S23401 82	S32162B 13	S39010 20
Nitro	S23403 76, 81	S32163 13	S39020 20
Nomex 101	S23404 81	S32163B 13	S39040 20
0	S23406 81	S32166 13	S39050 20
Odyssey II 58, 59, 60, 61, 67	S23407 81	S32166B 13	S39100 21
Old Firebird 52	S23409 83, 99	S3218111, 12, 13	S39110
OTG 52, 53	S23410 76, 77	S32182 13	S39120 20
Р	S23411	S32183 13	S39140 19, 20
P95 Particulate	S23412 77	S32188 13	S39150 19, 20
Respirator 102, 103	S23413 77	S32200	S39200 21
PeakPro 174, 175, 182	S2341477	S32210 12, 13	S39210 20
PeakPro Plus Series . 168, 170,	S23420 78	S32212 12	S39240 20
171	S23421 78	S3225111, 12, 13	S39250 20
PeakPro Series 168, 172,	S23422 78	S32252 13	S61600
173, 174, 175	S23430	S32261	S61601 24, 32, 99
PET 39	S23431 79	S32262 13	S61602 32, 99
PETG 24, 34, 35, 96	S23469 70	S32281	S61610 23, 32, 99
Polycarbonate 9, 10, 12, 13,	S23470 70	S32282 13	S61900
14, 15, 16, 17, 18, 19, 20,	S23480 70	S35000	S61970 12, 13, 16, 18,
21, 22, 23, 24, 25, 27, 34,	S23490 70	S35020	21, 22, 23, 32, 99
35, 36, 38, 42, 46, 48, 50,	S27051 16, 17, 18, 19, 20, 21	S35040	S69500
52, 54, 55, 58, 62, 63, 65	S30100	S35050	S70000
Polypropylene	S30110	S35100	S70001 47
Proban	S30120 25	S35120	S70002 47
Propionate 24, 34, 36	S30310	S35140	\$70701 52
Q	S31200	S35150	S70703 54
Quad 5005, 8, 9, 33,	S31201 23	S36000	S70704 54
69, 98, 99	S31220 23	S36020	S70705 54
R	S31222 23	S36040	S70711
R05 Disposable	S31223 23	S36050	S70721 52
Dust Mask 102, 103	S31224 23	S37040 38	S70731 52
R10 Respirator 102, 103	S32000	S37050 38	S71100 50
R20 Respirator 102, 103	S32001 13	S37599	S71101 50
R30 Respirator 102, 103	S32003 13	S37600	S71102 50
RA-100 198	S32010 10, 11, 12, 13	S37601	S71200 50
RAS4 206, 211	S32011 12, 13, 23	S37606	S71201
RB-9701 203	S32012 12	S37607 38	\$71202 50
RB-9800	S32030 10, 12, 13	S37608	S71203 50
RB-9900	S32032 12	S37701 38	S71400 51
Respirators 102	S32050	S38110	S71401
Res-Q-Kit	S32052	S38140 16, 17	S71402 51
Res-Q-Pole w/	S32100	S38150 16, 17	S71910 46, 47
Res-Q-Head 219	S32130 13	S38210 18	S71911
RFID-1	S32150 13	S38230	S71912 47
RG-11005 201	S3215111, 12, 13	S38240 18	S72000 48
RG-11015	S32152 13	S38250	S72001 48
RG-12142	S32153 13	S38410 16, 17	S72002 48
S	S32155 13	S38440 16, 17	S72100 49
S22185 71	S32161 12, 13	S38510 18	S72101
S22448 64, 65	S32161B 12, 13	S38540	S72102 49
S23400	S32162 13	S39000	S72300 48, 49

	1		
S72301 49	S80246 59	S90488 69	SRL-53302-140 193
S72302 49	S80251 59	S90494 68, 69	SRL-53302-170 193
S72400 49	S80290 59	S90496 69	SRL-53303 218
S72401 49	S81000 65	S96110 106, 107	SRL-53303-060 194, 216
S72402 49	S8101065	S96110-6 108	SRL-53303-96 194
S72903 55	S81200 65	S96110-7 108	SRL-53303-140 194
S72905 55	S8121065	S96111 107	SRL-53303-BRKT216, 218
S73401 52	S81210E 65	S96112 107	SRL-53402-10LE 191
S73402 52	S81220 65	S96113 107	SRL-54854-7-5LE 190
S73421 52	S81220X 65	S96114 107	SRL-54954-9TB 189
S73471 52	S8131066	S96211 107	SRL-65105-6LE 191, 214
S73481 52	S81320 66	S96310 108	т
S73601 51	S81330 66	S96311 108	Tie-Back SRL-LE 189
S73611 51	S82000 63	S96350 108	Titan 32
S73621 51	S82500 63	S96410 109	Tonedown 200 82
S73631 51	S83000 66	S96411 109	Tool Tether Display 236
S73801 53	S83010 66	S96412 109	TR-100
S73802 53	S83200 66	S96413 109	Translight 435 Flip 5
S74201 51	S83210 66	SA-1700-6 181	Translight 555 5
S74202 54	S8511067	SA-1702-6 181	Trauma Straps 175, 183
S74203 54	S85150 67	SA-7400-4U 197	Truesight II 5
S74204 54	S85250 67	SA-7400-6AU 197	TT-1000-1 235
S74241 51	S85350 67	SA-7400-6U197, 214	TT-1000-10 235
S74271 51	S85450 67	SA-7402-6AU 197	TT-2000-1
S74701 55	S85550 67	SA-7402-6U197, 215	TT-2000-10 235
S74751 55	S85560B67	SA-7405-6U 197	TT-3000-1
S76301 53	S88000 64	SA-7500-6U 197	TT-3000-10
S76341 53	S88003 64	SA-7502-6U 197	TT-4000-1
S76361B 53	S88010 64	SA-84000-6U 197, 215	TT-4000-10
S76371 53	S8811064	SA-84022-6U	TT-5000-1
S76701 53	S88200	SA-85522-6U 197	TT-5000-10
S76771 53	S88210 64	Safe 2 Protection	TT-6000-1
S79100 52	S90306	System 37, 86, 87, 99	TT-6000-10
S79301 53	S90315 73	SC-6 5, 29, 30, 31, 33,	TT-7000-1
S79302	S90320	35, 36, 85, 92, 98, 99	TT-7000-10
S79371 53	S90321 73	Sebring 53	TT-8000-1
S79372 53	S90322 72, 73	Sentry III 29, 30, 31, 85, 94, 99	TT-8000-10 235
S79901 54	S90324 73	Single SRD LE 191	TT-9900
S79904 54	S90325	Smartweld	TT-9900-10
S79905 60	S90326 73	Speed Dial 370 8, 14	TT-9901
S79906 60	S90329 74	SRL-54T54-9TB 189	TT-9901-10
S80200	S90330	SRL-40302-12	TT-9902
S80201 58, 59	S90331	SRL-40302-18	TT-9902-BULK
S80202	S90332 74	SRL-50502-6LE 190	TT-9903
S80203 58, 59	S90333	SRL-50602-6LE 190	TT-9904
S80203 58, 60, 67	S90335 73	SRL-53302-10LE 191	TT-9904-bulk 235
S80210 58, 60, 67	S90336 73	SRL-53302-20LE 192	U
S80211 58, 60	S90330 73 S90479 69	SRL-53302-20LE 192 SRL-53302-30LE 192	Ultra Flex III 106, 107, 108
S80225 61	S90479 69 S90482 69	SRL-53302-30LE 192 SRL-53302-40LE 192	Universal 9, 11, 12, 13, 15,
S80228 58, 59	S90482 69	SRL-53302-40LE 192 SRL-53302-60LE 192	
S80231 58, 59 S80245 60	S90484 69 S90486 69	SRL-53302-60LE 192 SRL-53302-120 193	16, 18, 20, 22, 23, 24,
500245 60	390400	อกม-ของข2-120 193	27, 29, 30, 31, 32, 34, 35,

36, 37, 38, 69, 77, 78, 96,	V856230 235	V1021150U 130	V1082350U 146
99, 101, 103, 166, 173, 174,	V856231 235	V1021170U 130	V1082360U 146
175, 177, 178, 179, 212, 213	V856240 235	V1021260U 130	V1120651U 146
v	V856241 235	V1021571U 130, 152	V1120661U 146
V8059 182	V856250 235	V1021580U 130	V1130460U 147
V8460	V856251 235	V1021840U 126	V1130560U 149
V81540X 198	V860001 221	V1021850U 126	V1200251U 145
V81542X 198	V860004 221	V1021860U 126	V1200261U 145
V82235 207	V860005 218, 221	V1023550U 136, 153	V1200350U 145
V82236 207	V860006	V1023560U 136	V1200360U 145
V83010 201	V860120 219, 221	V1023950U 136	V1200451U 145, 154
V84013XXX 200	V860121 221	V1023960U 136	V1200461U 145
V84014XXX 200	V860130 221	V1024850U 132	V1210160U 148
V84084XXX 200	V860140 198	V1024860U 132	V1210170U 148
V85011	V860151 198	V1025050U 134	V2510850U 151
V85024 217	V860153 218, 221	V1025060U 134	V2510860U 151
V85025 217	V860301 182	V1025150U 134	V2540310 150
V85026	V860303	V1025160U 134	V2540350 150
V85043 220	V860308 182	V1025250U 134	V2570450U 150
V85531-XX	V860402 221	V1025260U 134	V2570470U 150, 152
V85532-XX 231	V860901 221	V1030150U 136	V3010460U
V254031T 150	V860904	V1030550U 132	V3550170116
V254035T 150	V865190 227	V1030560U 132	V3550270115, 120
V800517X171, 218	V865191	V1040850U 137	V3550370
V805101	V865192 225	V1040860U 137	V3550470117
V805101X 182	V865193 226	V1041050U 137	V3550570113
V805601 182	V865195 226	V1041060U 137	V3550670114
 V805601X 182	V865196 226	V1051150U 138, 153	V3550870114
V805602 182	V865197	V1051160U 138	V3550970114
 V805602X	V865198 226	V1051250U 139	V3551070118
V815100X 198	V865199 226	V1051260U 139	V3551170119
V815120X 198	V865321 232	V1052160U 138	V3551270 120
V820310X 206	V865324 232	V1054050U 138	V3551370 120
V820350X 206, 211	V865327 232	V1054060U 138	V4550150 120
V820800X 206	V865420	V1054250U 139	V4550250 120
V820860X 206	V865423 224	V1054260U 139	V4550350 120
V820910X 206	V865428 224	V1060351U	V4550650 120
V820950X 206	V865438 224	V1060360U 132	V4550850 120
V825521X	V890252 236	V1060450U 132	V8001000169, 180, 211
V825522X	V1010141U 127	V1060461U	V8001200
V830103 201	V1010151U 127	V1060550U	V8002000
V830113	V1010250U 128	V1060560U	V8002010 178
V845552T009TB 189	V1010260U 128	V1070160U	V8002020 179, 224
V855121	V1010450U	V1070360U	V8002030
V855130 218	V1010460U	V1070760U	V8002060
V855383 231	V10104000 120	V1080150U	V8002200 178
V855385 231	V1011160U 127	V1080160U	V8002210 178
V856210 235	V1020161U 130	V1080350U	V8002230 178
V856210 235	V1020251U 130	V1080360U	V8005101 171
V856220 235	V1020951U 130	V1081350U	V8005102 171
V856221 235	V10203510 130	V1081360U 146	V8005103 171

V8005104 171	V8222138 204	V8651175 229	X330 52
V8005105 171	V8222150 204	V8651176 229	X350 52
V8005111 171	V8223140 205	V8651182 229	XM300 50
V8005112 171	V8223142 205	V8651184 229	XM310 50
V8005113 171	V8223144 205	V8651185 229	XM320 51
V8005114 171	V8223145 205	V8651187 229	XM330 51
V8005115 171	V8223146 205	V8651189 229	XM340 51
V8005170 168	V8223147 205	V8651203 228	XM340RX 54
V8005171 171	V8223148 205	V82005805 206, 211	XP420 49
V8005172 171	V8229001 203	V84088025 211	XP450 49
V8005173 171	V8229100 203, 211	V84088050 211	XP460 49
V8005174 171	V8229104 203	V84537065 218, 220	XPS502 47
V8005175 171	V8252306 214	V84553496 194	XPS530 47
V8006100174	V8252316 215	V85523100 219	
V8006110174	V8252326 215	V845179065 216, 218, 220	
V8006120	V8252336 215	V845423012LE 193	
V8006160174	V8252346 215	V845423018LE 193	
V8006200 175	V8252356 213	V845525006LE 190	
V8006210 175	V8252366 212	V845526006LE 186, 190	
V8008000 179	V8252406 214	V845528009TB 188, 189	
V8009010 181	V8252416 214	V845533010LE 191	
V8051011 182	V8255621 173	V845533020LE 192	
V8051012 182	V8255622 173	V845533030LE 192	
V8051013 182	V8255623 173	V845533040LE 192	
V8051014 182	V8255624 173	V845533060LE 192	
V8051015 182	V8255625 173	V845533120 193	
V8104300 197	V8455277-5LE 190	V845533140 193	
V8104304 197	V8561101 235	V845533170 193	
V8104306 197	V8561102 235	V845534010LE 191	
V8104320 197	V8561201	V845534060 194, 216, 220	
V8104326 197	V8561202 235	V845534140 194	
V8104356 197	V8561301 235	V845822006LE 191	
V8104406 197	V8561302 235	VL-1115-X 200	
V8104426 197	V8561401 235	VL-1125-X 200	
V8108306 197	V8561402 235	VL-1825-X 200	
V8108326 197	V8561501 235	w	
V8108426 197	V8561502 235	WB-1010-X 182	
V8109506 181	V8561601 235	WB-6006 182	
V8109526 181	V8561602 235	WB-6010-X 182	
V8205505 206	V8561701 235	WB-6020-X 182	
V8205704 206, 211	V8561702 235	Welding and Arc Flash	
V8205705 206, 211	V8561801 235	Harness 181	
V8221111	V8561802 235	Welding Helmet 5, 33, 98	
V8221112 203	V8651126 228	Western Outlaw 85, 97	
V8221113 203	V8651153 228	Windgard 100	
V8221114	V8651154 228	Wind Jammer IV 101	
V8221115 203	V8651160 228	Wire Mesh Face Shield. 34, 37	
V8221121 205	V8651161 228	x	
V8221131 204	V8651162 228	X35 55	
V8222120 205	V8651164 228	X300	
V8222130 204	V8651173 229	X300RX 54	

	<u> </u>	-	-	<b>^</b>
111				<u> </u>
				-


	<u> </u>	-	-	<b>^</b>
111				<u> </u>
				-






## **OUR TRUSTED FAMILY OF TOOL, EQUIPMENT & SAFETY BRANDS**









DIONEER



PEAKWORKS









#### **USA HEAD OFFICE**

SureWerx USA Inc. Elgin, IL USA 60123 800.323.7402 surewerx.com/usa